

QuMax Omni for Robustel R2110

INTEGRATED MULTI-BAND LTE OMNI ANTENNA + WIFI OMNI ANTENNA + BLUETOOTH ANTENNA + GPS ANTENNA + PLACE TO INSTALL ROBUSTEL R2110 (ALL-IN-ONE)

QuMax Omni all-in-one antenna for Robustel R2110 router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni LTE, Wi-Fi, Bluetooth and GPS antenna. If you use R2110 with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

Wi-Fi 7 support!

Note! This antenna comes in two different versions, depending on your router configuration. When you use R2110 supporting Power over Ethernet (PoE) please choose version "no PoE splitter". For R2110 without PoE support, please choose "PoE splitter" version. Compatible Robustel part numbers available in the specification below.

4G
LTE

Wi Fi
DUALBAND
2.4GHz
5GHz

BLUETOOTH

GPS

694-6000MHz

7 dBi

**OMNI
DIRECTIONAL**

IP 67

-40° TO +80°



OUTDOOR ANTENNA WORKS IN ANY
WEATHER CONDITIONS, IP67



ANTENNA PERFECTLY MATCHED WITH
THE ROBUSTEL R2110



ALL ANTENNAS AND ROBUSTEL
ROUTER INTEGRATED IN ONE
ENCLOSURE



MADE IN **EUROPE**



LTE SPECIFICATION

FREQUENCY	0.694-0.96 GHz 1.7 - 2.2 GHz 2.5 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 33, 34, 35, 36, 37, 38, 39, 44, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n95
GAIN	0.694 - 0.96 GHz : 4 dBi 1.7 - 2.2 GHz : 5 dBi 2.5 - 2.7 GHz : 6 dBi
VSWR	<1.50, max <2.50
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 4.7 - 6.0 GHz
GAIN	2.4 - 2.5 GHz: 6 dBi 4.7 - 6.0 GHz: 7 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIAL	BS, aluminum, PTFE, Fiberglass
INGRESS PROTECTION	IP67
CONNECTOR TYPE	RJ45
DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F

MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 60mm 0.98-2.36 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
WEIGHT	0.87kg
MOUNTING PLACE	Wall or mast or ceiling

COMPATIBLE PART NUMBERS

NO POE SPLITTER

B044722

B044730

B044733

B044735

B044737

B044738

B044742

B044743

B044744

POE SPLITTER

B044746


B044748

B044749


B044751

PLOTS


LTE VSWR

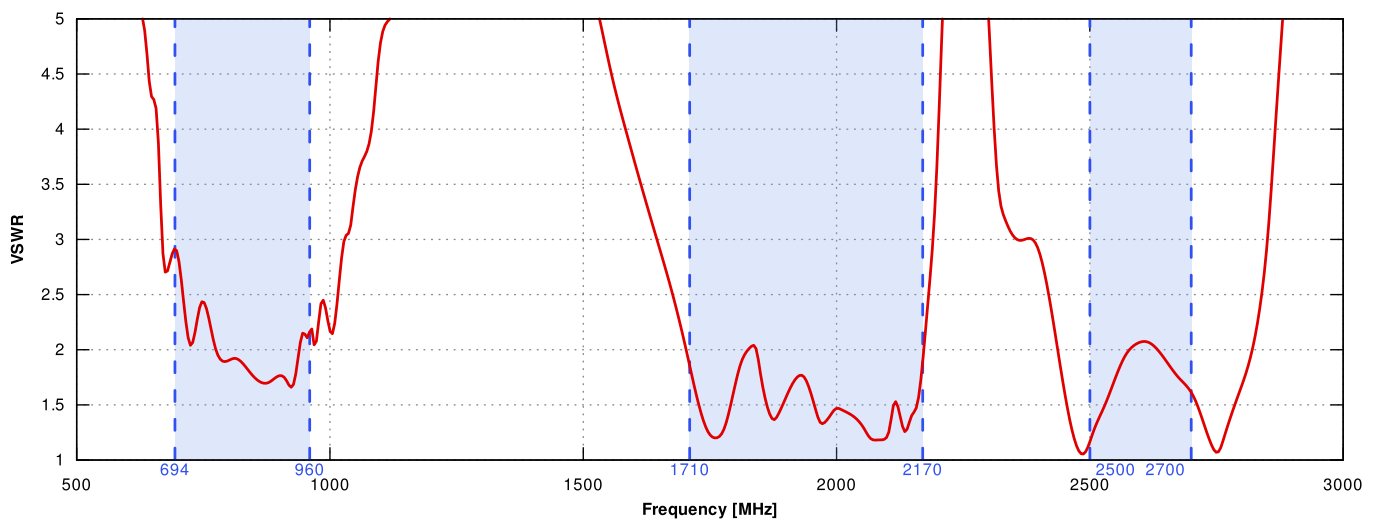


WI-FI VSWR

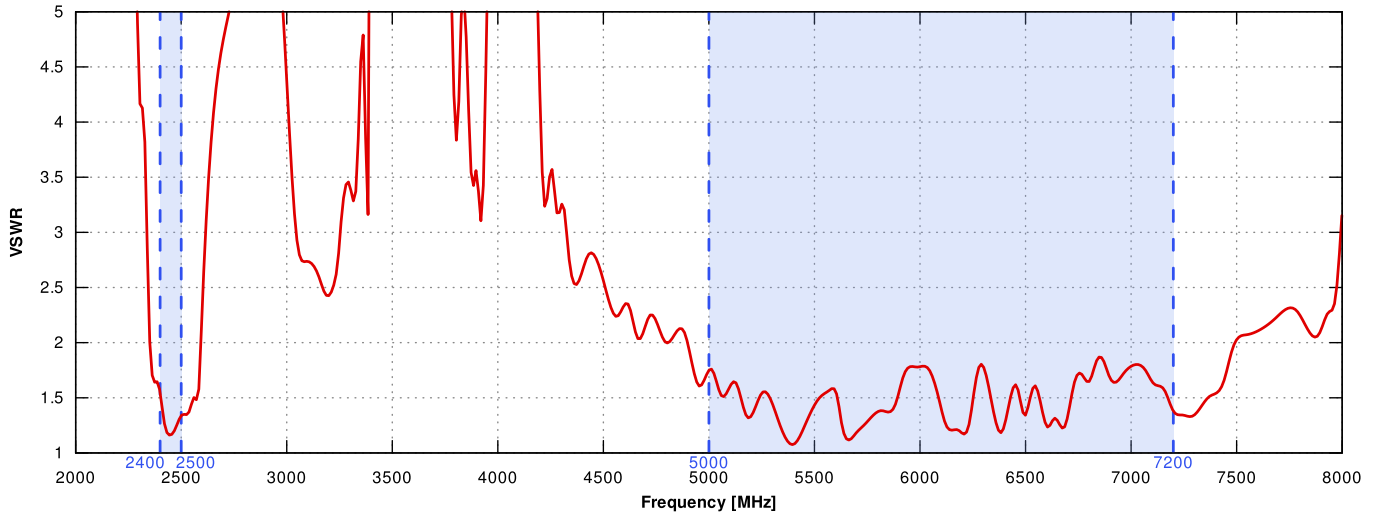


LTE Gain

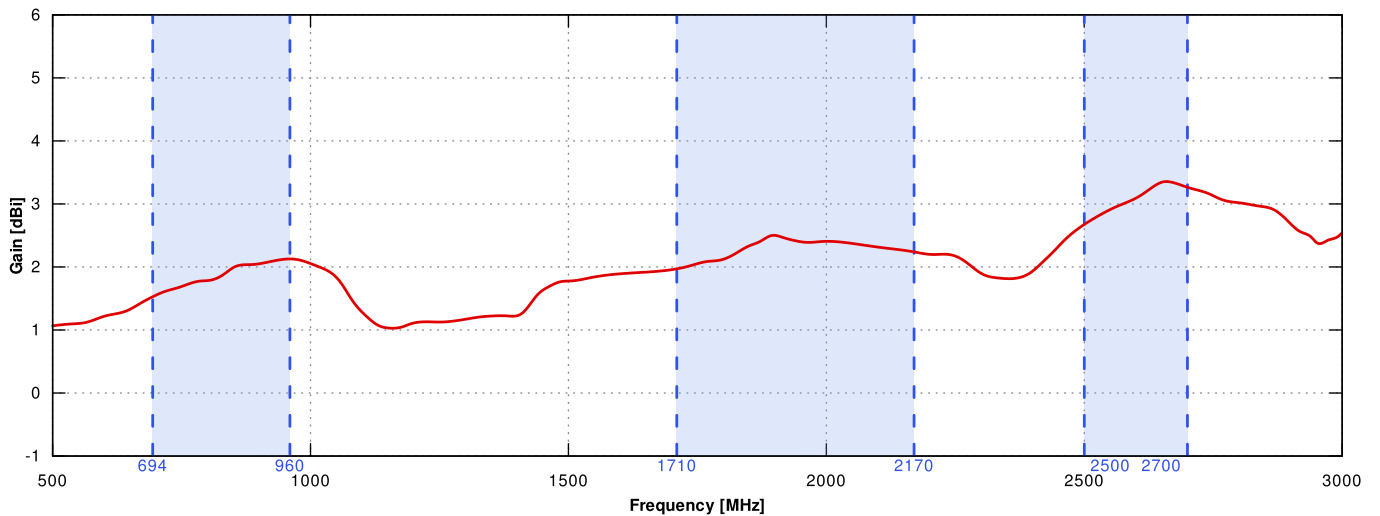



Wi-Fi Gain

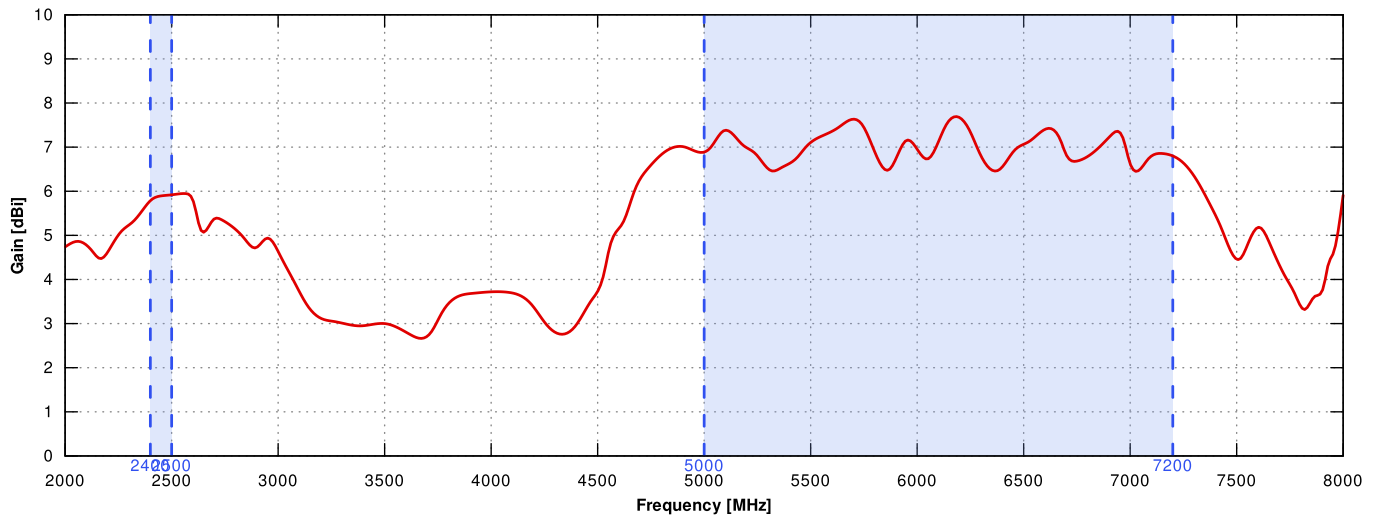



LTE from 700MHz to 900MHz

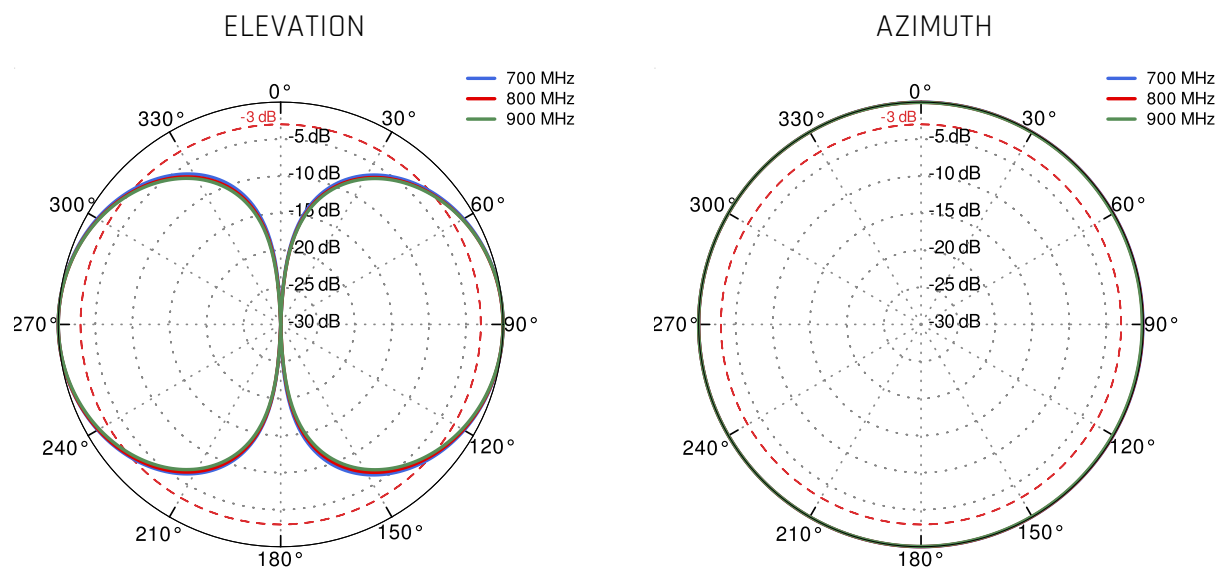


LTE from 1.71GHz to 2.17GHz

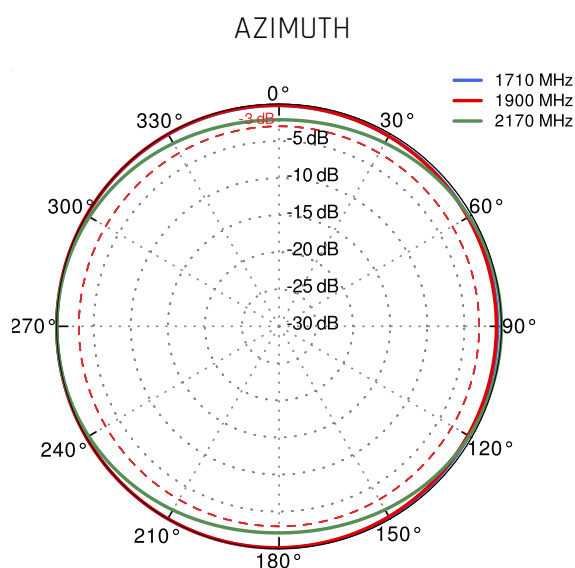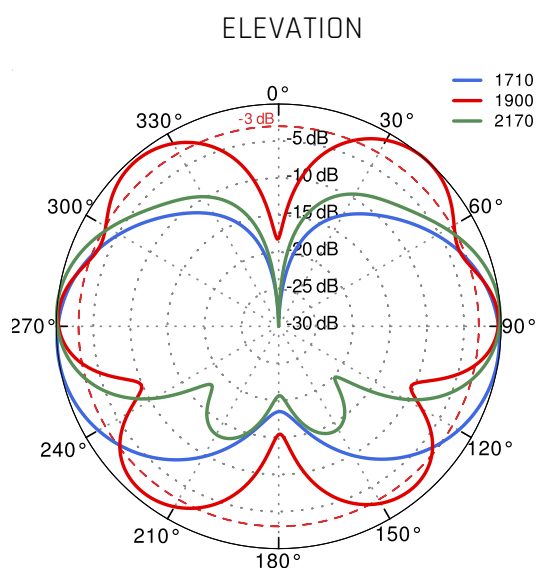

LTE from 2.3GHz to 2.7GHz

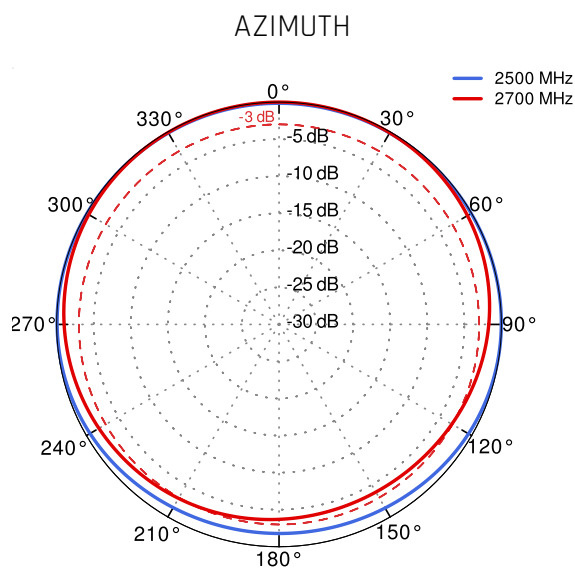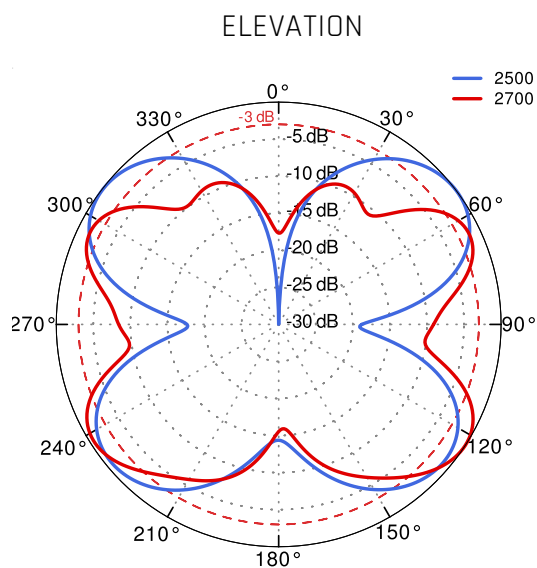

Wi-Fi 2.4GHz and 5GHz and 6GHz

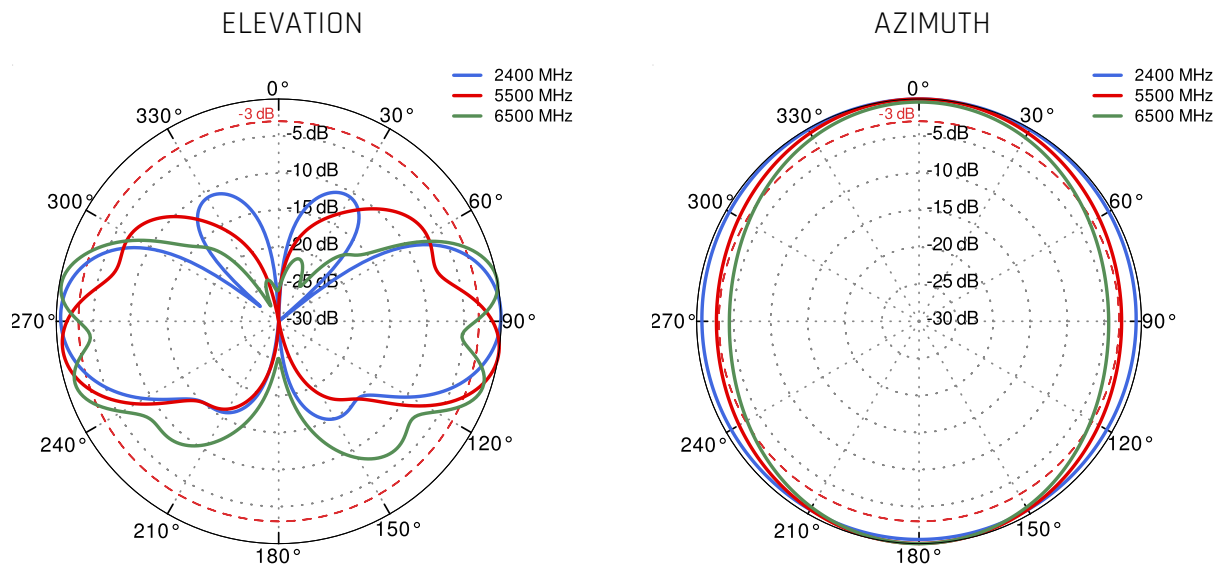

DIMENSIONS

