


QuMax for Peplink MAX Transit Duo Pro

INTEGRATED MULTI-BAND 5G DIRECTIONAL ANTENNA + WIFI OMNI ANTENNA + GPS ANTENNA + PASSIVE POE SPLITTER + PLACE TO INSTALL PEPLINK MAX TRANSIT DUO PRO (ALL-IN-ONE)


QuMax all-in-one antenna for Peplink MAX Transit Duo Pro router is dedicated to connections with long distance to base station. It has embedded directional 5G, Wi-Fi and GPS antenna. If you use MAX Transit Duo Pro with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure. It is the first choice for fixed installations in industrial environment.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.

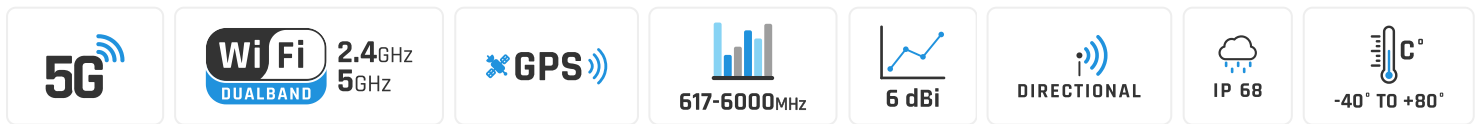


 OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP68

 ANTENNA PERFECTLY MATCHED WITH THE PEPLINK MAX TRANSIT DUO PRO

 ALL ANTENNAS AND PEPLINK ROUTER INTEGRATED IN ONE ENCLOSURE

 MADE IN **EUROPE**

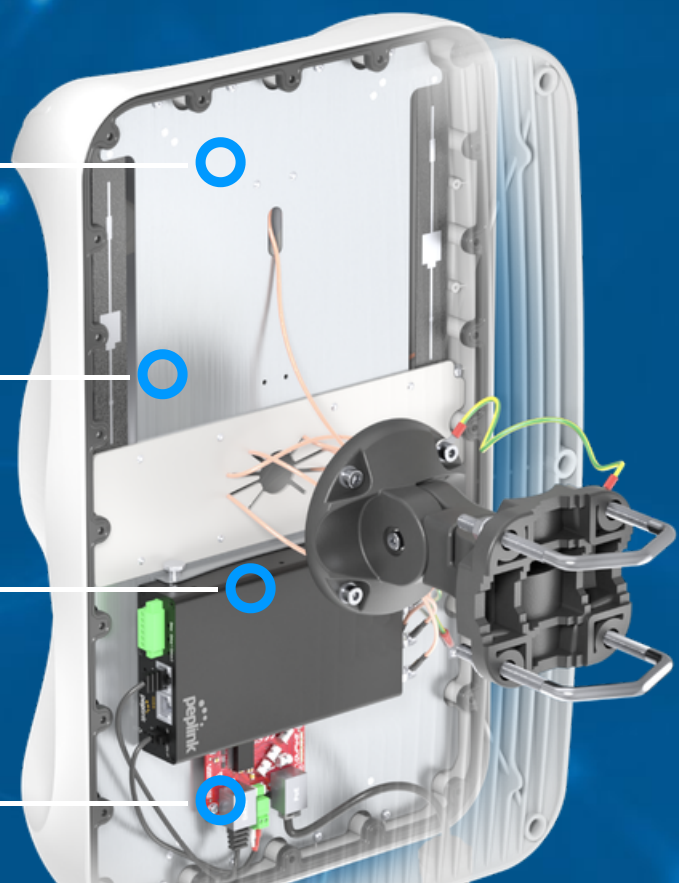

5G/LTE SPECIFICATION

| | |
|----------------------------|--|
| FREQUENCY | 617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.6 GHz 4.7 - 6.0 GHz |
| SUPPORTED LTE BANDS | 1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106 |
| SUPPORTED 5G BANDS | n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n65, n66, n67, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256 |
| GAIN | 617 - 960 MHz : 6 dBi 1.7 - 2.7 GHz : 7 dBi 3.3 - 4.6 GHz : 7 dBi 4.7 - 6.0 GHz : 5.5dBi |
| VSWR | <2.00, max <3.00 |
| BEAMWIDTH | 80°/80° ±15° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |

WI-FI SPECIFICATION

| | |
|---------------------|---|
| FREQUENCY | 2.4 - 2.5 GHz 5.0 - 7.2 GHz |
| GAIN | 2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi |
| VSWR | < 1.50, max < 2.00 |
| BEAMWIDTH | 360°/25° +/- 5° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |

MECHANICAL SPECIFICATION


| | |
|--|---|
| MATERIAL | BS, aluminum, PTFE, Fiberglass |
| INGRESS PROTECTION | IP68 |
| CONNECTOR TYPE | RJ45 |
| DIMENSIONS | 486.0 x 292.2 x 210 mm 19.13 x 11.50 x 8.27 inch |
| WEIGHT | 1.8 kg 3.97 lbs |
| OPERATING TEMPERATURE | From -40°C to 75°C From -40°F to 167°F |
| ENCLOSURE RECOMMENDED TIGHTENING TORQUE | 0.6 - 0.8 Nm |

MOUNTING KIT


| | |
|----------------------------|--|
| DIMENSIONS | 9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch |
| REGULATION RANGE | +/- 30° |
| MAST DIAMETER RANGE | 25 - 66mm 0.98-2.60 inch |
| MATERIAL | Polyamide with fiberglass + galvanized steel U-Bolts |
| WEIGHT | 0.87kg |
| MOUNTING PLACE | Wall or mast or ceiling |

PLOTS


VSWR for 5G/LTE antenna

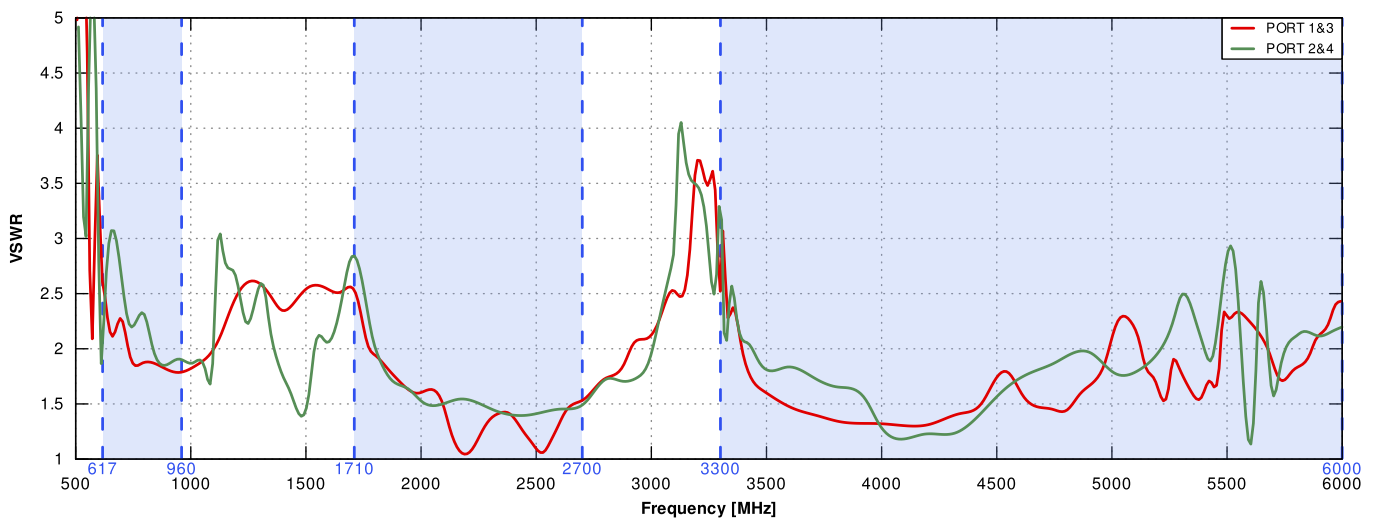


VSWR for Wi-Fi antenna

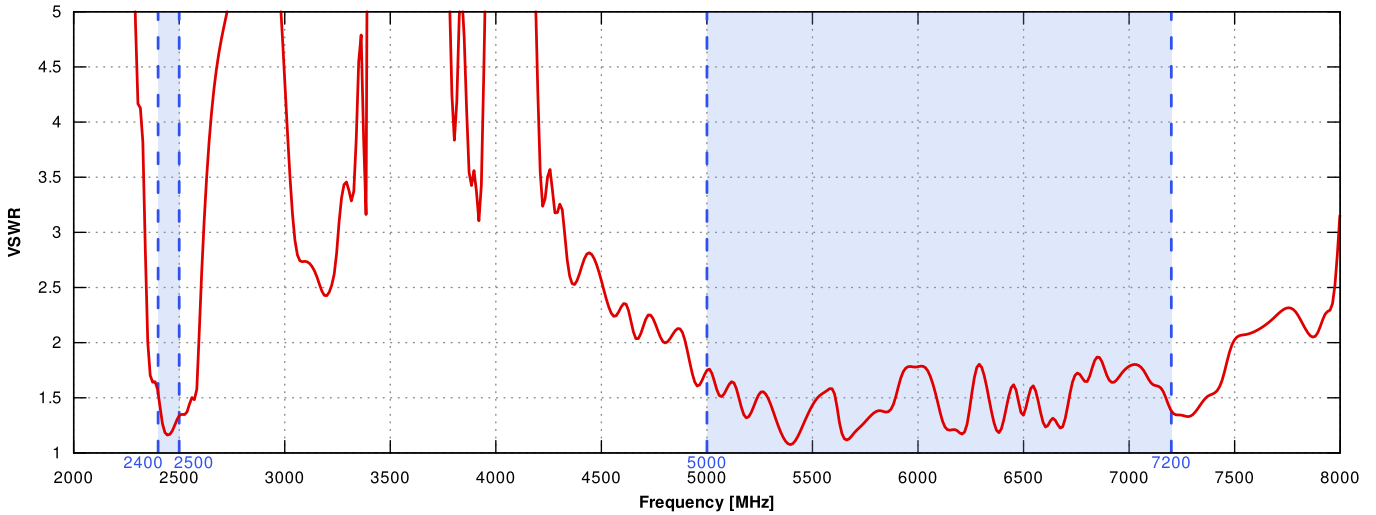


Gain for 5G/LTE antenna

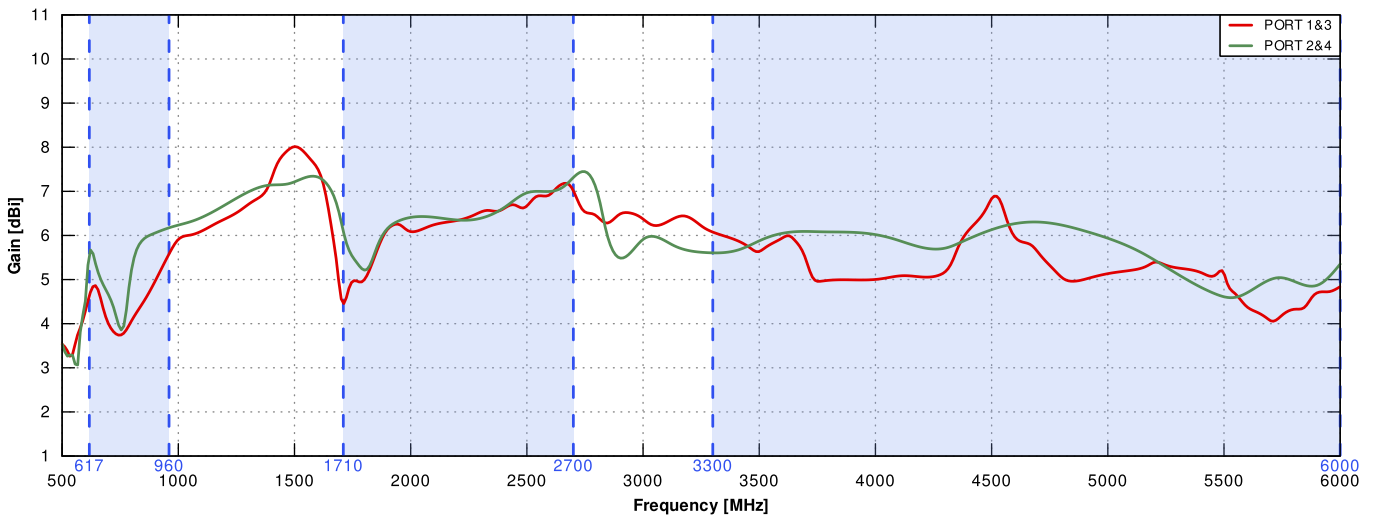


Gain for Wi-Fi antenna

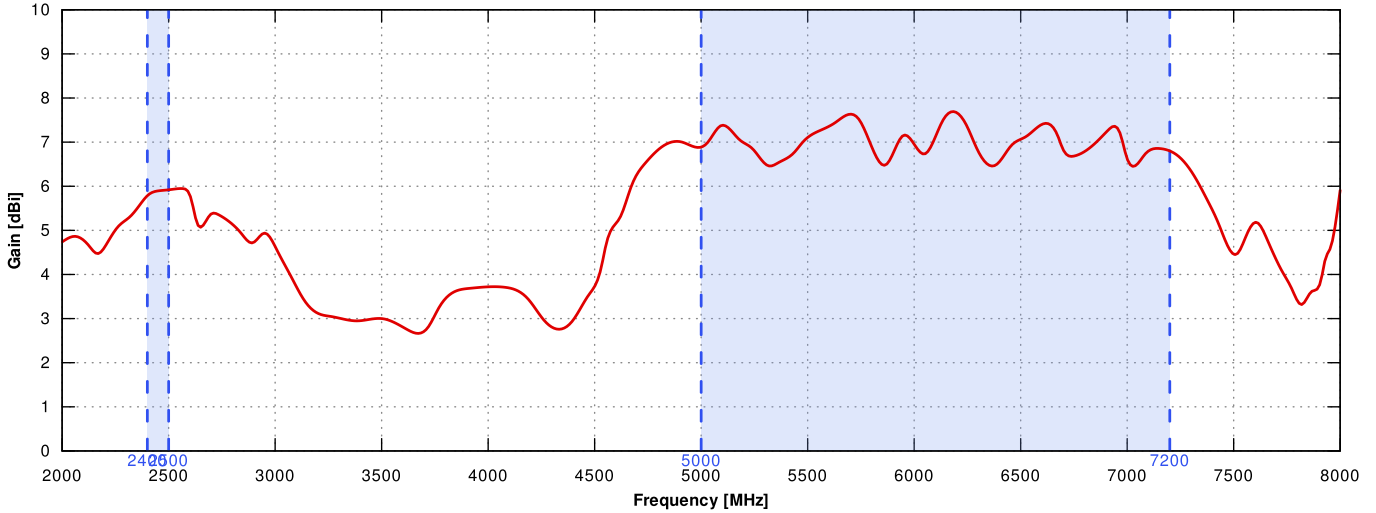


5G/LTE Port 1/3 from 650MHz to 950MHz

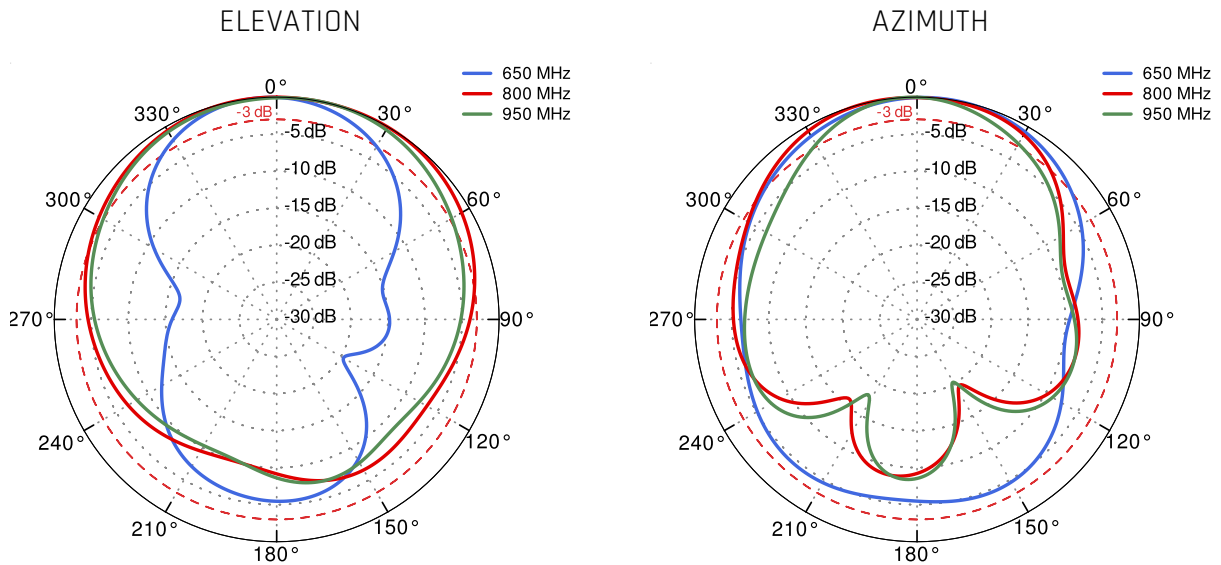


5G/LTE Port 1/3 from 1.71GHz to 2.17GHz

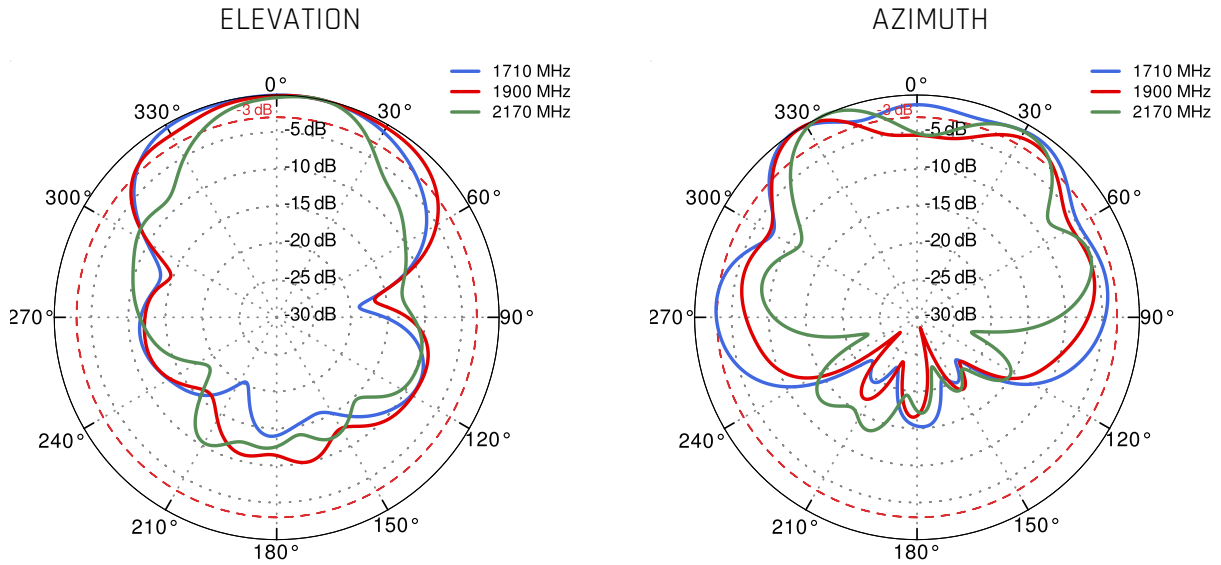


5G/LTE Port 1/3 from 2.3GHz to 2.7GHz

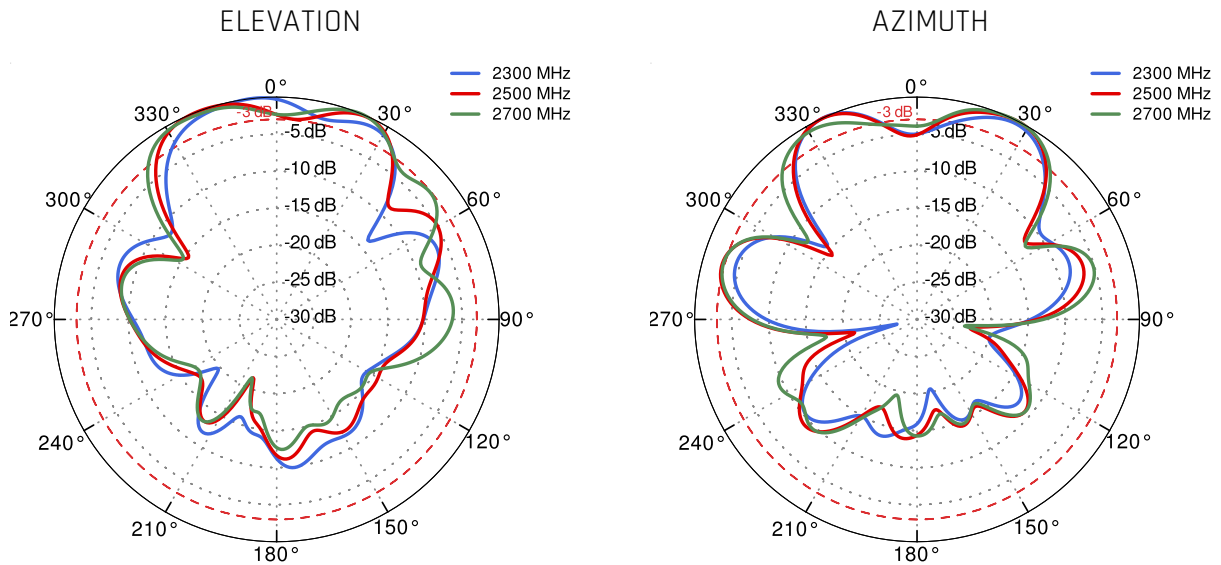


5G/LTE Port 1/3 from 3.3 GHz to 3.8 GHz

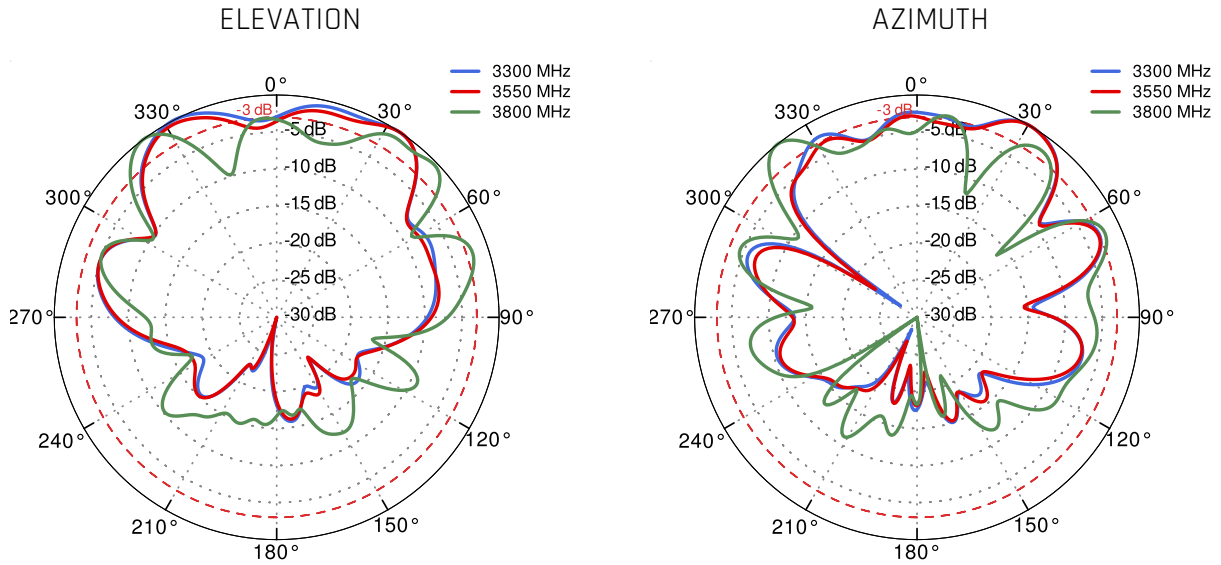


5G/LTE Port 1/3 from 4.2 GHz to 4.6 GHz

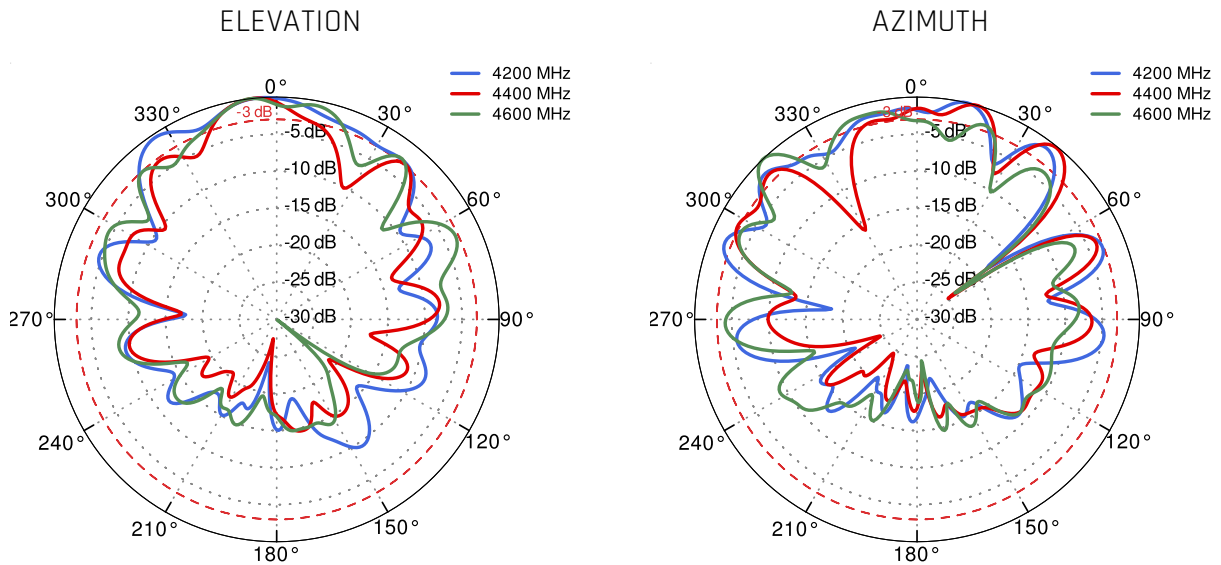


5G/LTE Port 1/3 from 5.0 GHz to 5.9 GHz

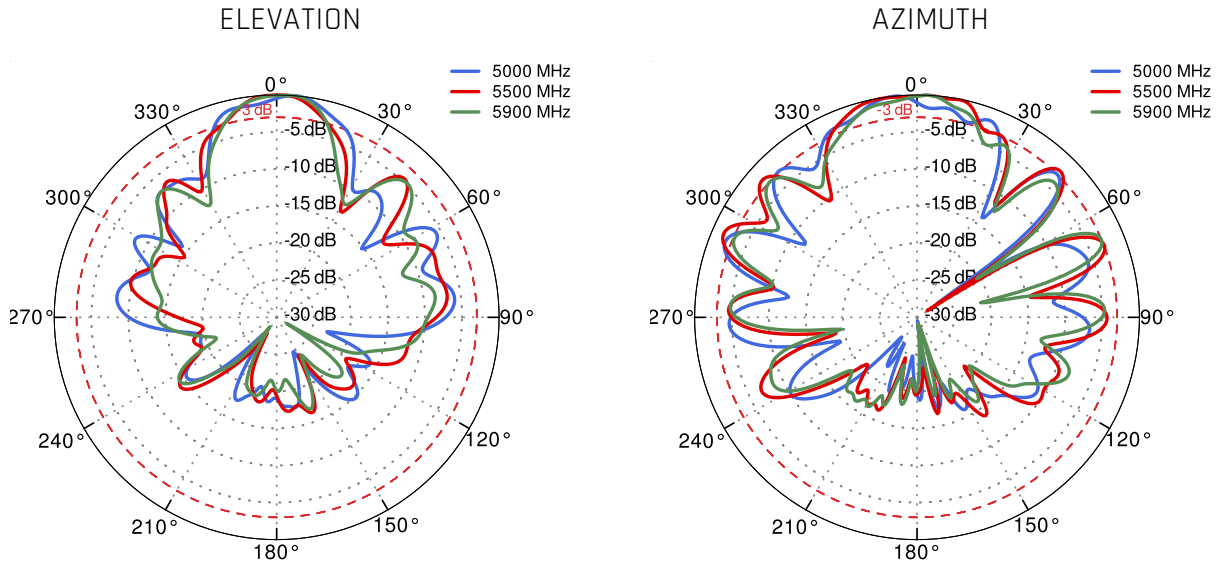


5G/LTE Port 2/4 from 650 MHz to 950 MHz

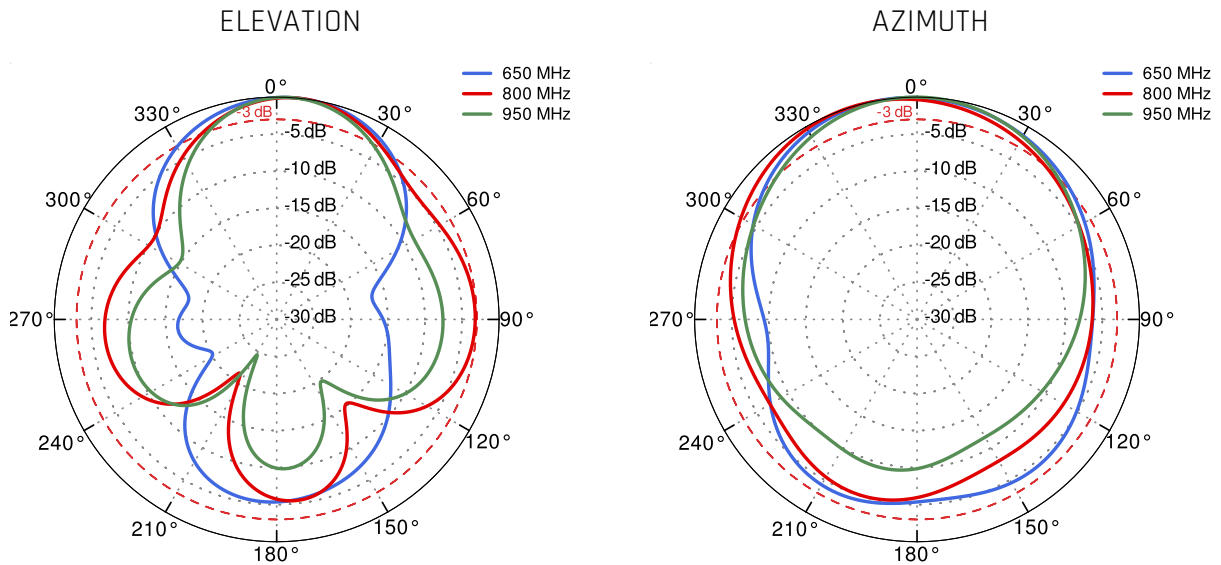


5G/LTE Port 2/4 from 1.71 GHz to 2.17 GHz

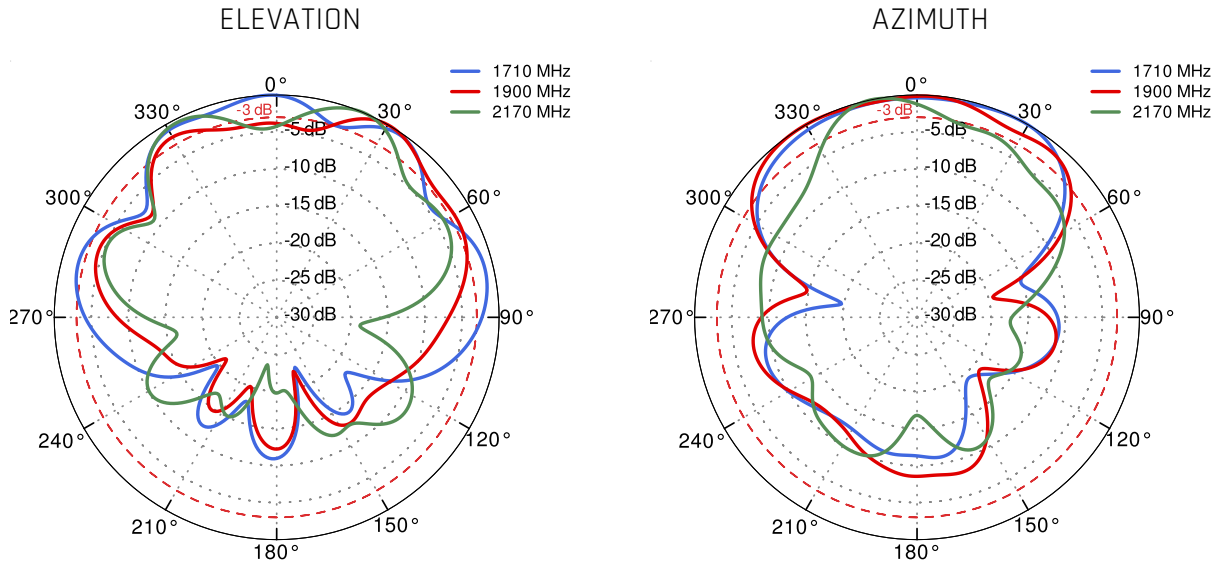


5G/LTE Port 2/4 from 2.3 GHz to 2.7 GHz

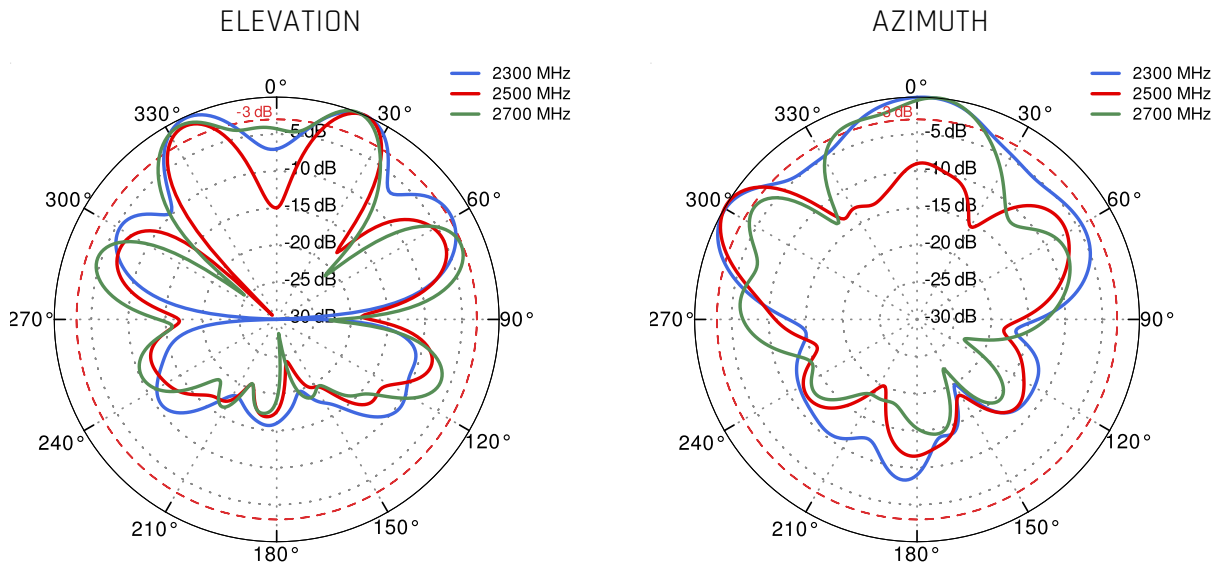


5G/LTE Port 2/4 from 3.3 GHz to 3.8 GHz

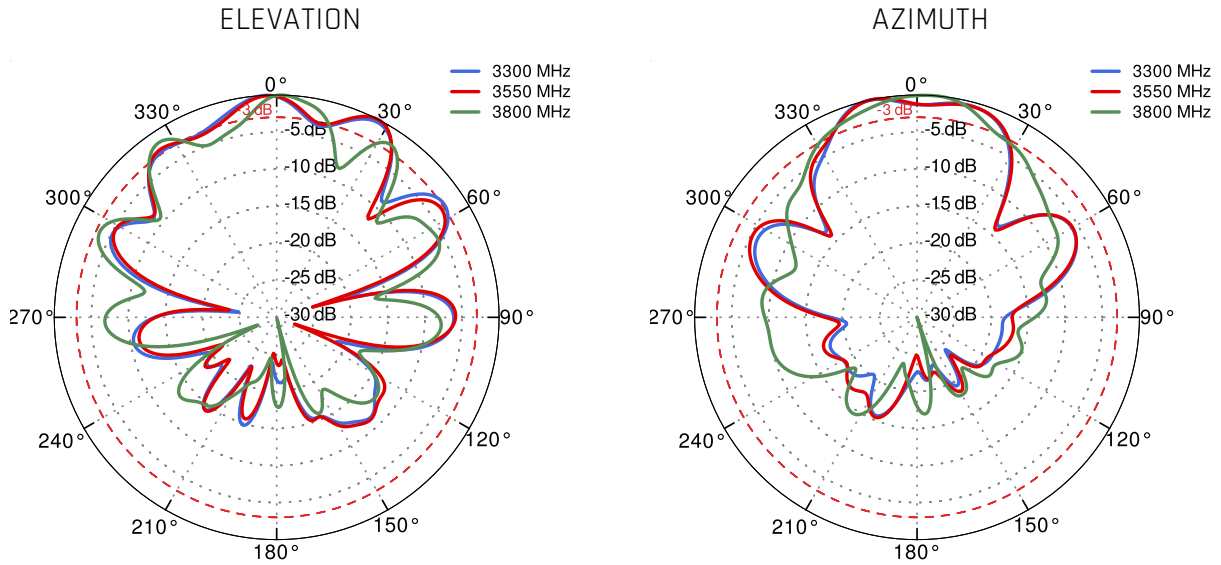


5G/LTE Port 2/4 from 4.2 GHz to 4.6 GHz

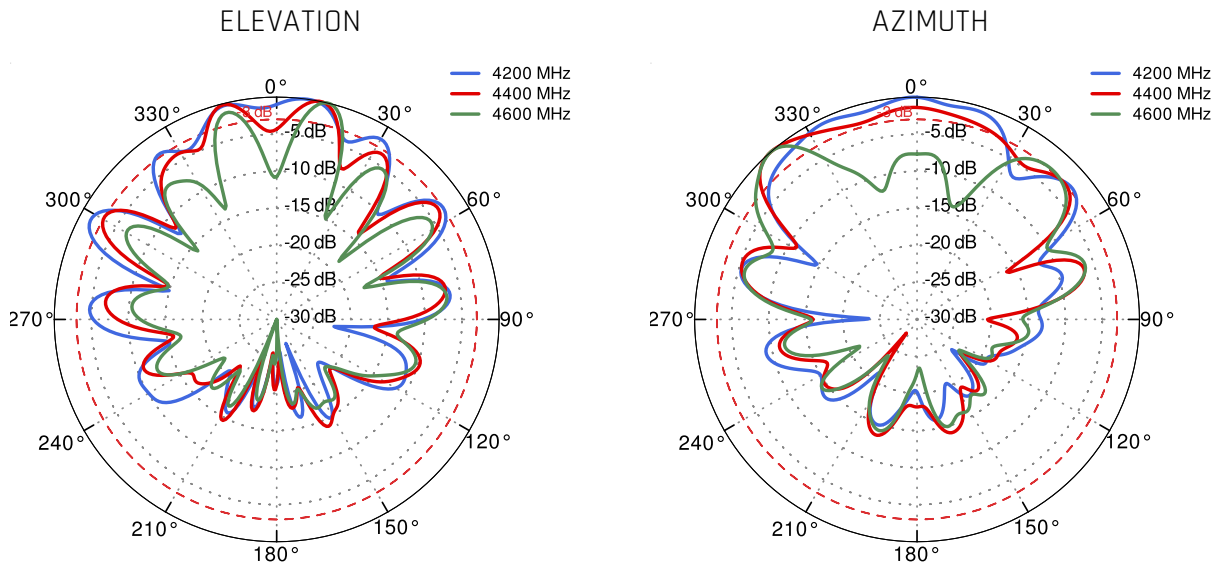

5G/LTE Port 2/4 from 5.0 GHz to 5.9 GHz

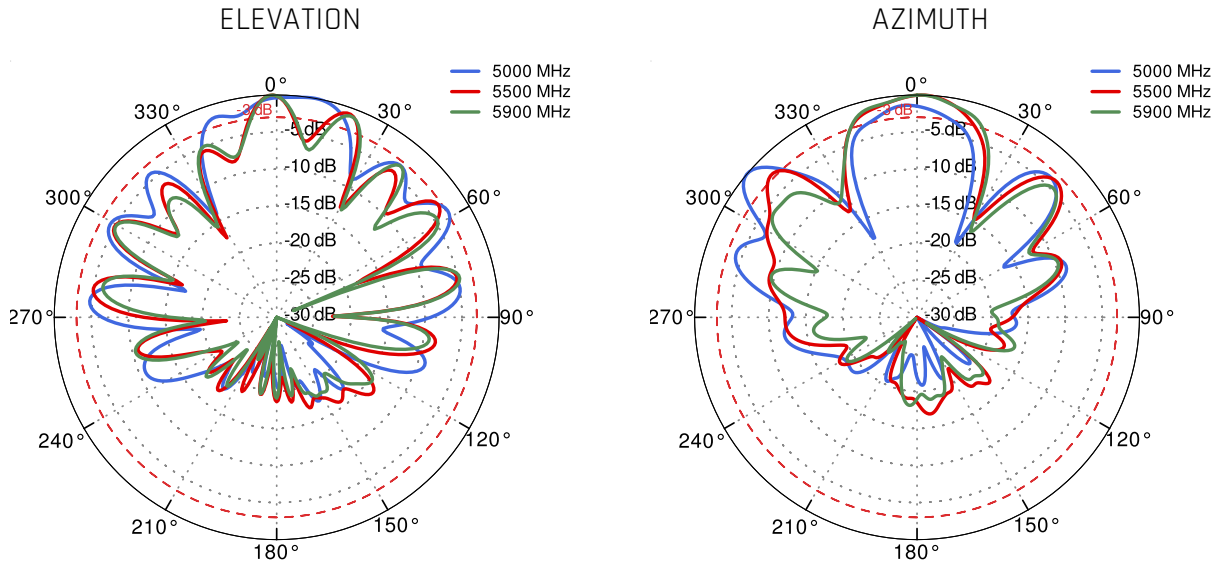

Wi-Fi From 2.4 GHz to 6.5 GHz

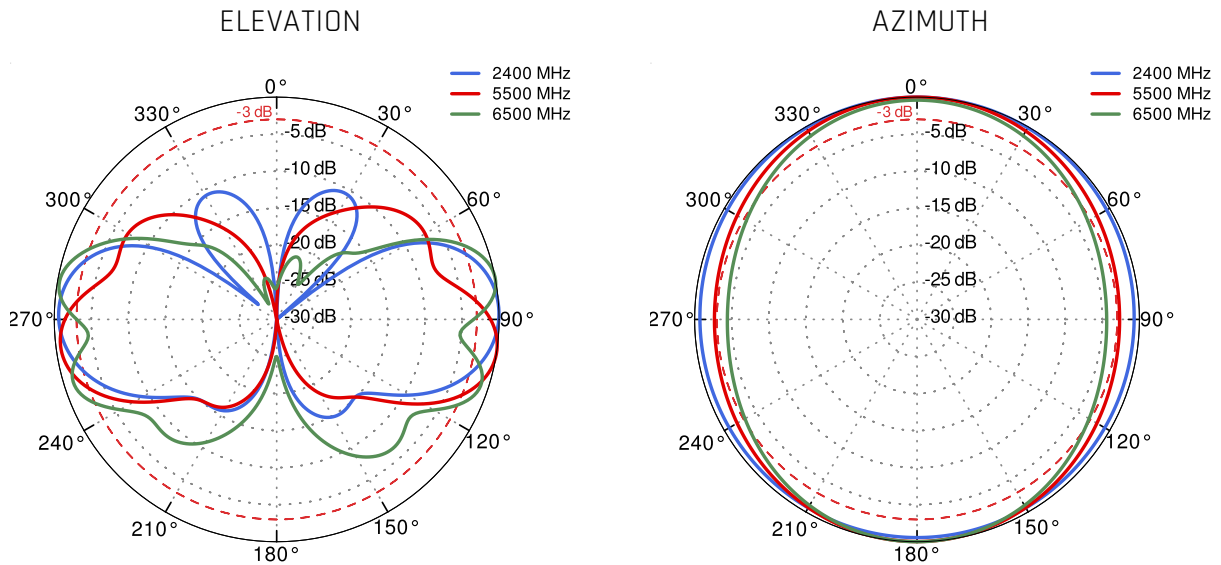

DIMENSIONS

