

# QuOmni LTE MIMO 2x2

## Omnidirectional multiband LTE MIMO 2x2 antenna

QuOmni LTE omnidirectional MIMO 2x2 LTE antenna is working in Vertical polarization, it's desired for LTE/3G/2G connections. The antenna can be used for the most popular LTE bands (e.g. 3,7,20), frequencies 694-2700 MHz. That antenna is predicted to be installed on the buildings (on the pole or on the wall) as the client antenna or on the moving points like trains, buses, lorries, yachts, boats to receive Internet by LTE/3G. It's compatible with Teltonika: RUT240, RUT900, RUT950, RUT955, RUTX09, RUTX11 and other MIMO 2x2 LTE/3G/2G modems and routers.



OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP68



GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET



TWO SMA CONNECTORS



360° BEAMWIDTH



4DBI GAIN



MADE IN **EUROPE**



## LTE ANTENNA SPECIFICATION

<b>FREQUENCY</b>	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
<b>GAIN</b>	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
<b>SUPPORTED LTE/5G BANDS</b>	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 45, 50, 51, 53, 54, 65, 66, 67, 68, 69, 70, 71, 74, 75, 76, 85, 103, 106, 111, 252, 253, 254, 255, 256, n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n24, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n50, n51, n53, n54, n65, n66, n67, n68, n70, n71, n74, n75, n76, n80, n81, n82, n83, n84, n85, n86, n89, n90, n91, n92, n93, n94, n95, n97, n98, n99, n100, n101, n106, n109, n110, n250, n251, n252, n253, n254, n255, n256
<b>VSWR</b>	<1.60, max <2.00
<b>BEAMWIDTH</b>	360°/35° ±5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## MECHANICAL SPECIFICATION

<b>MATERIALS</b>	ABS, aluminum, PTFE
<b>CONNECTOR TYPE</b>	2x SMA plug
<b>INGRESS PROTECTION</b>	IP68
<b>DIMENSIONS</b>	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
<b>WEIGHT</b>	1.5 kg 3.31 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 80°C From -40°F to 176°F
<b>CABLE LENGTH</b>	5m (P/N: A0LM2) or 10m (P/N: A0LM2-1)
<b>CABLE TYPE</b>	LMR195 white
<b>MAST DIAMETER</b>	25-66 mm 0.98-2.60 inch

# FREQUENCY BANDS

**LTE / 4G GSM**

617 MHz	5	6	8	12	13	14	17	960 MHz
	18	19	20	26	27	28	29	
	44	67	68	71	85	103	106	
	n5	n8	n12	n13	n14	n18	n20	
	n26	n28	n29	n67	n68	n71	n81	
	n82	n83	n85	n89	n100	n106		

**LTE / 4G UMTS**

1710 MHz	1	2	3	4	9	10	25	2170 MHz
	33	34	35	36	37	39	111	
	n1	n2	n3	n25	n34	n39	n80	
	n84	n86	n95	n98	n101			

**LTE / 4G WCS DARS**

2300 MHz	30	40	n30	n40	n97	2400 MHz
-------------	----	----	-----	-----	-----	-------------

**LTE / 4G**

2400 MHz	7	38	41	53	69	n7	n38	2700 MHz
	n41	n53	n90					

## **COMPATIBLE ROUTERS**

VARIANTS: AOLM2, AOLM2-1

**TELTONIKA**

RUT200, RUT206, RUT230, RUT240, RUT241, RUT260, RUT281, RUT900, RUT901, RUT950, RUT951, RUT951 PoE+, RUT955, RUT956, RUT981, RUT986, RUTC40, RUTM09, RUTM11, RUTM16, RUTM56, RUTX09, RUTX11, TRB160

**ROBUSTEL**

EG5100, LG5100, R1500, R1510, R1511P, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R2110, R2120, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010

**ACKSYS**

AirBox LTE, AirWan

**ADVANTECH**

ICR-2031

**ANYBUS**

Wireless Router WLAN

**CISCO**

Z4C

**COMSET**

CM210A-W, CM210Q-W, CM510Q-W, CM685T-W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G, CM820Q-4, CM820Q-6, CM820T-W, CM820V-4, CM820V-W

**D-LINK**

DWR-960, G415 AX1500, G416 AX1500, N300 4G

**DIGI**

6310-DX, 6330-MX, EX12, EX15, IX10, IX15, IX20, IX30, WR31

**ERICSSON (CRADLEPOINT)**

CBA550, E100, E102, IBR200, IBR600C, IBR900, L950, R500, R920, S400, S700

**FORTINET**

FEX-101F, FEX-201F, FEX-211E, FEX-212F, FortiGate Rugged 60F-3G4G, FortiGate Rugged 70F-3G4G

<b>FOUR-FAITH</b>	4G Cellular Router F-R100, 4G Industrial Computer F4931-R2H, 4G Industrial Computer F4932-R2H-DF1, Android Industrial Computer F4932-R1Q, Cellular Wireless Router F-R200, Dual Sim 4G Router F3X46, Dual-sim WiFi Router F3946, Industrial WiFi Router F3X36Q, LAN Port Router F3X26 V2, LTE Industrial Router F3X27 V2, LTE Wireless Router F3x36
<b>INHAND</b>	IR302
<b>MIKROTIK</b>	RB912, RB922, RBM11G, RBM33G
<b>MILESIGHT</b>	UR32
<b>OPTION</b>	CloudGate LTE WW CAT4
<b>PEPLINK</b>	Balance 20X, MAX BR1 Classic, MAX BR1 ENT, MAX BR1 IP55, MAX BR1 M2M, MAX BR1 Mini, MAX BR1 Mini (HW3), MAX BR1 Mini Core (HW3), MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Slim
<b>PROROUTE</b>	H685 4G Router, H685 LTE 4G CAT6 Router, H820 M2M 4G Router
<b>ROBUSTEL</b>	EG5100, LG5100, R1500, R1510, R1511P, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R2110, R2120, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010
<b>SEMTECH (SIERRA WIRELESS)</b>	AirLink LX40, AirLink LX60, AirLink MP70, AirLink RV50X, AirLink RV55, AirLink RX55
<b>SIEMENS</b>	6GK5876-4AA00-2BA2, 6GK5876-4AA00-2DA2, 6GK5876-4AA10-2BA2
<b>TELTONIKA</b>	RUT200, RUT206, RUT230, RUT240, RUT241, RUT260, RUT281, RUT900, RUT901, RUT950, RUT951, RUT951 PoE+, RUT955, RUT956, RUT981, RUT986, RUTC40, RUTM09, RUTM11, RUTM16, RUTM56, RUTX09, RUTX11, TRB160
<b>WAVETEL</b>	W2400 LTE , W3600 4G/LTE Dual WAN, W3604 Multi-WAN, W3608 Multi-WAN, W421, W4600, W4600-S2
<b>WLINK</b>	ER120, G200, G510, G520, R210, R220, R520

ZYXEL


LTE3202-M437, LTE3301-PLUS, LTE5388-M804, LTE5398-M904

OTHER


2 \* SMA, 3 \* SMA

## PLOTS



### VSWR

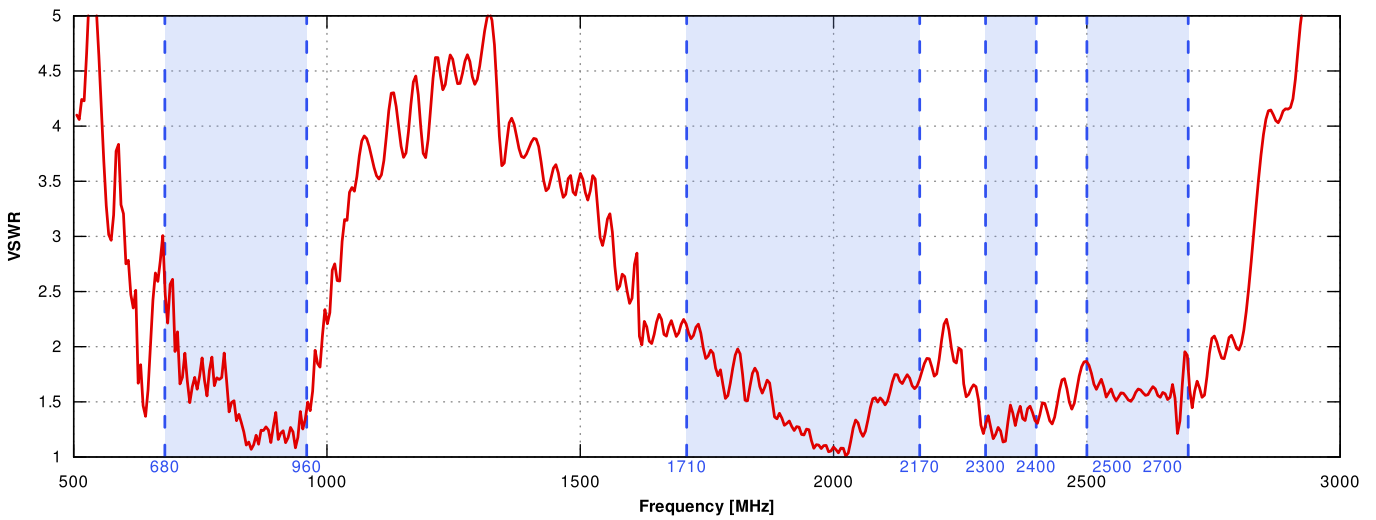



### Gain

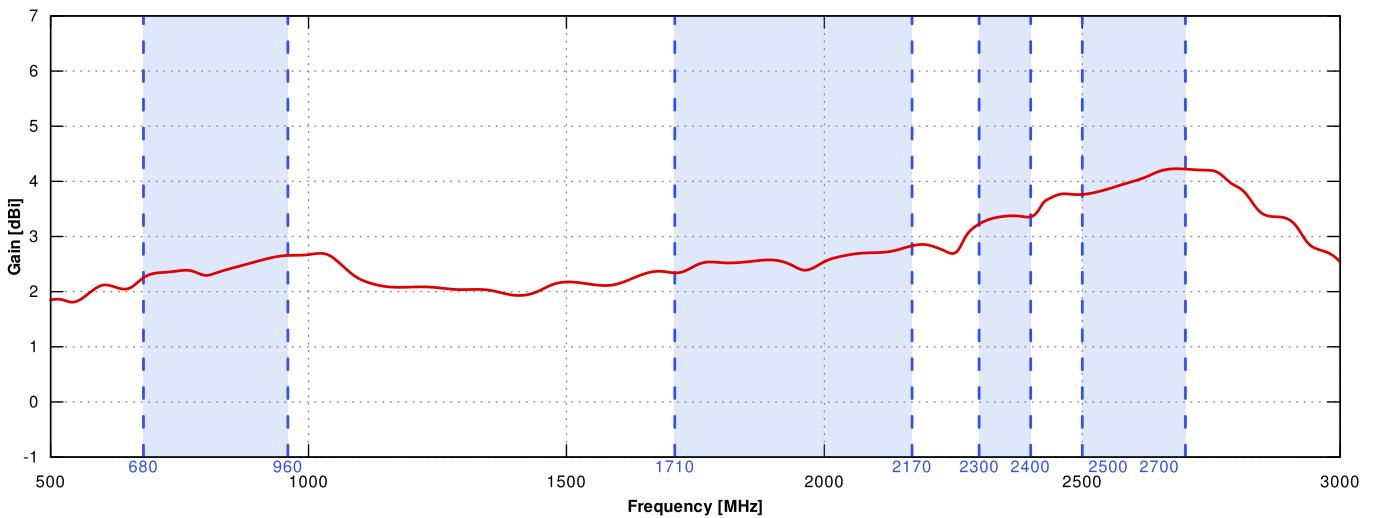


### From 700MHz to 900MHz

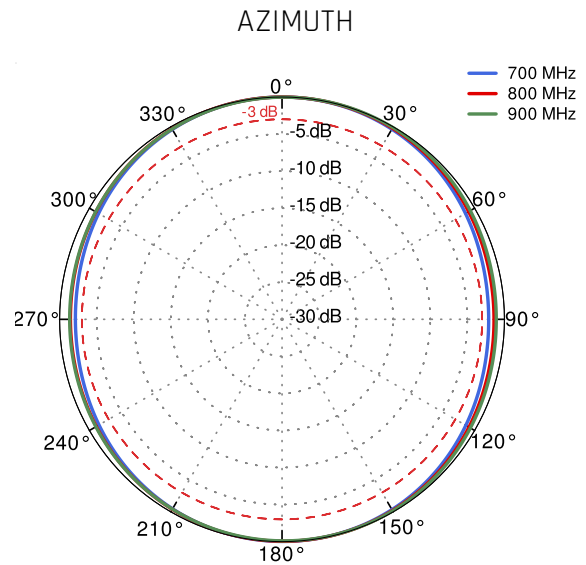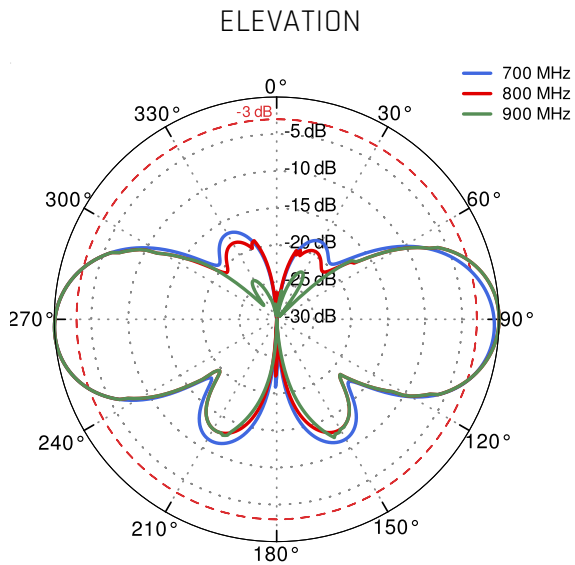

### From 1.71GHz to 2.17GHz

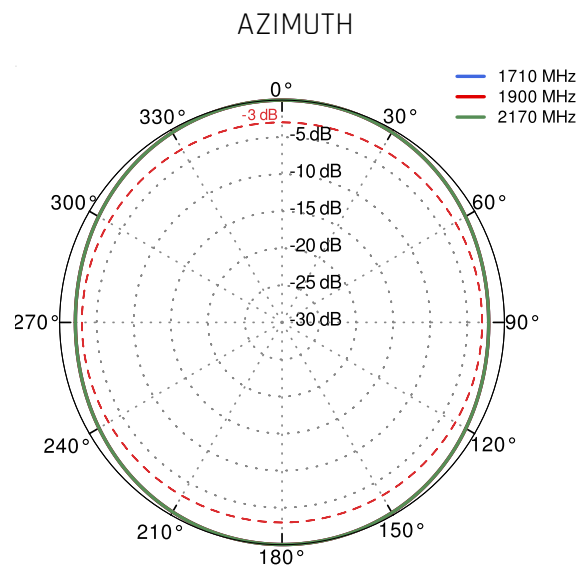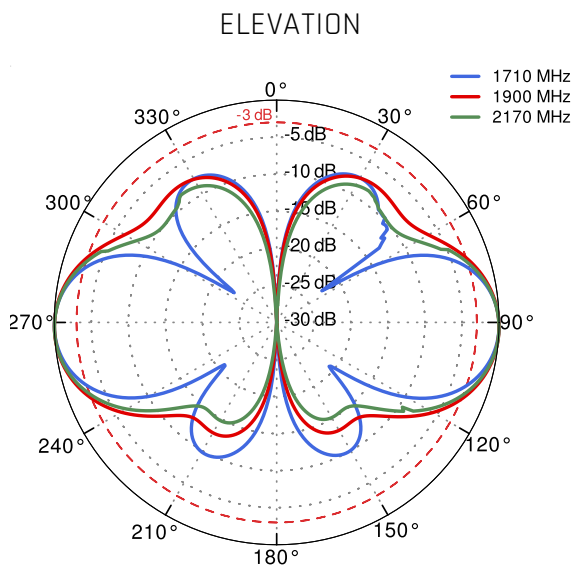

From 2.3GHz to 2.7GHz

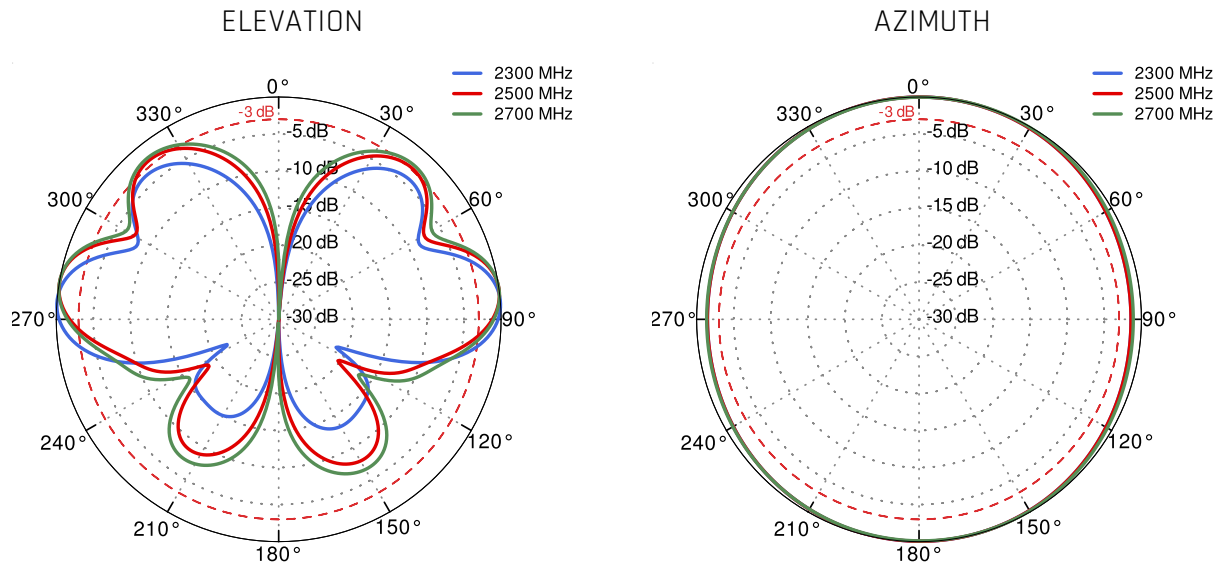

## DIMENSIONS

