

QuSpot for RUT2xx ver. US (Band71)

Integrated multi-band LTE omni antenna ver. US + WiFi omni antenna + place to install Teltonika RUT241, RUT240 or 230 (All-in-one)

QuSpot omnidirectional LTE antenna ver. US for Teltonika **RUT260, RUT241, RUT240, RUT230 or RUT200 routers** is a perfect outdoor device for mobile and fixed installations e.g. CCTV, hotspots, industrial areas, campervans, ships etc.. In addition to having omnidirectional, multi-band LTE antennas, **it has also embedded omnidirectional Wi-Fi antenna**. If you use RUT2xx with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

4G

LTE

B
A
N
D
71

617-3800MHz

Wi Fi

2.4GHz



4 dBi

OMNI
DIRECTIONAL

IP 67



-40° TO +80°



OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



WALL OR MAST MOUNTING SYSTEM



MADE IN **EUROPE**



LTE ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.2 GHz 2.3 - 2.7 GHz 3.3 - 3.8 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 3.5 dBi 2.3 - 2.7 GHz : 3.5 dBi 3.3 - 3.8 GHz : 4dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz
GAIN	6 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
MAST DIAMETER	40-60 mm 1.57-2.36 inch

FREQUENCY BANDS

LTE / 4G GSM	694 MHz	5	8	12	13	14	17	18	19	20	26	27	28	29	44	67	68	85	103	n81	n82	n83	n89	100	960 MHz
LTE / 4G UMTS	1710 MHz	1	2	3	4	9	10	25	33	34	35	36	37	39	n80	n84	n86	n95	n98	n101					2170 MHz

LTE / 4G WCS DARS

2300
MHz

30

40

n97

2400
MHz

LTE / 4G

2400
MHz

7

38

41

53


69

n90


2700
MHz

PLOTS


VSWR for Wi-Fi antenna

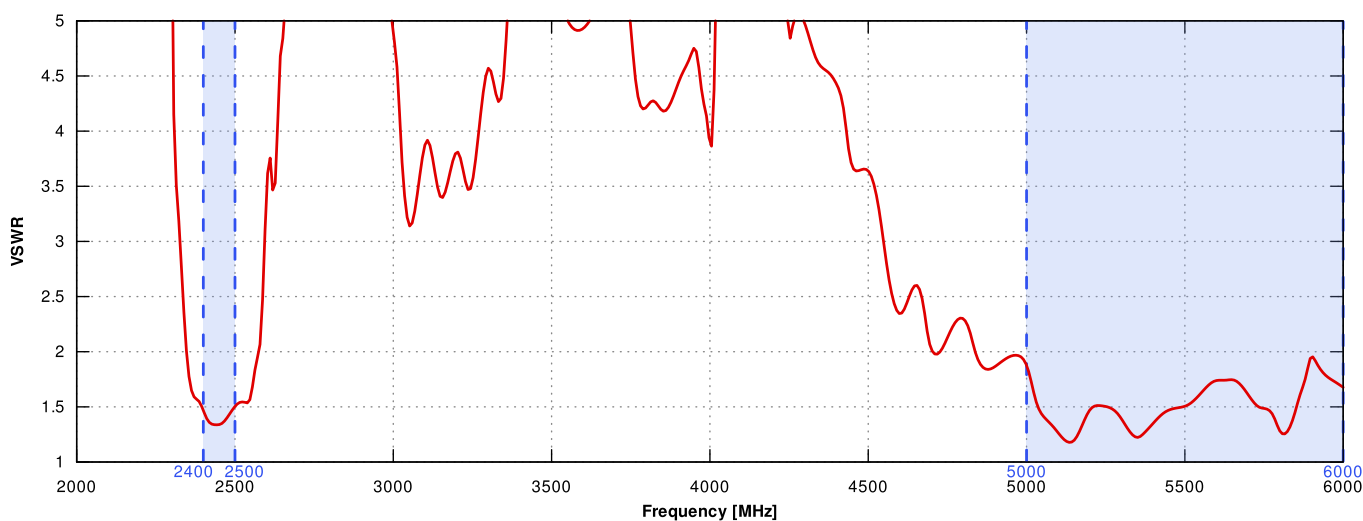


VSWSR for LTE antenna

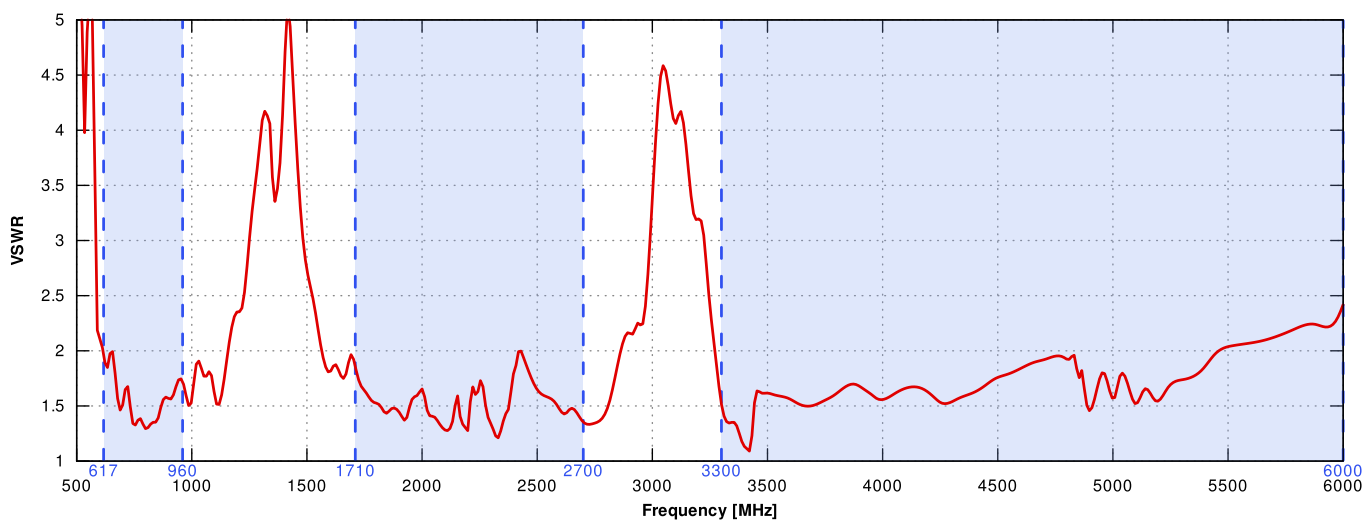



Gain for Wi-Fi antenna

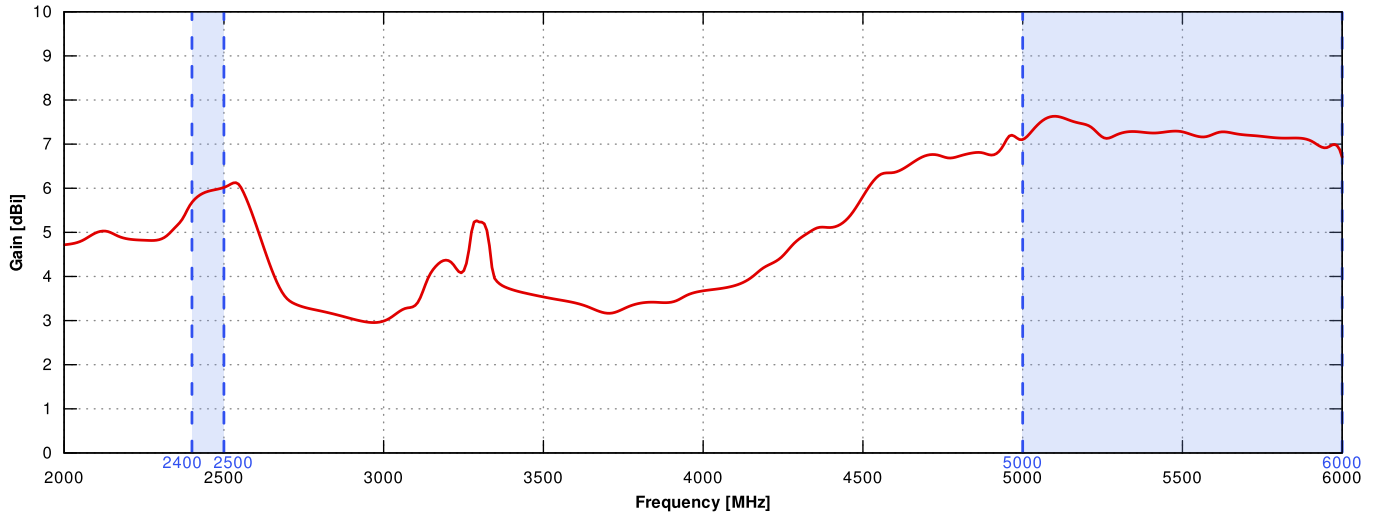



Gain for LTE antenna

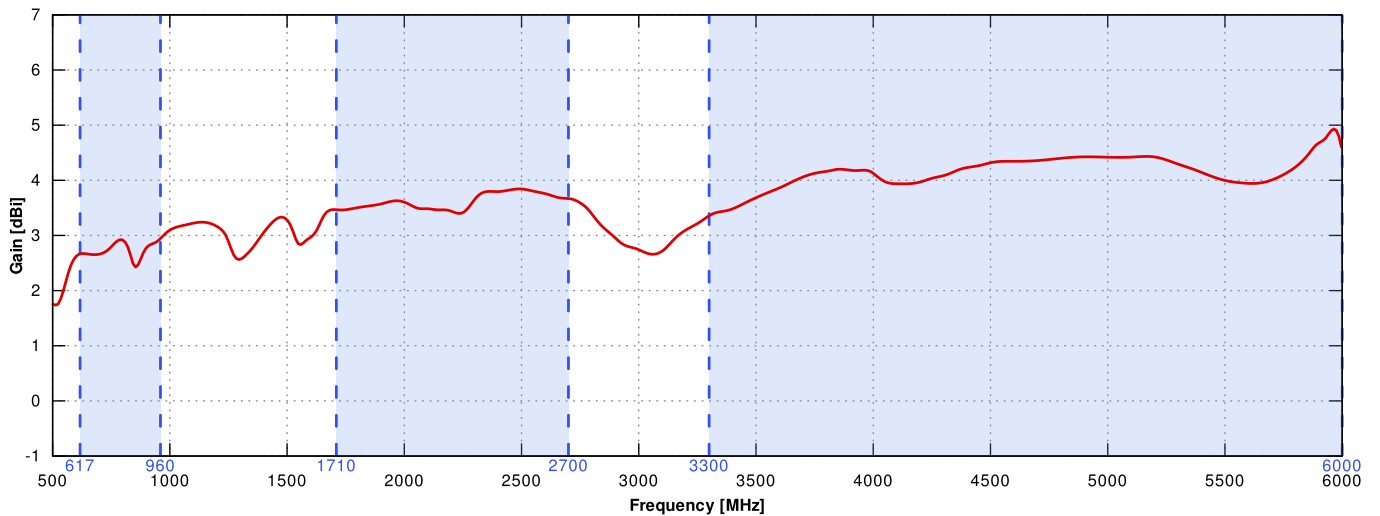



LTE from 650MHz to 950MHz

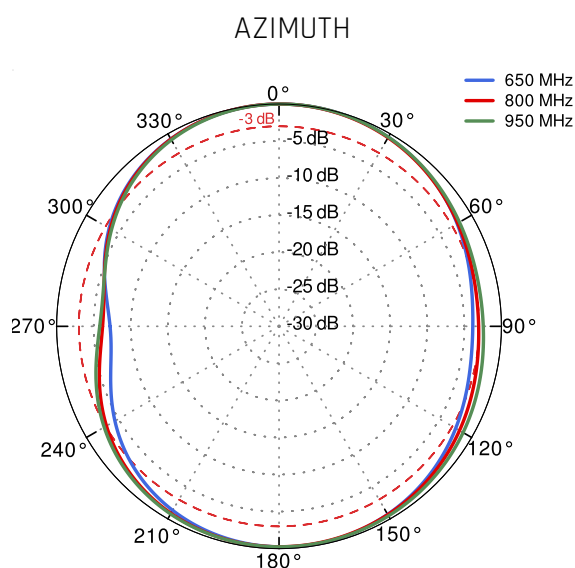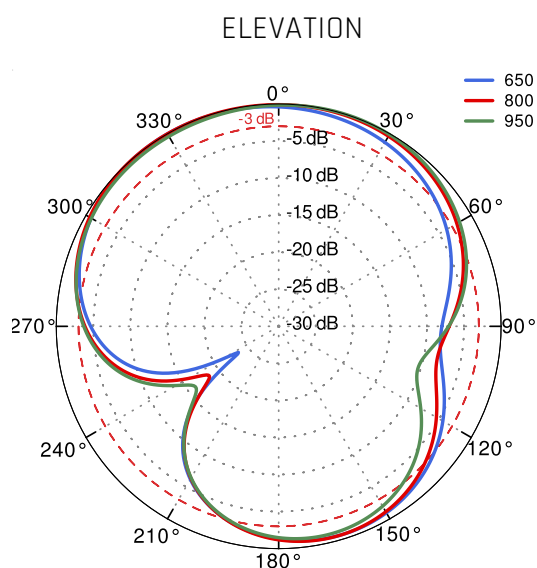



LTE from 1.71GHz to 2.5GHz

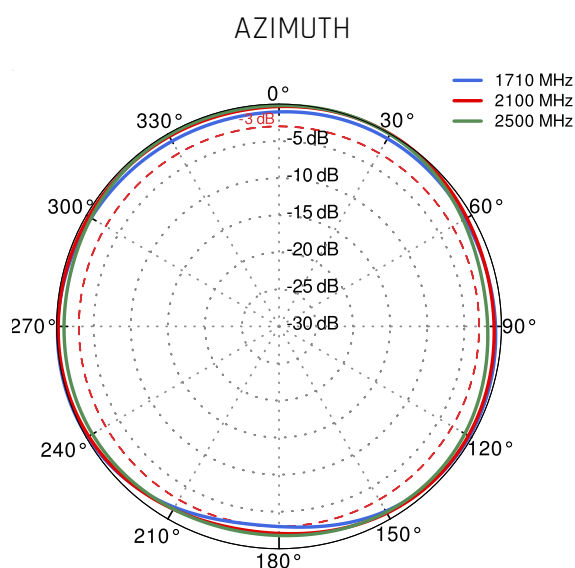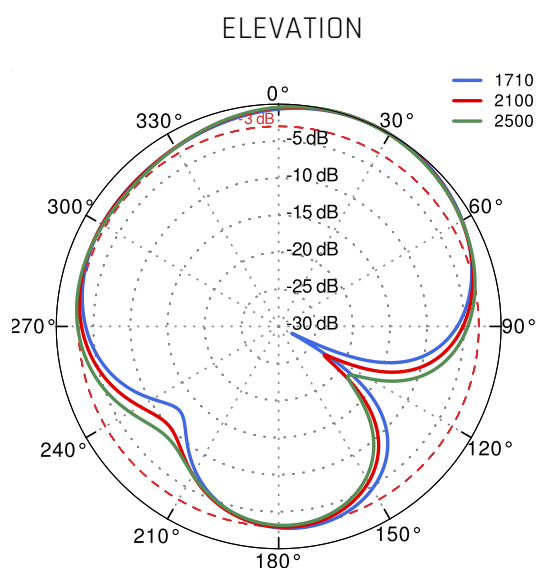

LTE from 3.3GHz to 4.0GHz

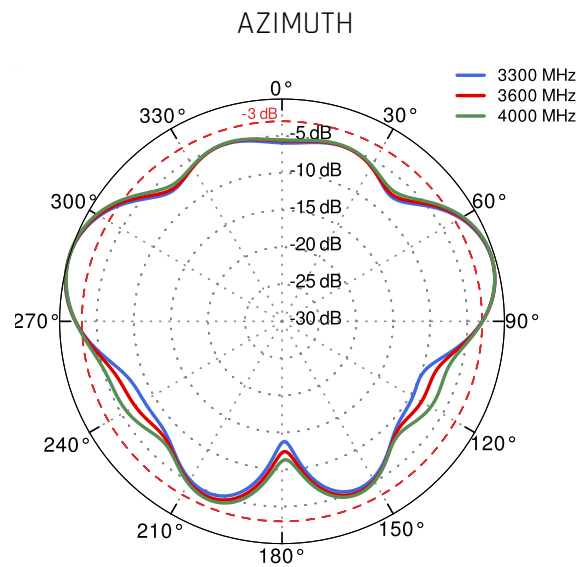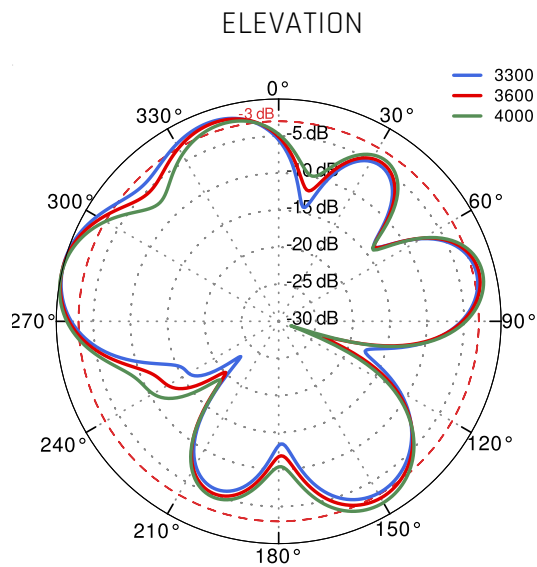

Wi-Fi 2.4GHz and 5GHz

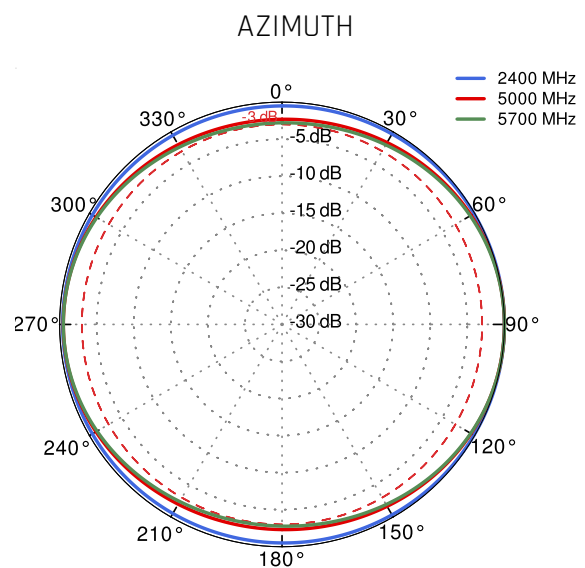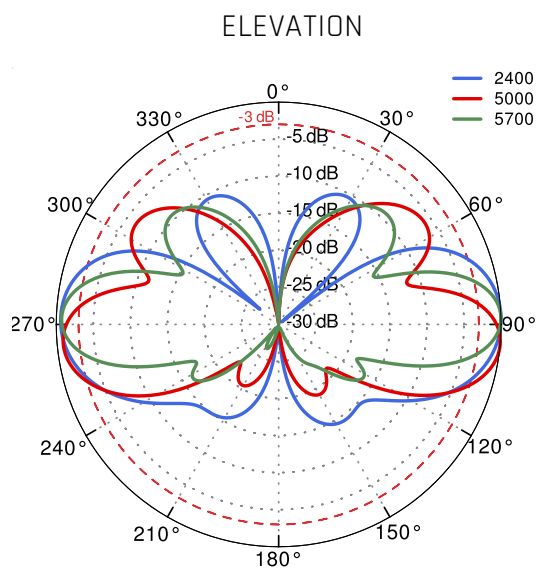

DIMENSIONS

