

QuCube for Teltonika RUTM20

INTEGRATED MULTI-BAND LTE & 5G OMNI ANTENNA + WI-FI ANTENNA + PLACE TO INSTALL TELTONIKA RUTM20 (ALL-IN-ONE)

QuCube for Teltonika RUTM20 is a revolutionary outdoor antenna solution that combines minimized dimensions with exceptional antenna performance. Designed specifically as an **antenna for Teltonika RUTM20** router, it is equipped with **two RJ45 sockets**: one **PoE input** for power supply and one **Active PoE output** for powering additional devices, such as CCTV, sensors, and IoT devices. This all-in-one unit integrates high-gain omnidirectional **5G and Wi-Fi antennas** with Teltonika routers into a compact, rugged **IP68-rated waterproof enclosure**. The integration reduces installation complexity while enabling rapid deployment of advanced outdoor 5G solutions. Engineered for outdoor and mobile applications, **QuCube** is ideal for use in transportation systems, for underground connectivity or urban and public installations. It ensures consistent performance wherever dependable connectivity is essential.




 OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP68

 ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER

 **ACTIVE POE** OUTPUT

 MADE IN **EUROPE**

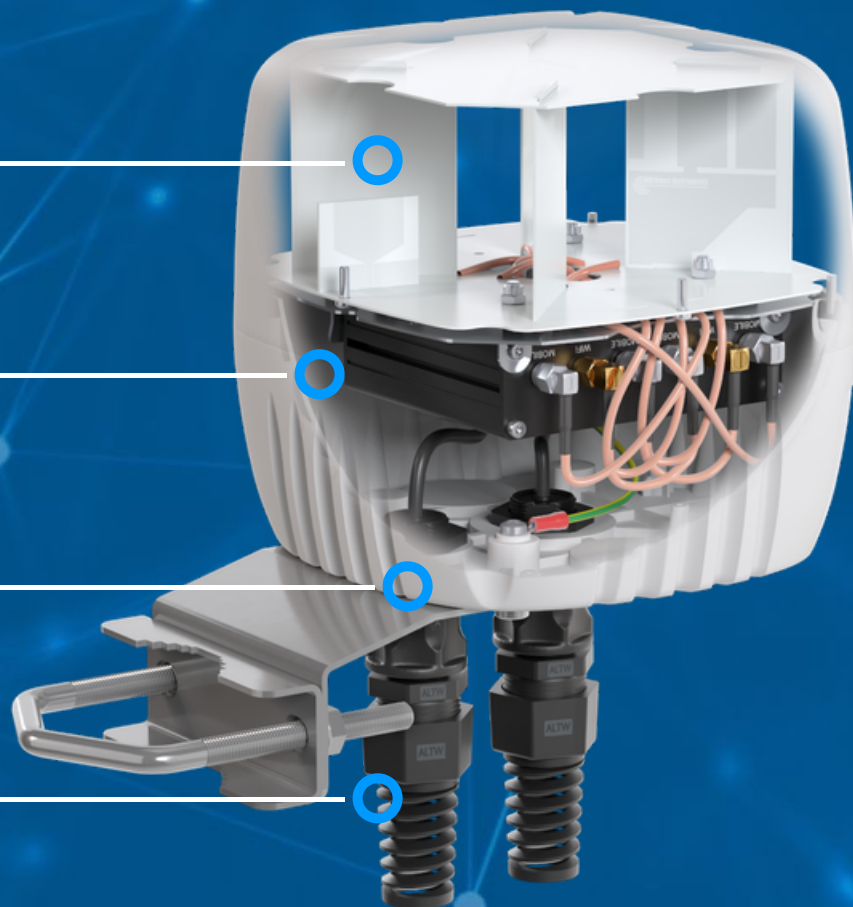

5G/LTE SPECIFICATION

FREQUENCY	0.58 - 2.0 GHz 2.0 - 3.5 GHz 3.5 - 5.0 GHz 5.0 - 6.35 GHz
MAX. GAIN	0.58 - 2.0 GHz : 2 dBi 2.0 - 3.5 GHz : 3.2 dBi 3.5 - 5.0 GHz : 3.1 dBi 5.0 - 6.35 GHz : 3.8 dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 65, 66, 67, 68, 69, 70, 71, 74, 75, 76, 85, 103, 106, 107, 111, 252, 253, 254, 255, 256
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n24, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n50, n51, n53, n54, n65, n66, n67, n68, n70, n71, n74, n75, n76, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n91, n92, n93, n94, n95, n97, n98, n99, n100, n101, n105, n106, n109, n110, n250, n251, n252, n253, n254, n255, n256
VSWR	<2.50, max <3.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5 - 7.2 GHz
MAX. GAIN	2.4 - 2.5 GHz: 2dBi 5 - 7.2 GHz: 5dBi
VSWR	< 2.50
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	2x QuRJ45
OUTER DIMENSIONS	160 x 160 x 155 mm 6.3 x 6.3 x 6.10 inch
WEIGHT	1.5 kg
OPERATING TEMPERATURE	-40°C to 80°C -40°F to 176°F
INGRESS PROTECTION	IP67 and IP68

POE POWER OPTIONS

POE IN: PASSIVE 44-50V

PoE OUT: 802.3at/802.3af

POE IN: ACTIVE 802.3AT

PoE OUT: 802.3af

MOUNTING KIT

MATERIAL

Galvanized steel

WEIGHT

0.4kg

MOUNTING PLACE


Wall or mast

MAST DIAMETER


25-66 mm
0.98-2.60 inch

PLOTS


5G/LTE VSWR

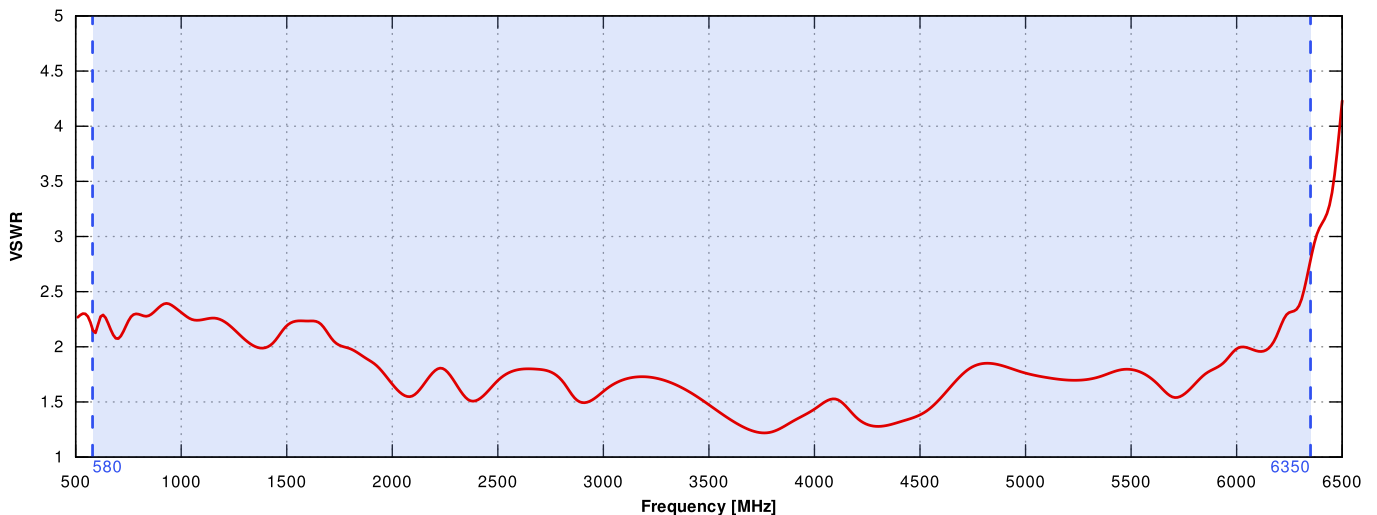


5G/LTE GAIN

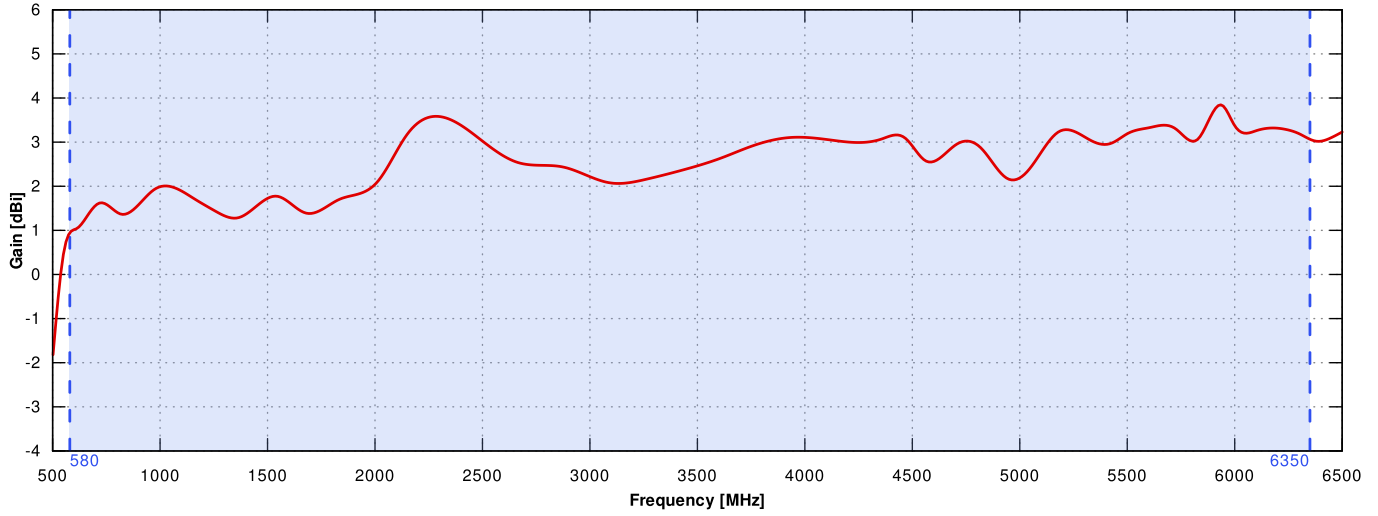

Wi-Fi - V VSWR

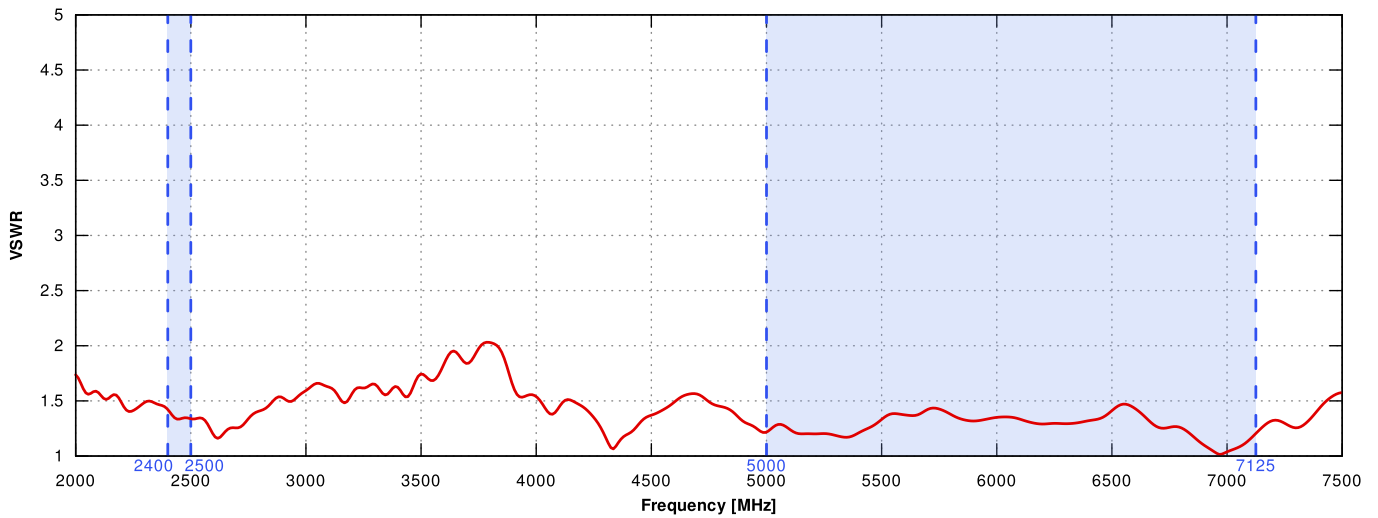

Wi-Fi - V Gain

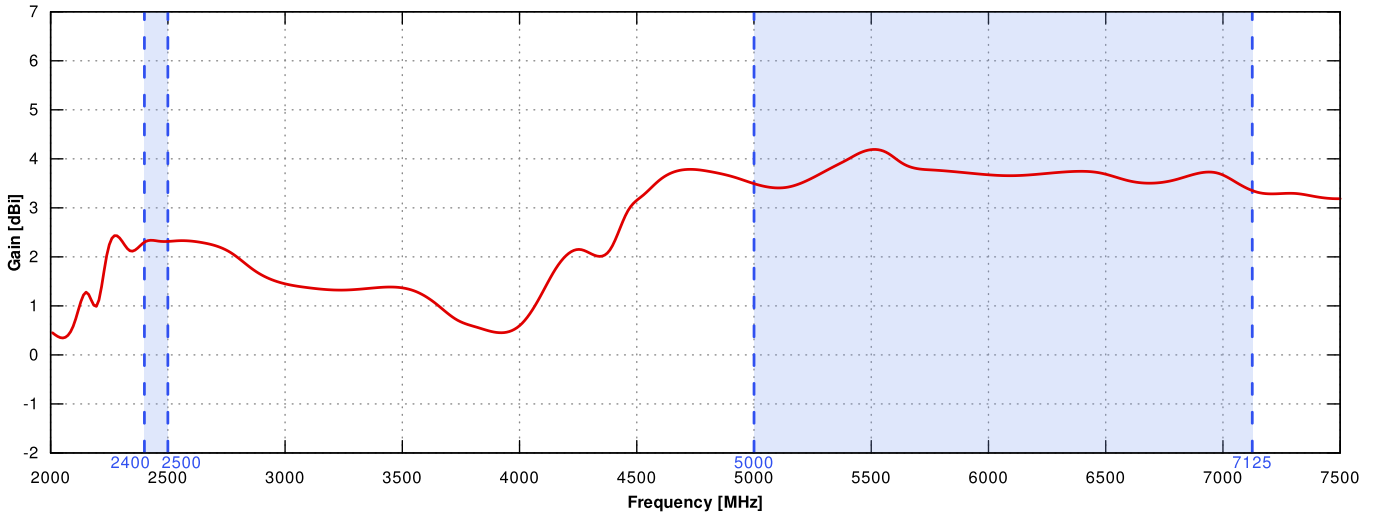


5G/LTE from 617MHz to 960MHz




5G/LTE from 1.71GHz to 2.7GHz




5G/LTE from 3.3GHz to 4.2GHz

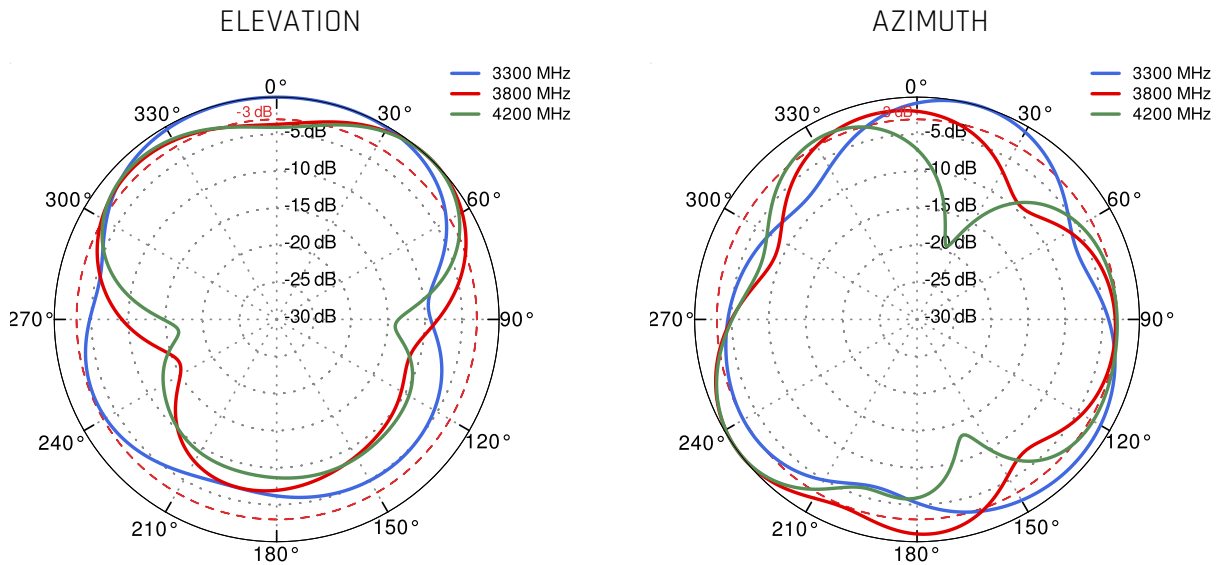

5G/LTE from 4.8GHz to 5.8GHz

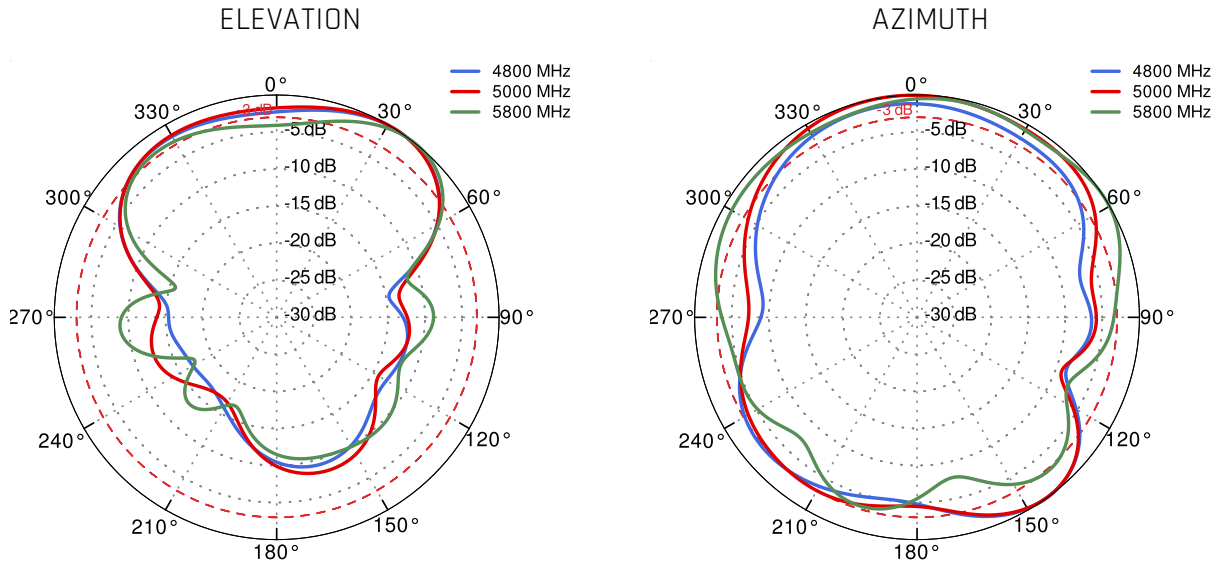

Wi-Fi V From 2.4 GHz to 6.5 GHz

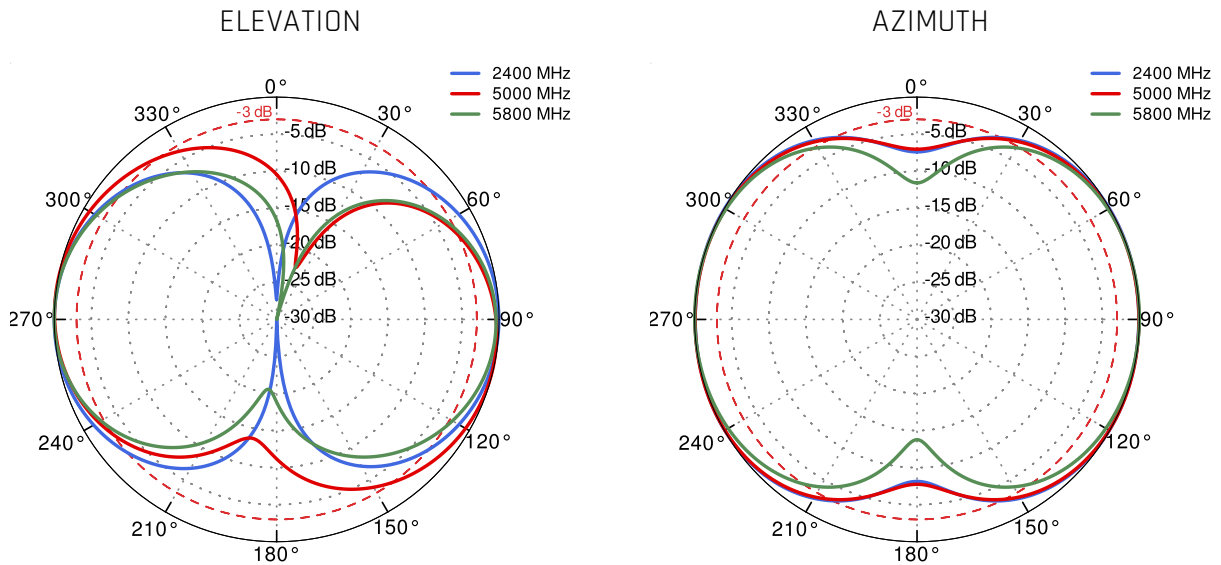

DIMENSIONS

