
QuMax for TRB140 with housing

Integrated outdoor multi band high power LTE directional antenna + place to install Teltonika TRB140 (All-in-one)

QuMax offers the most powerful directional LTE antenna of all QuWireless antennas. It is dedicated to connections with long distance to base station. It is designed to have Teltonika **TRB140 with housing** router installed inside IP67 enclosure. It is the first choice for fixed installations in industrial environment.
This antenna is also compatible with TRB141, TRB142, TRB143 and TRB145.

4G LTE | 694-2700MHz | 6 dBi | DIRECTIONAL | IP 67 | -40° TO +80°

- ALL ANTENNAS AND TELTONIKA ROUTER INTEGRATED **IN ONE ENCLOSURE**
- OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP67
- ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER
- MADE IN **EUROPE**

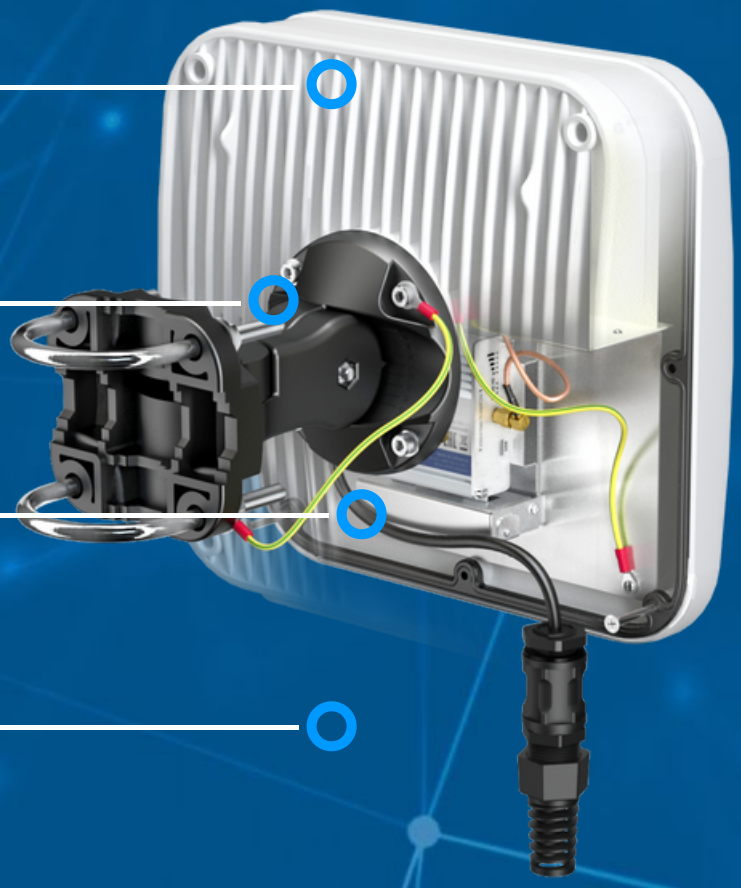

LTE ANTENNA SPECIFICATION

FREQUENCY	0.694 - 0.96 GHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n86, n89, n90, n95, n97, n98, n100, n101, n256
GAIN	0.694 - 0.96 GHz : 4 dBi 1.7 - 2.2 GHz : 5 dBi 2.2 - 2.7 GHz : 6 dBi
FRONT-TO-BACK	>8 dB
VSWR	<1.30, max <1.80
BEAMWIDTH	90°/90° ±30°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.


MECHANICAL SPECIFICATION

RADOME MATERIAL	UV-resistant ASA
OPERATING HUMIDITY	up to 100% RH
MATERIALS	aluminum, PTFE, Fiberglass
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.6 - 0.8 Nm
MAST DIAMETER	25-66mm 0.98-2.60 inch


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PLOTS

VSWR

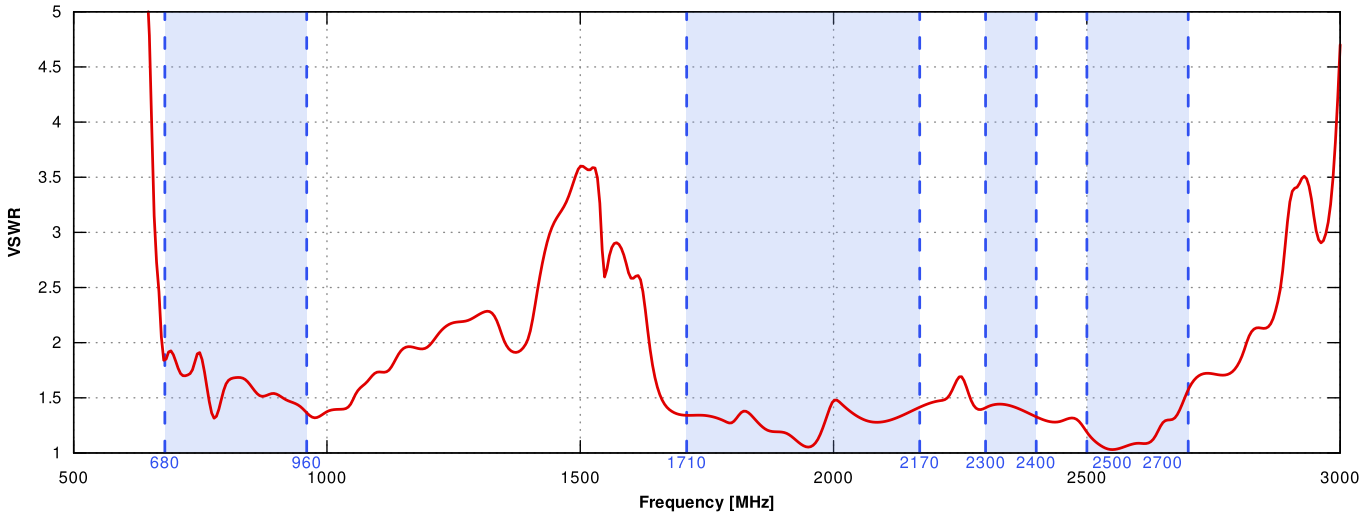


GAIN

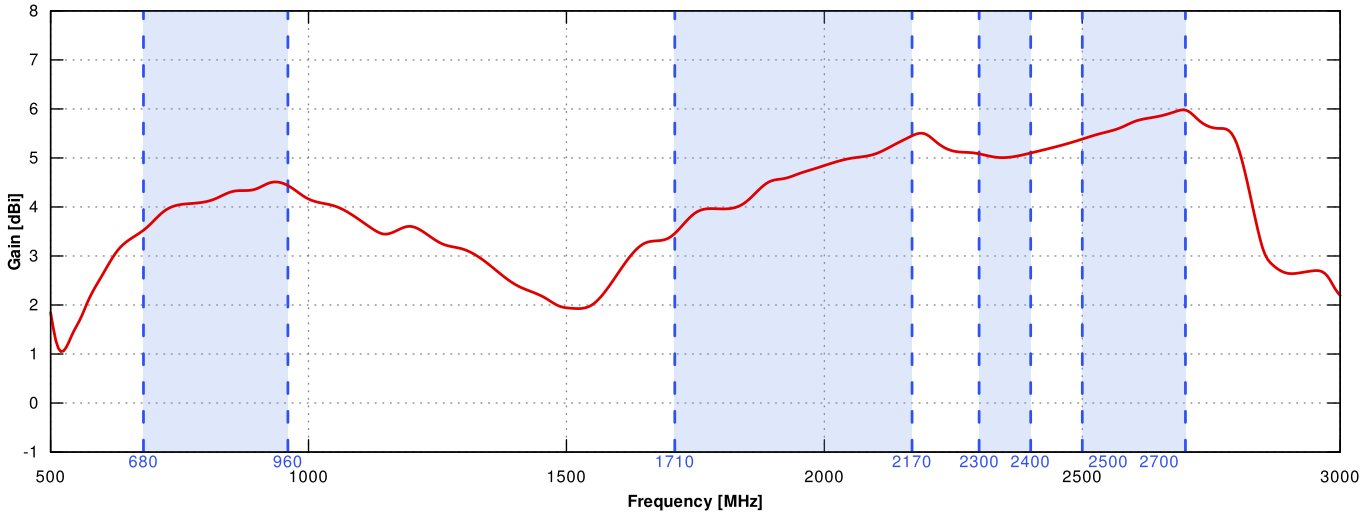


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

From 700MHz to 900MHz

ELEVATION

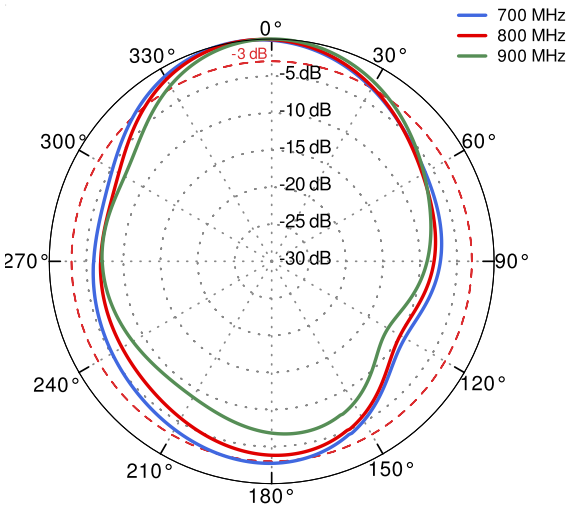


AZIMUTH

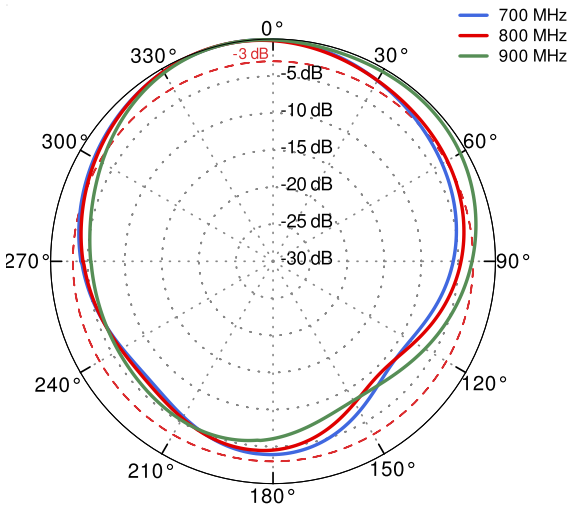


From 1.71GHz to 2.17GHz

ELEVATION

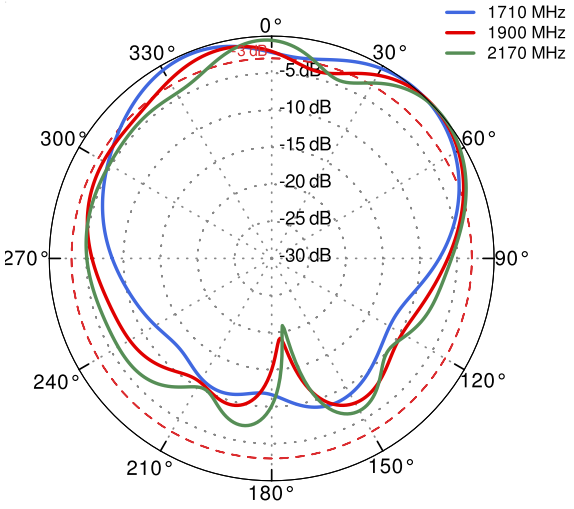


AZIMUTH

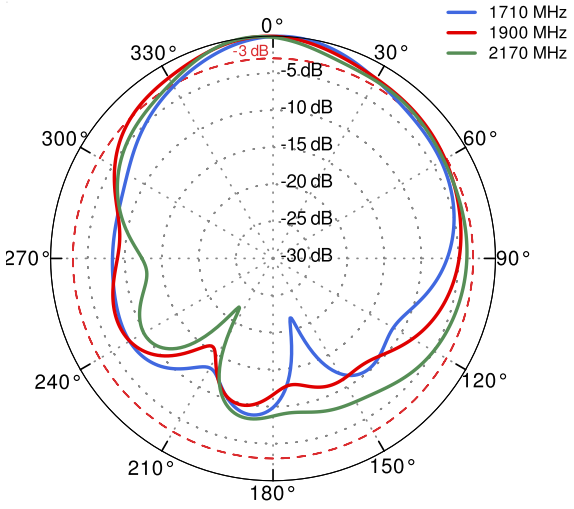


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

From 2.3GHz to 2.7GHz


ELEVATION

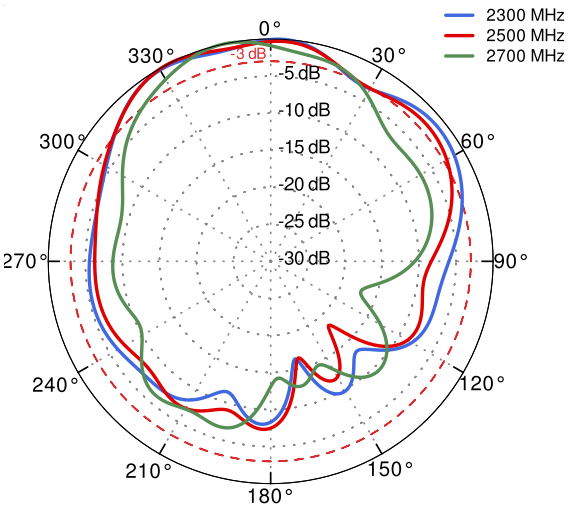


AZIMUTH

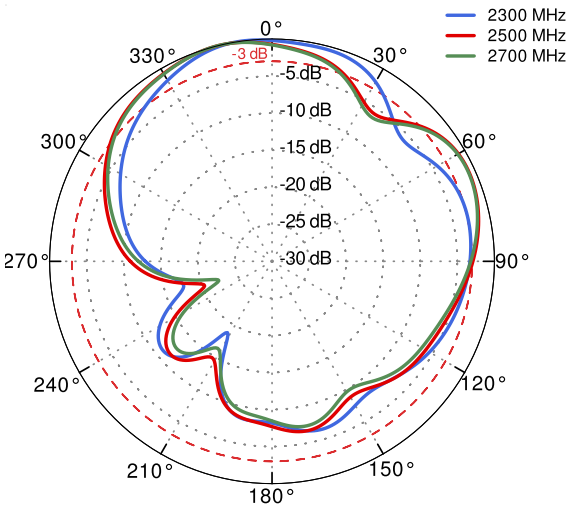


DIMENSIONS

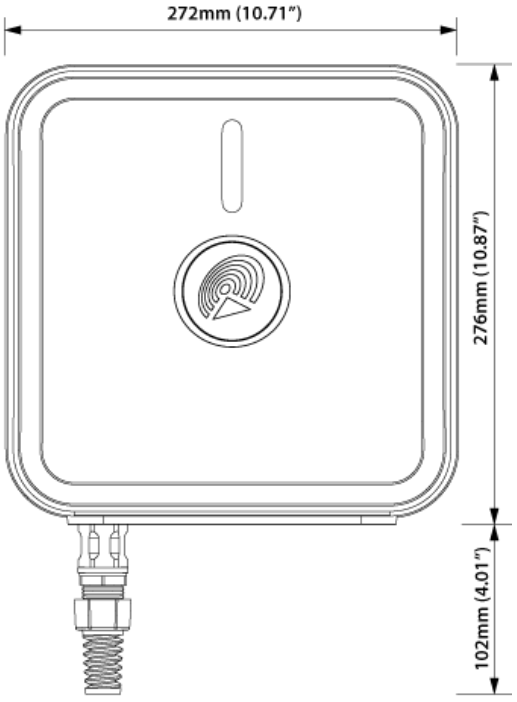

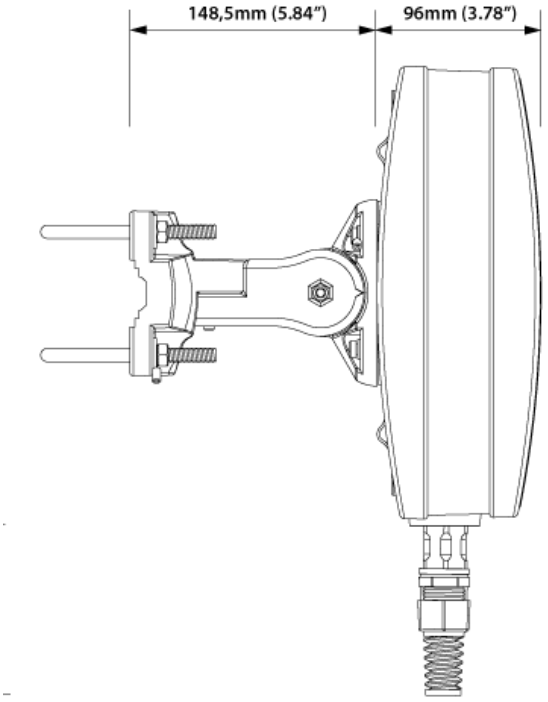

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

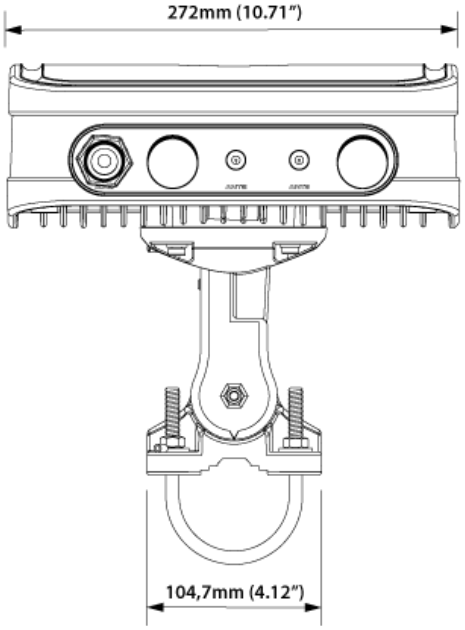

WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com **Tel:** +48 513 900 416

Support email: support@quwireless.com **Website:** www.quwireless.com

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.