

# QuMax Omni for Cradlepoint R920

**INTEGRATED MULTI-BAND 5G OMNI ANTENNA + WIFI OMNI ANTENNA + BLUETOOTH ANTENNA + GPS ANTENNA + PLACE TO INSTALL CRADLEPOINT R920 (ALL-IN-ONE)**

QuMax Omni all-in-one antenna for Cradlepoint R920 router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni 2\*5G, 2\*Wi-Fi, Bluetooth and GPS antenna. If you use R920 with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.

Wi-Fi 6E support!



OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67




ANTENNA PERFECTLY MATCHED WITH THE CRADLEPOINT R920



ALL ANTENNAS AND CRADLEPOINT ROUTER INTEGRATED IN ONE ENCLOSURE



MADE IN EUROPE

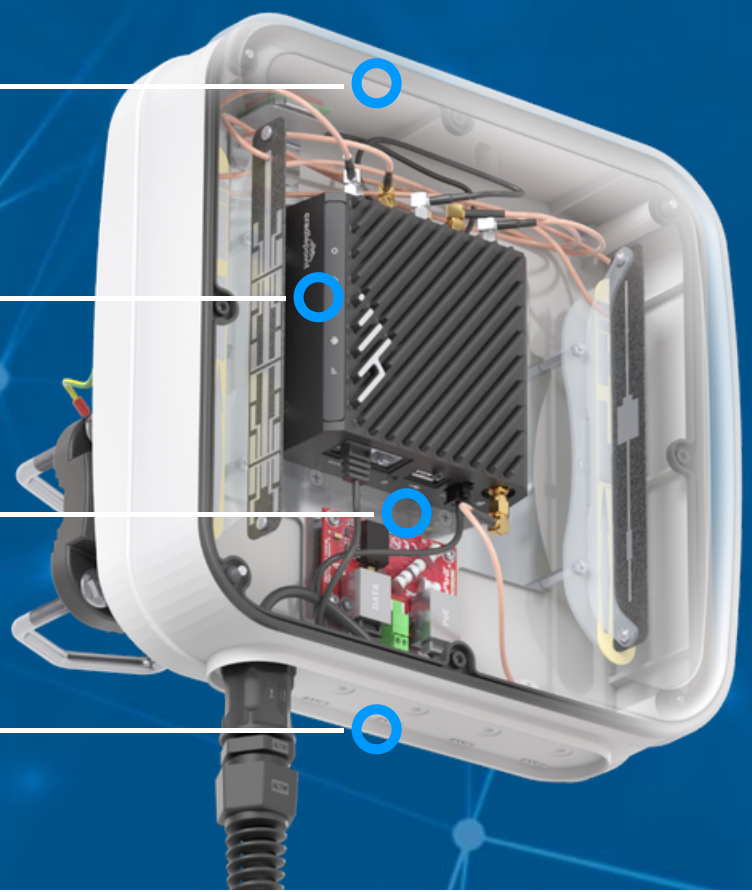

## 5G / LTE SPECIFICATION

<b>FREQUENCY</b>	0.6 - 1.4 GHz 1.5 - 3.0 GHz 3.0 - 5.0 GHz 5.0 - 6.35 GHz
<b>MAX. GAIN</b>	0.6 - 1.4 GHz : 2.6 dBi 1.5 - 3.0 GHz : 4.2 dBi 3.0 - 5.0 GHz : 4.4 dBi 5.0 - 6.35 GHz : 2.1 dBi
<b>SUPPORTED LTE BANDS</b>	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 23, 24, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 54, 65, 66, 67, 68, 69, 70, 71, 85, 103, 106, 107, 111, 252, 253, 254, 255, 256
<b>SUPPORTED 5G BANDS</b>	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n24, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n54, n65, n66, n67, n68, n70, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n99, n100, n101, n105, n106, n250, n251, n252, n253, n254, n255, n256
<b>VSWR</b>	<2.00, max <3.00
<b>BEAMWIDTH</b>	360°/35° +/- 5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω
<b>CONNECTOR</b>	2x SMA
<b>CABLE TYPE</b>	RG316

## **WI-FI SPECIFICATION**

<b>FREQUENCY</b>	2.4 - 2.5 GHz 5.0 - 7.2 GHz
<b>MAX. GAIN</b>	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
<b>VSWR</b>	<1.50, max <2.00
<b>BEAMWIDTH</b>	360°/25° +/- 5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 $\Omega$
<b>CONNECTOR</b>	2x RPSMA
<b>CABLE TYPE</b>	RG316

## **GPS ACTIVE ANTENNA SPECIFICATION**

<b>FREQUENCY</b>	1.56 - 1.61 GHz
<b>VSWR</b>	< 2
<b>GAIN</b>	3 dBi
<b>GAIN 3V</b>	28 dBi
<b>DC POWER INPUT</b>	2.5 V ~ 6.5 V
<b>POWER CONSUMPTION</b>	2.5-6.5mA
<b>IMPEDANCE</b>	50 $\Omega$

**POLARIZATION**

RHCP (right hand circularly polarized)

**CONNECTOR**

1x SMA

**CABLE TYPE**

RG174

 **MECHANICAL SPECIFICATION****MATERIAL**

BS, aluminum, PTFE, Fiberglass

**INGRESS PROTECTION**

IP67

**CONNECTOR TYPE**

RJ45

**DIMENSIONS**272 x 276 x 96 mm  
10.71 x 10.87 x 3.78 inch**WEIGHT**1.8 kg  
3.97 lbs**OPERATING TEMPERATURE**From -40°C to 75°C  
From -40°F to 167°F**ENCLOSURE RECOMMENDED  
TIGHTENING TORQUE**

0.6 - 0.8 Nm

## MOUNTING KIT

### DIMENSIONS

9.9 x 10.5 x 14.8 cm  
3.9 x 4.13 x 5.83 inch

### REGULATION RANGE

+/- 30°

### MAST DIAMETER RANGE

25 - 66mm  
0.98-2.60 inch

### MATERIAL

Polyamide with fiberglass + galvanized steel U-Bolts

### WEIGHT


0.87kg

### MOUNTING PLACE


Wall or mast or ceiling

## PLOTS


### 5G/LTE VSWR

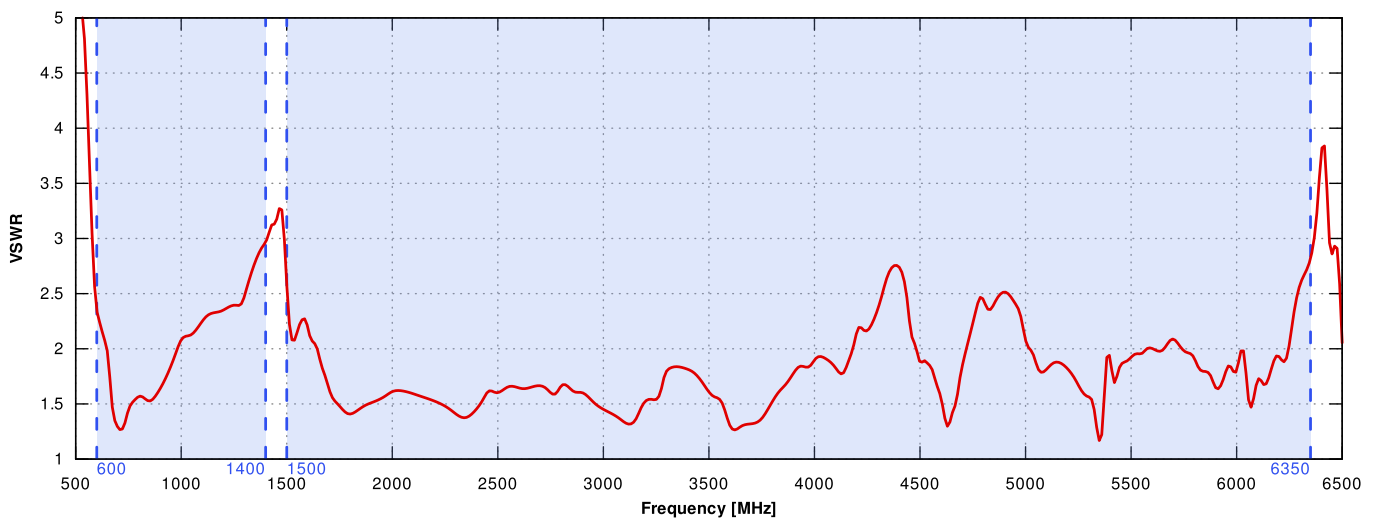


### WI-FI VSWR

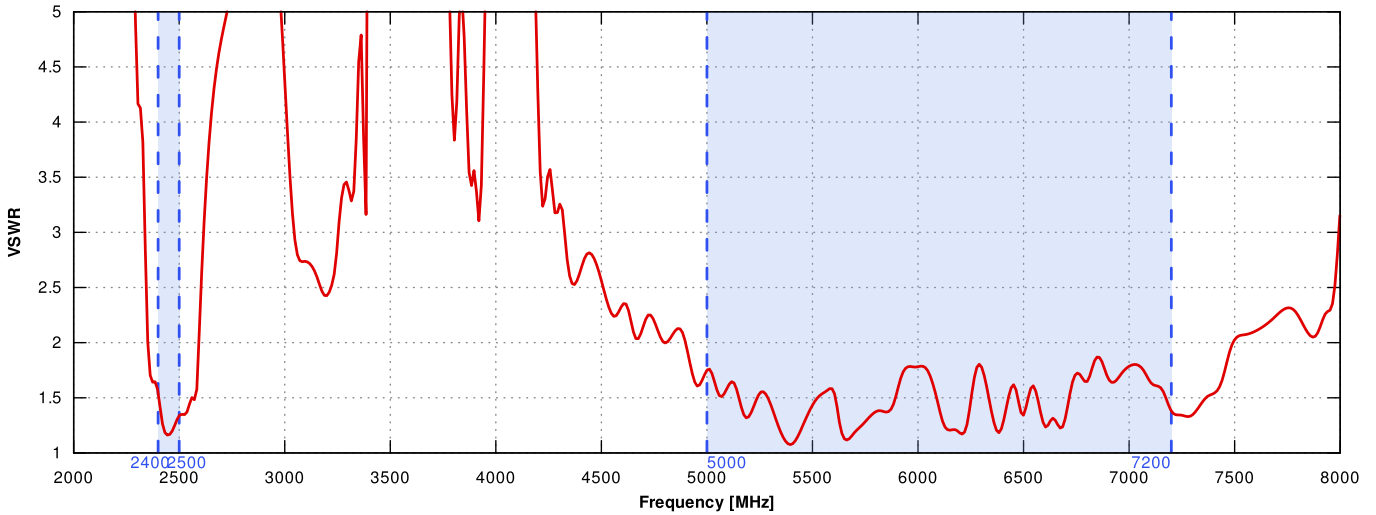


### 5G/LTE Gain

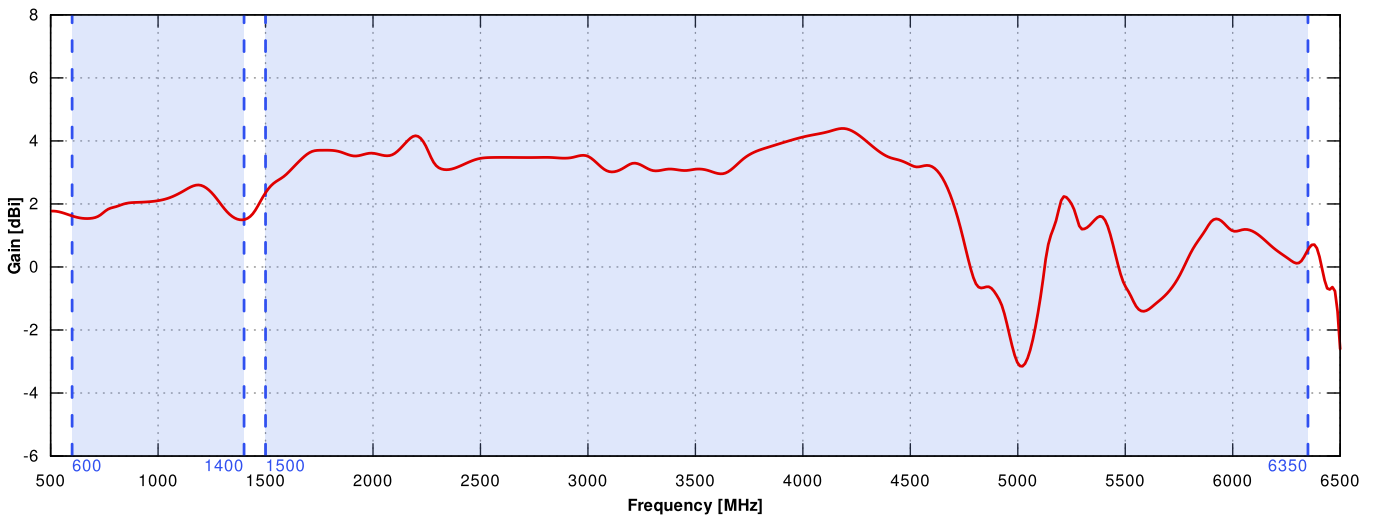


Wi-Fi Gain

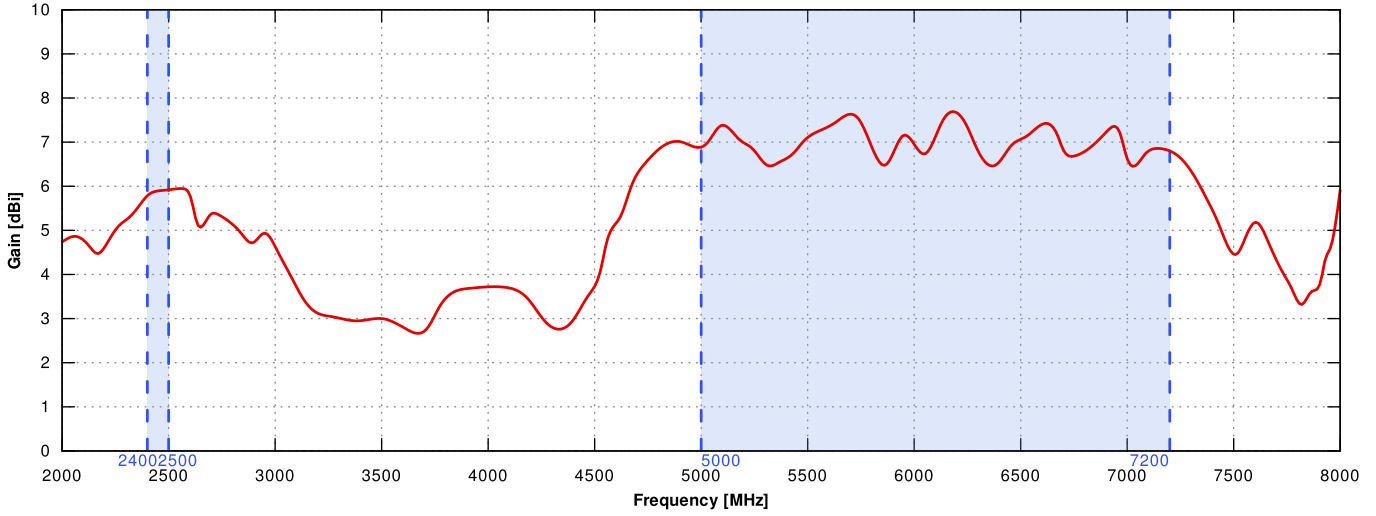


5G/LTE from 650MHz to 950MHz

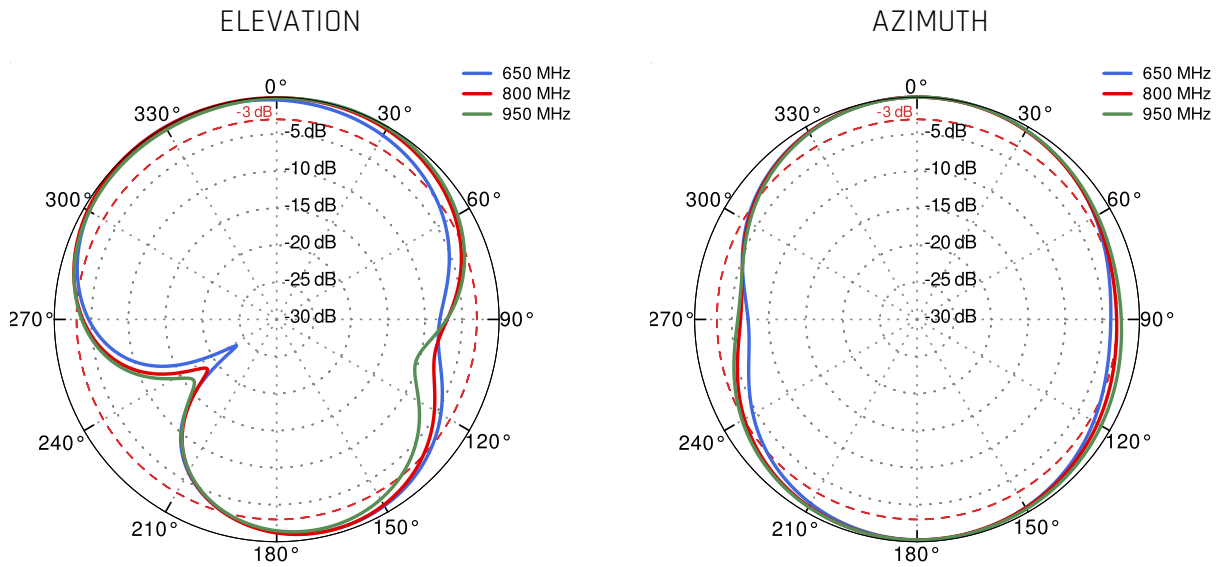


5G/LTE from 1.71GHz to 2.5GHz

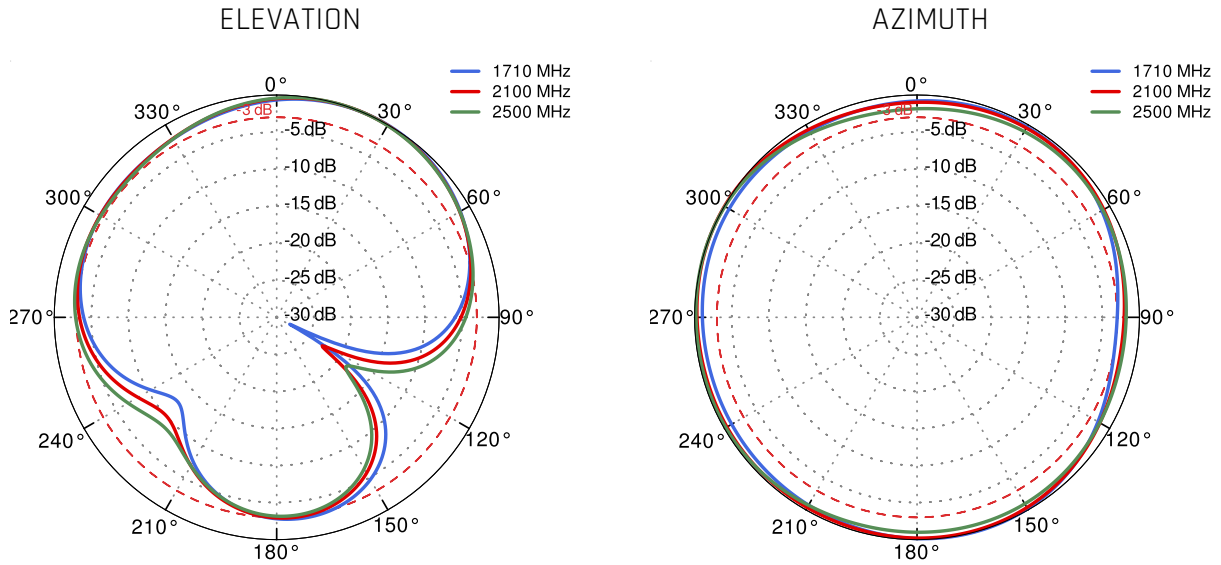


5G/LTE from 3.3GHz to 4.0GHz

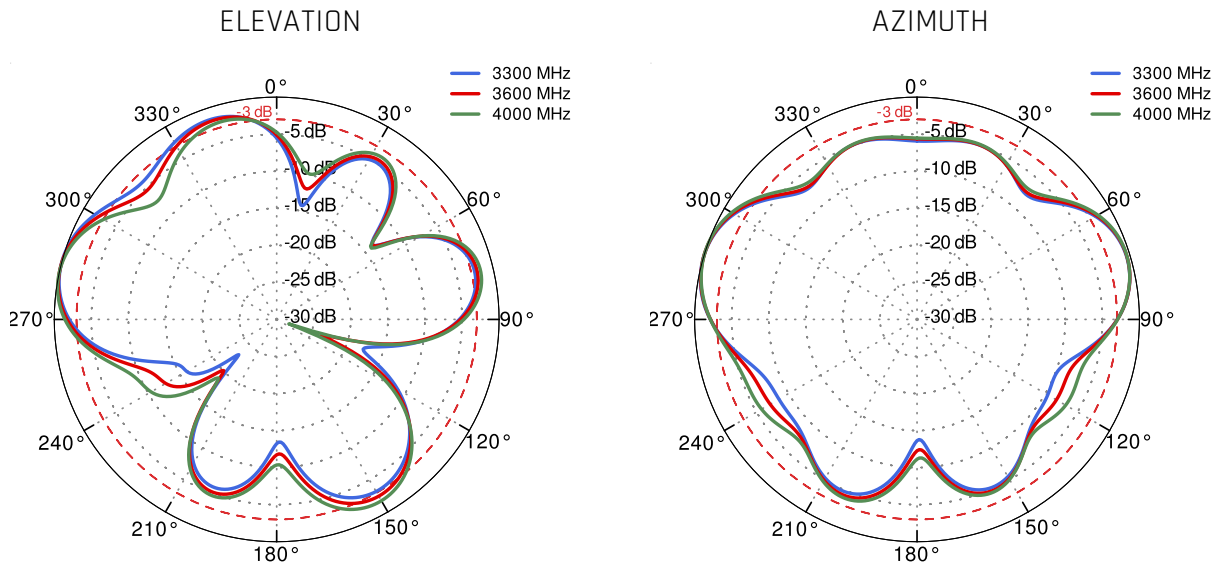

5G/LTE from 4.5GHz to 5.5GHz

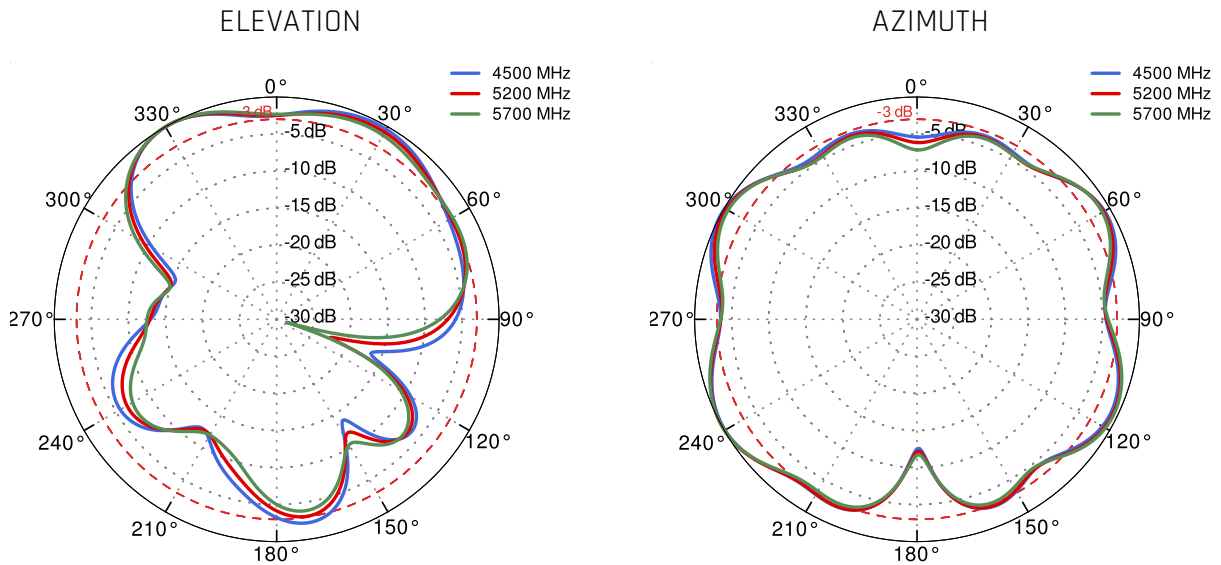

Wi-Fi 2.4GHz and 5GHz and 6GHz

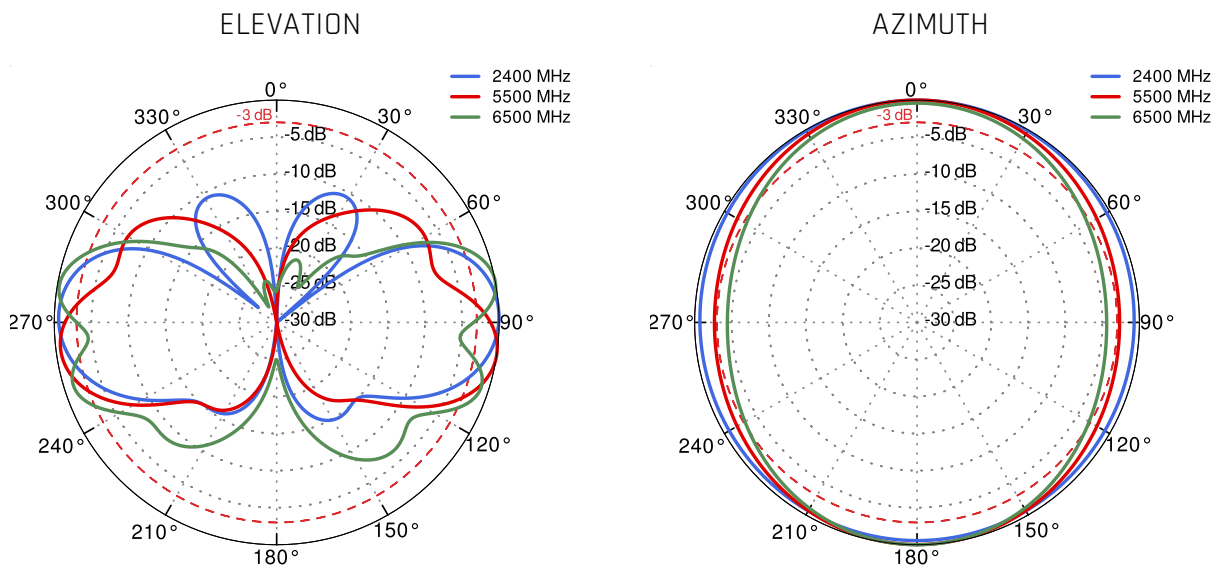

## **DIMENSIONS**

