


# QuMax Omni for DIGI IX40

## INTEGRATED MULTI-BAND 5G OMNI ANTENNA + GPS ANTENNA + PASSIVE POE SPLITTER + PLACE TO INSTALL DIGI IX40 (ALL-IN-ONE)

QuMax Omni all-in-one antenna for DIGI IX40 router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni 5G and GPS antenna. If you use IX40 with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.

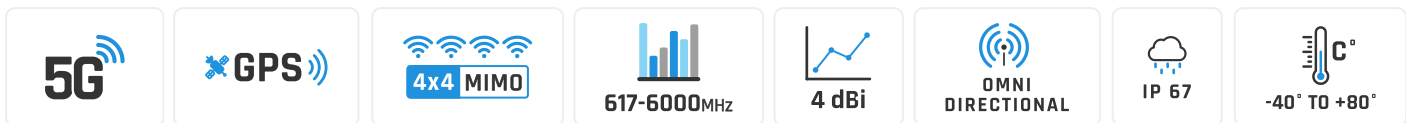

OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67




ANTENNA PERFECTLY MATCHED WITH THE DIGI IX40



ALL ANTENNAS AND DIGI ROUTER INTEGRATED IN ONE ENCLOSURE



MADE IN EUROPE

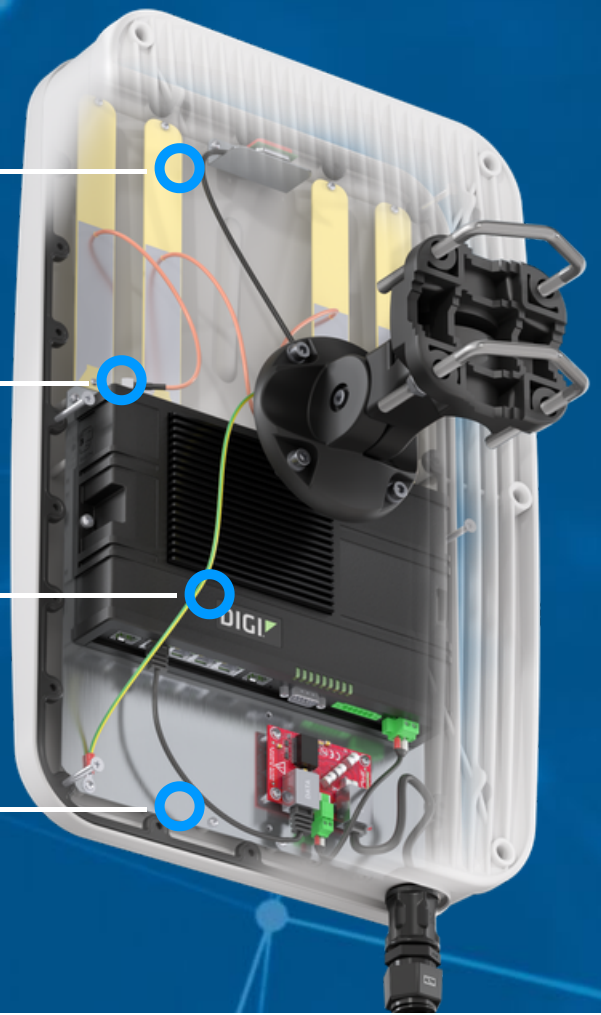

## 5G/LTE SPECIFICATION

<b>FREQUENCY</b>	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
<b>SUPPORTED LTE BANDS</b>	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
<b>SUPPORTED 5G BANDS</b>	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
<b>GAIN</b>	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 GHz : 2.5dBi
<b>VSWR</b>	<1.80, max <2.00
<b>BEAMWIDTH</b>	360°/35° ±5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## MECHANICAL SPECIFICATION


<b>MATERIAL</b>	BS, aluminum, PTFE, Fiberglass
<b>INGRESS PROTECTION</b>	IP67
<b>CONNECTOR TYPE</b>	RJ45
<b>DIMENSIONS</b>	486.0 x 292.2 x 105.6 mm 19.13 x 11.50 x 4.16 inch
<b>WEIGHT</b>	2.5 kg 5.51 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 75°C From -40°F to 167°F
<b>ENCLOSURE RECOMMENDED TIGHTENING TORQUE</b>	0.6 - 0.8 Nm

## MOUNTING KIT


<b>DIMENSIONS</b>	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
<b>REGULATION RANGE</b>	+/- 30°
<b>MAST DIAMETER RANGE</b>	25 - 66mm 0.98-2.60 inch
<b>MATERIAL</b>	Polyamide with fiberglass + galvanized steel U-Bolts
<b>WEIGHT</b>	0.87kg
<b>MOUNTING PLACE</b>	Wall or mast or ceiling

## PLOTS


VSWR for 5G/LTE antenna

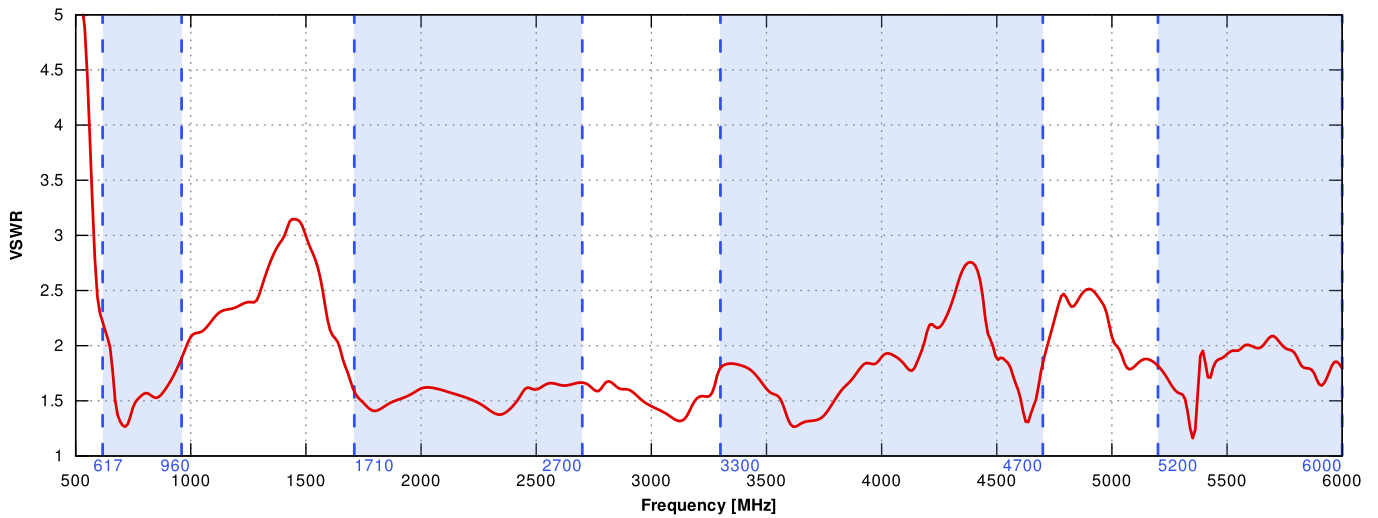


Gain for 5G/LTE antenna


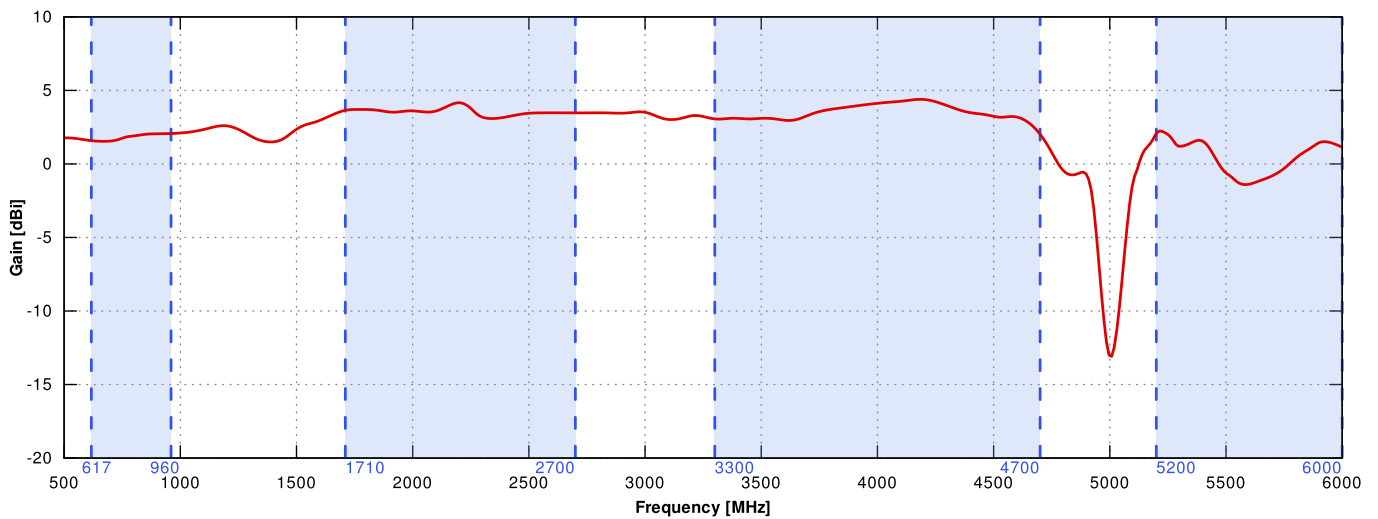


### 5G/LTE from 650MHz to 950MHz

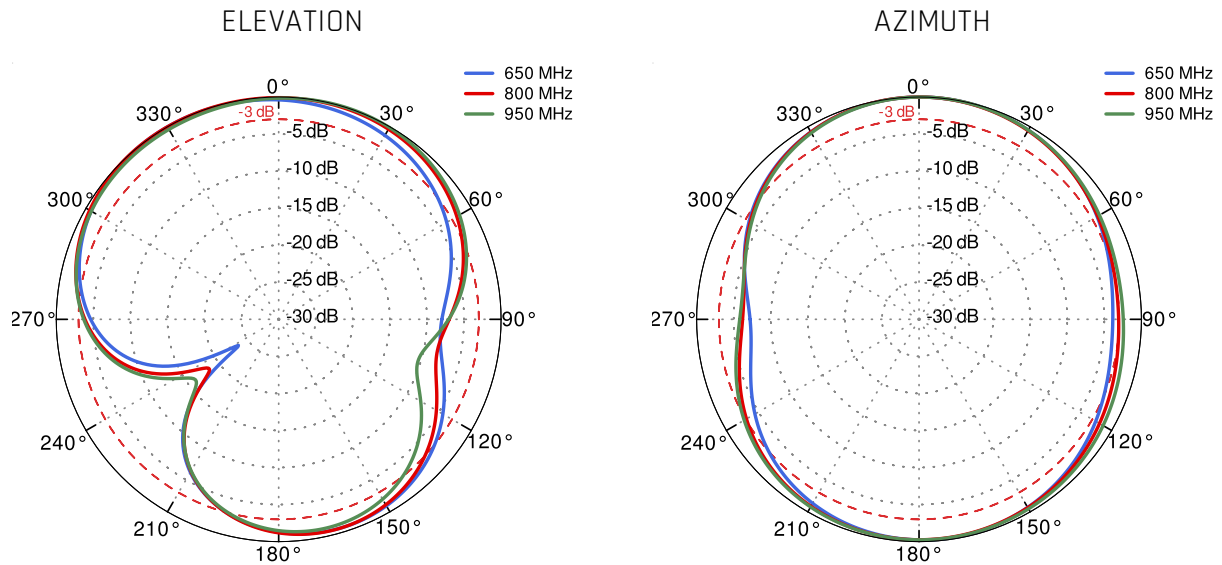

### 5G/LTE from 1.71GHz to 2.5GHz

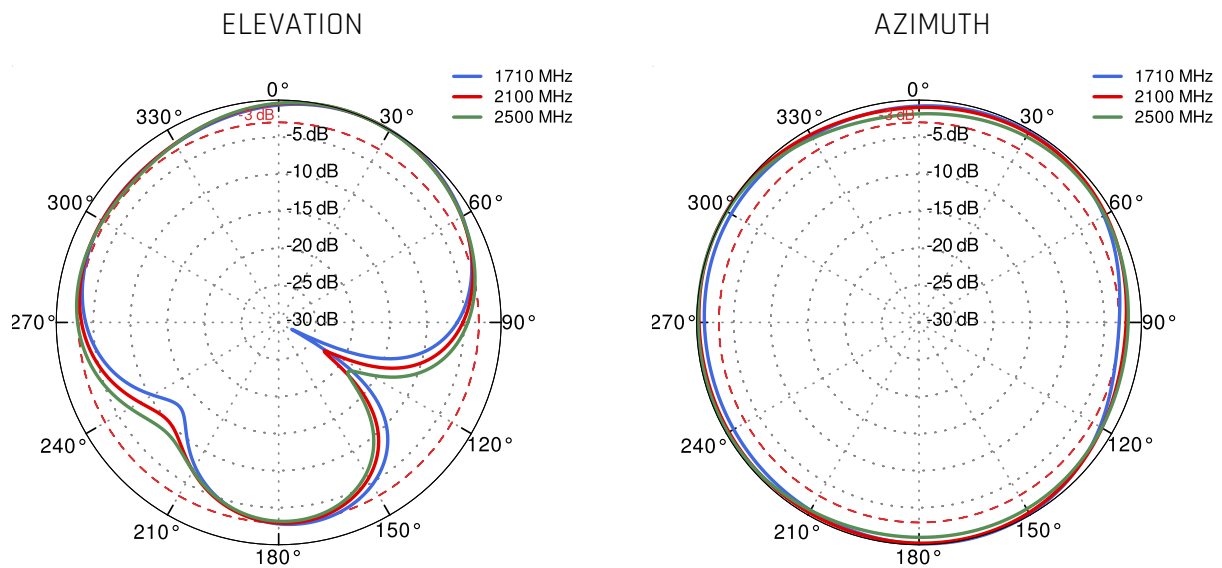

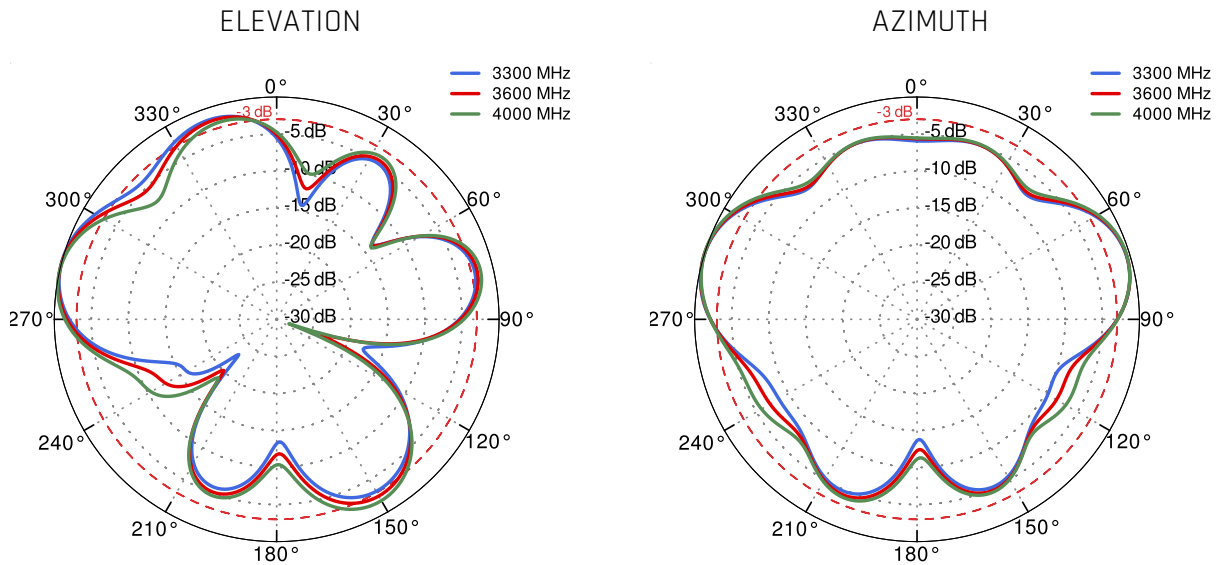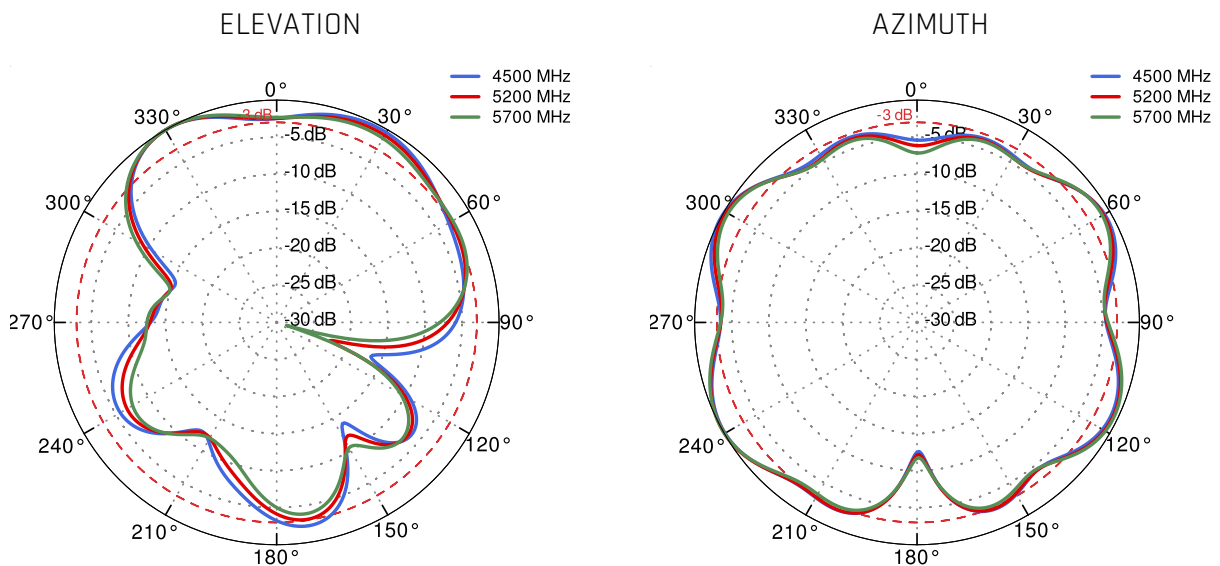**5G/LTE from 3.3GHz to 4.0GHz**

**5G/LTE from 4.5 GHz to 5.5 GHz**


## **DIMENSIONS**

