

# QuMax Omni for Peplink MAX BR1 Mini Core (HW3)

## INTEGRATED MULTI-BAND 5G OMNI ANTENNA + PASSIVE POE SPLITTER + PLACE TO INSTALL PEPLINK MAX BR1 MINI CORE (HW3) (ALL-IN-ONE)

QuMax Omni all-in-one antenna for Peplink MAX BR1 Mini Core (HW3) router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni 5G antenna. If you use MAX BR1 Mini Core (HW3) with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.



OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67




ANTENNA PERFECTLY MATCHED WITH THE ROBUSTEL EG5120



ALL ANTENNAS AND ROBUSTEL ROUTER INTEGRATED IN ONE ENCLOSURE



MADE IN EUROPE

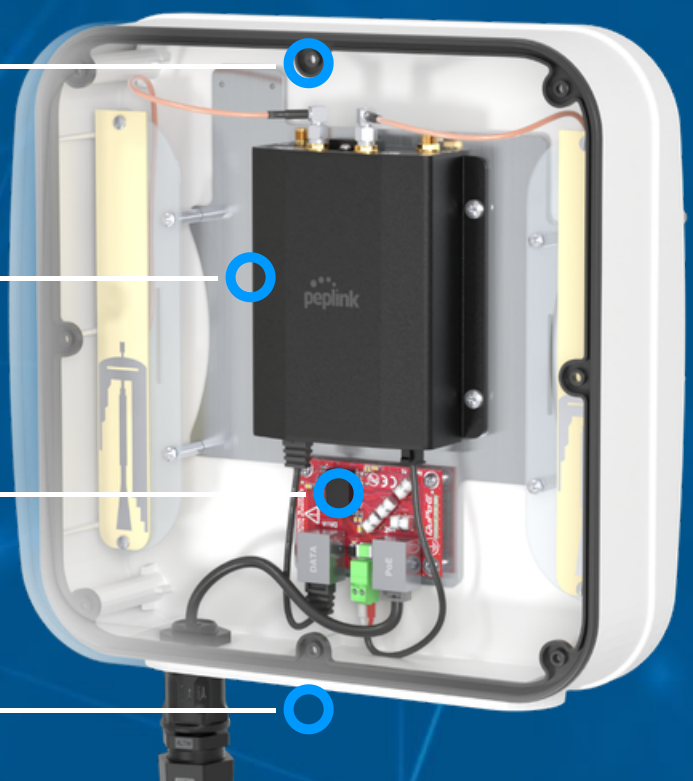

## 5G / LTE SPECIFICATION

<b>FREQUENCY</b>	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
<b>GAIN</b>	617 - 960 MHz : 3 dBi 1.7 - 2.7 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 : 2.5dBi
<b>SUPPORTED LTE BANDS</b>	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
<b>SUPPORTED 5G BANDS</b>	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
<b>VSWR</b>	<1.80, max <2.00
<b>BEAMWIDTH</b>	360°/35° +/- 5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## WI-FI SPECIFICATION

<b>FREQUENCY</b>	2.4 - 2.5 GHz 5.0 - 6.0 GHz
<b>GAIN</b>	2.4 - 2.5 GHz: 6 dBi 4.7 - 6 GHz : 7 dBi
<b>VSWR</b>	<1.70, max <2.00
<b>BEAMWIDTH</b>	360°/25° +/- 5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## MECHANICAL SPECIFICATION

<b>MATERIAL</b>	BS, aluminum, PTFE, Fiberglass
<b>INGRESS PROTECTION</b>	IP67
<b>CONNECTOR TYPE</b>	RJ45
<b>DIMENSIONS</b>	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
<b>WEIGHT</b>	1.8 kg 3.97 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 75°C From -40°F to 167°F
<b>ENCLOSURE RECOMMENDED TIGHTENING TORQUE</b>	0.6 - 0.8 Nm

## MOUNTING KIT

### DIMENSIONS

9.9 x 10.5 x 14.8 cm  
3.9 x 4.13 x 5.83 inch

### REGULATION RANGE

+/- 30°

### MAST DIAMETER RANGE

25 - 66mm  
0.98-2.60 inch

### MATERIAL

Polyamide with fiberglass + galvanized steel U-Bolts

### WEIGHT


0.87kg

### MOUNTING PLACE


Wall or mast or ceiling

## PLOTS


### 5G/LTE VSWR

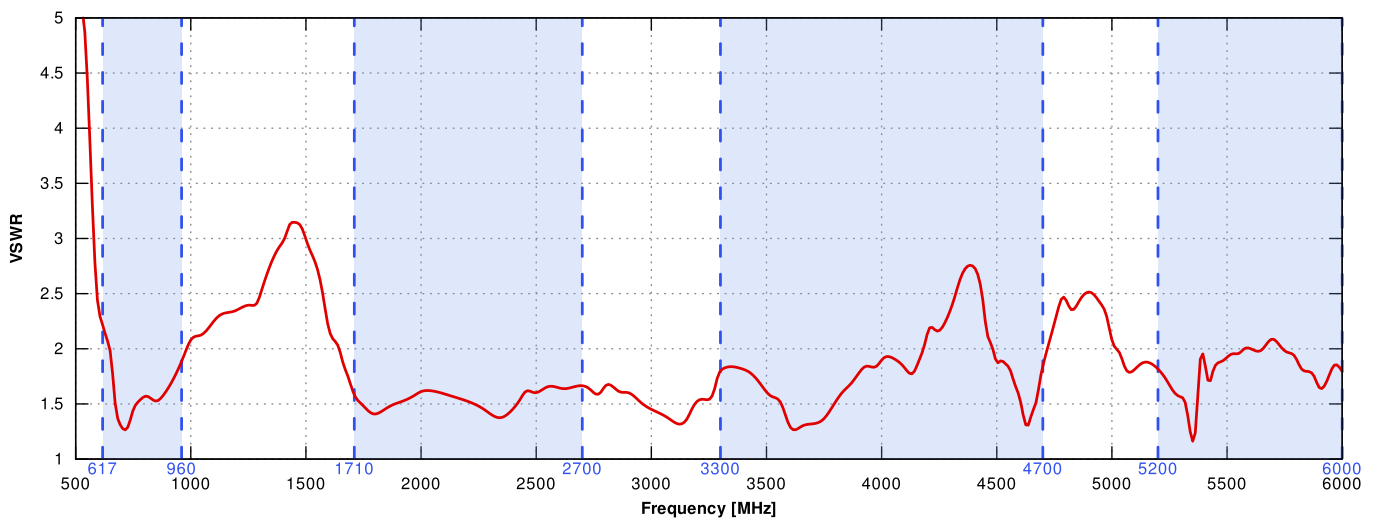


## WI-FI VSWR

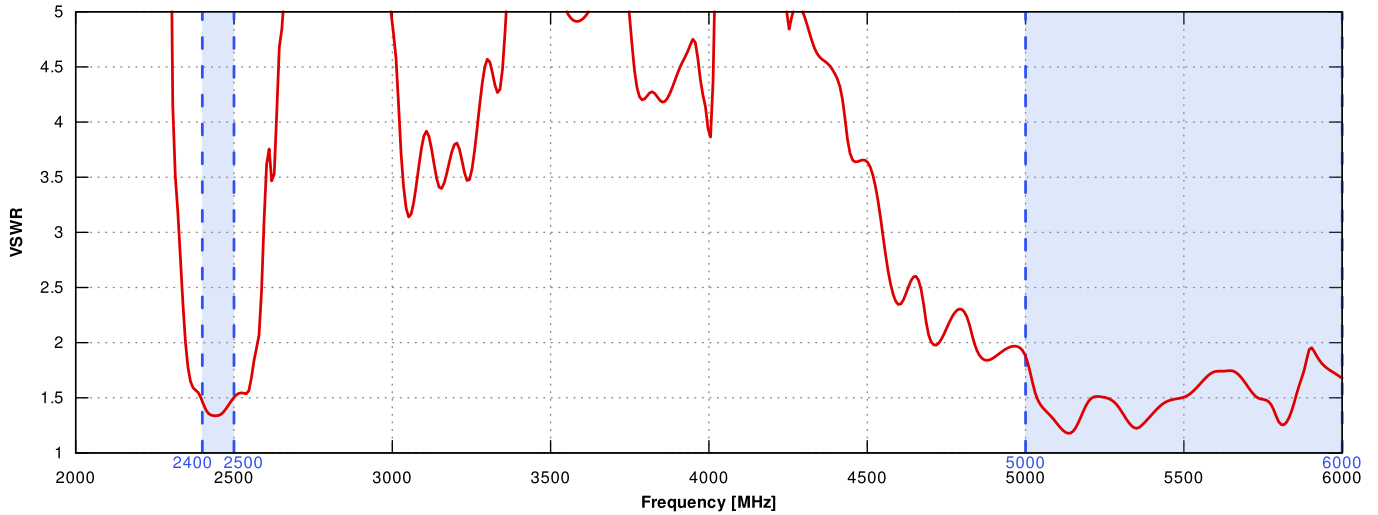


## 5G/LTE Gain

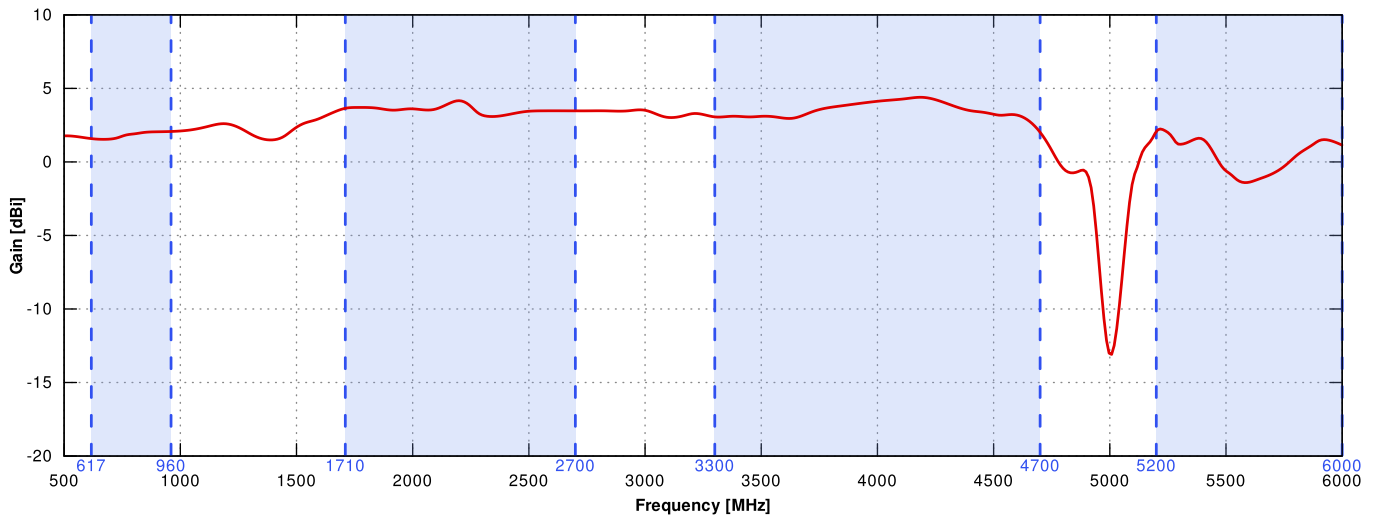



Wi-Fi Gain

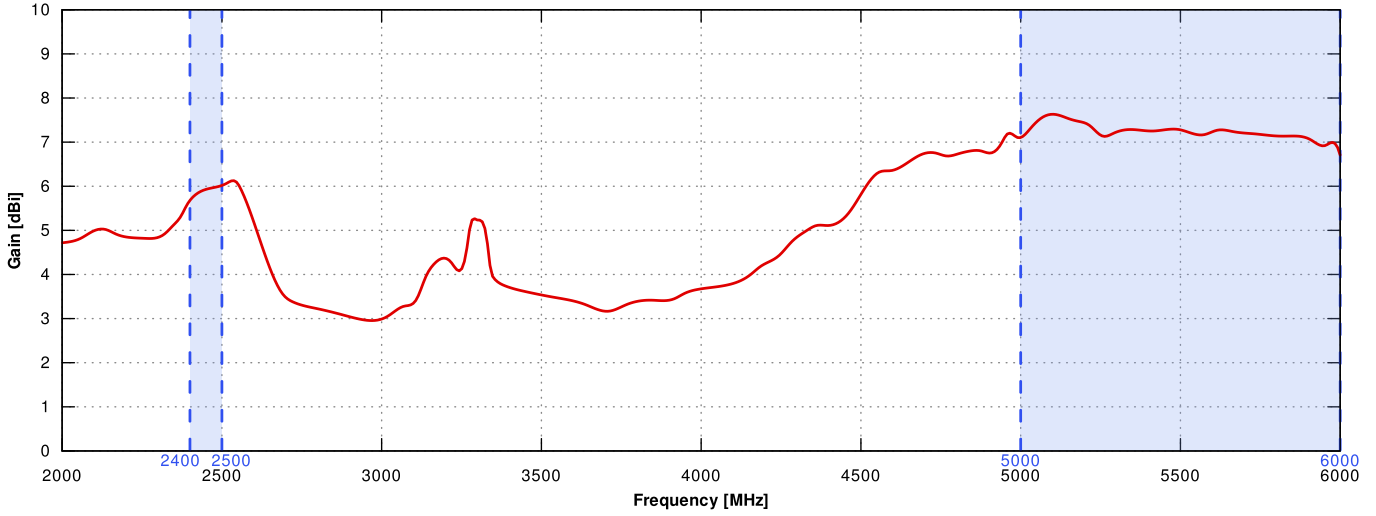



5G/LTE from 617MHz to 950MHz

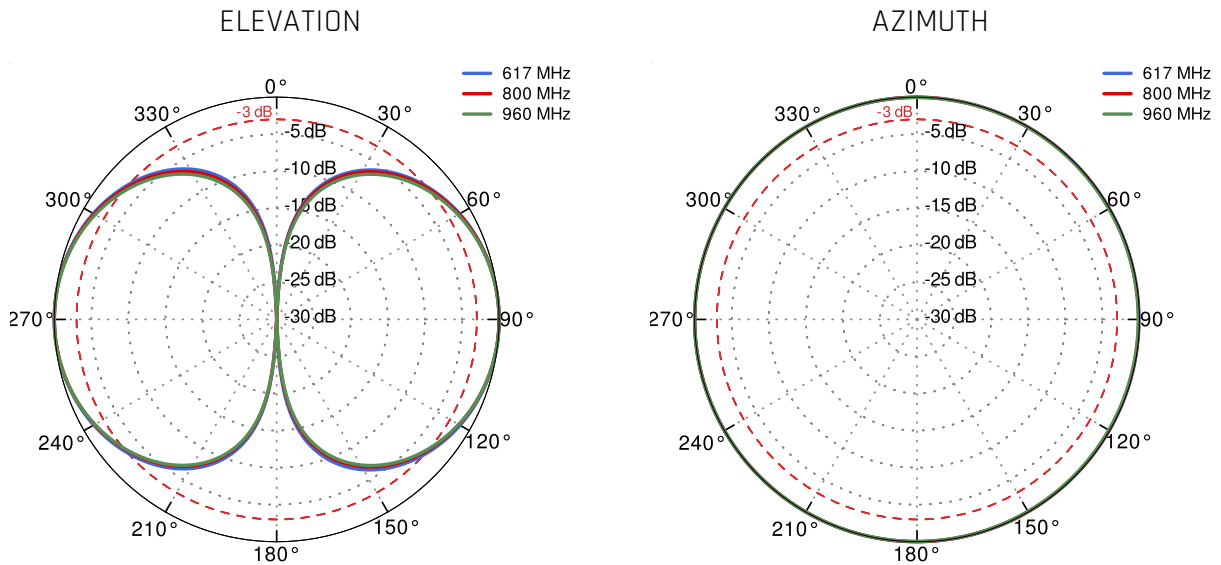



5G/LTE from 1.71GHz to 2.5GHz

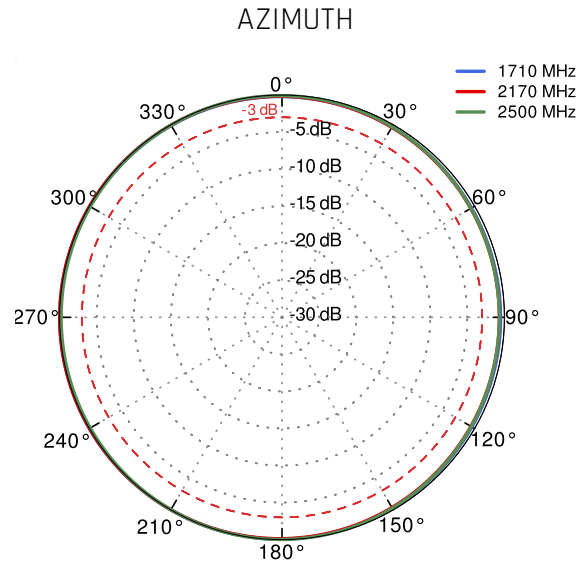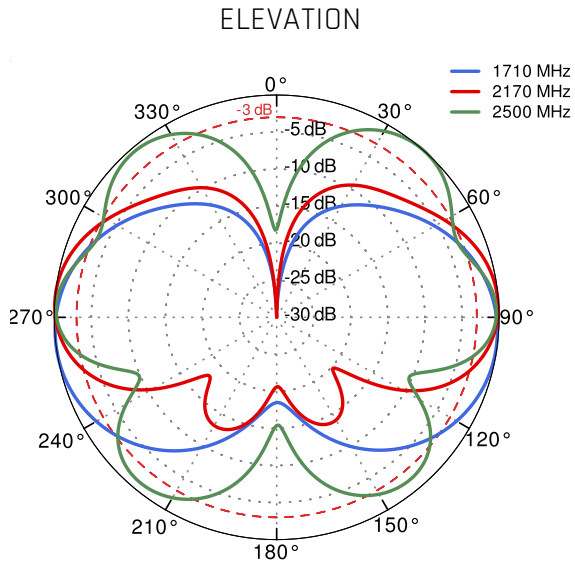



5G/LTE from 3.3GHz to 4.2GHz

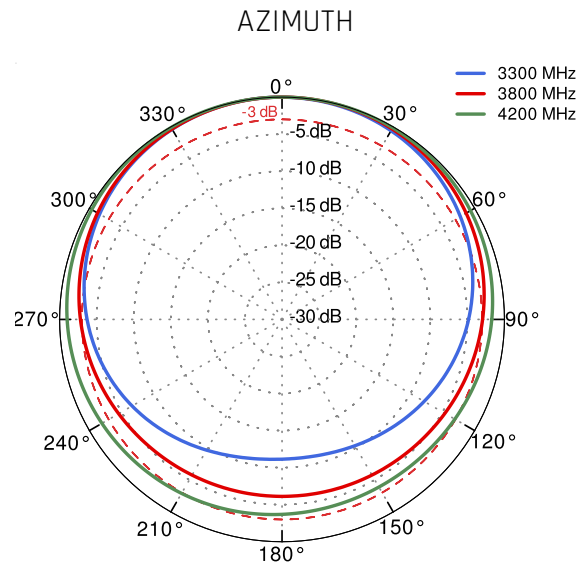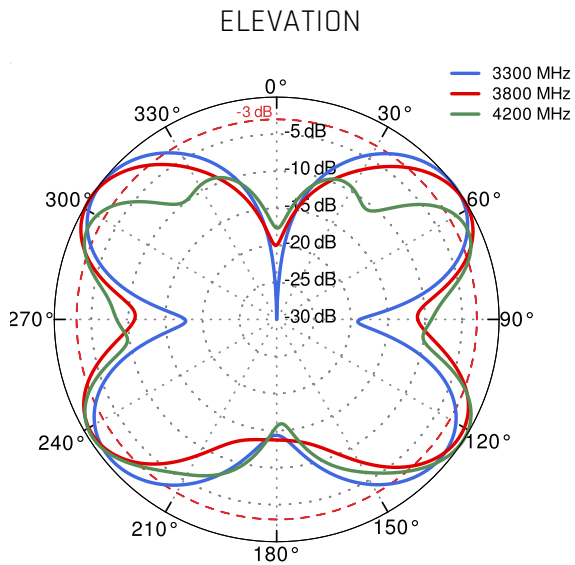

5G/LTE from 4.6GHz to 5.5GHz

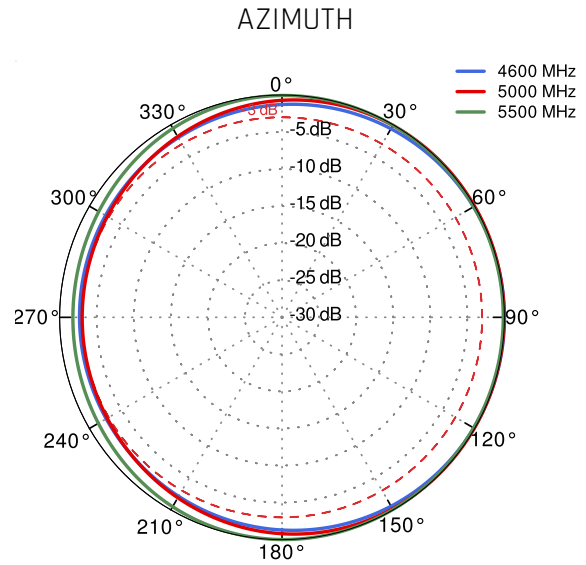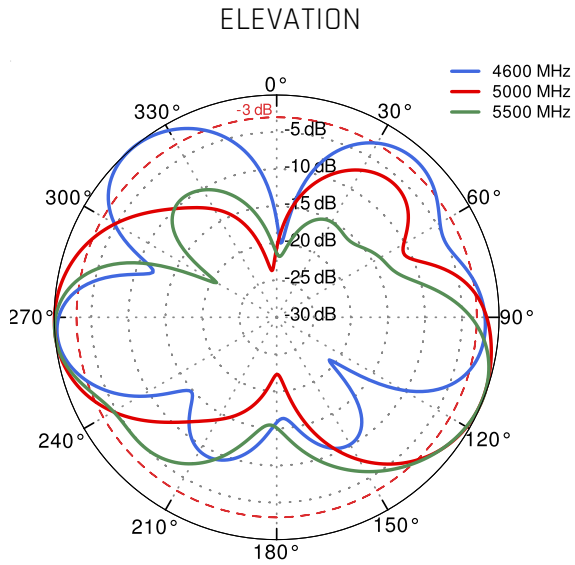

Wi-Fi 2.4GHz and 5GHz and 6GHz

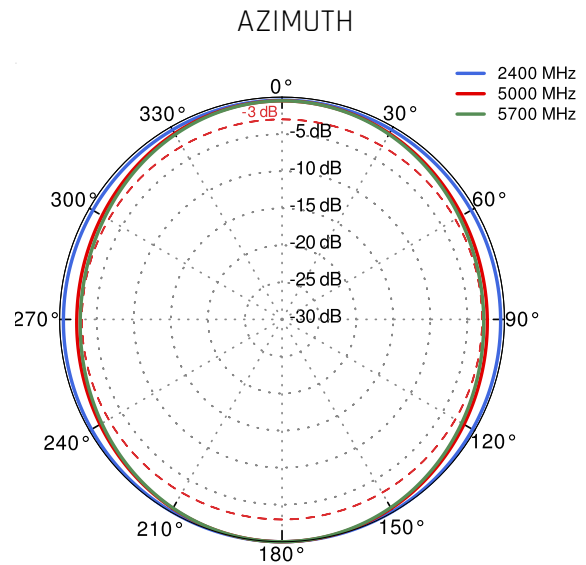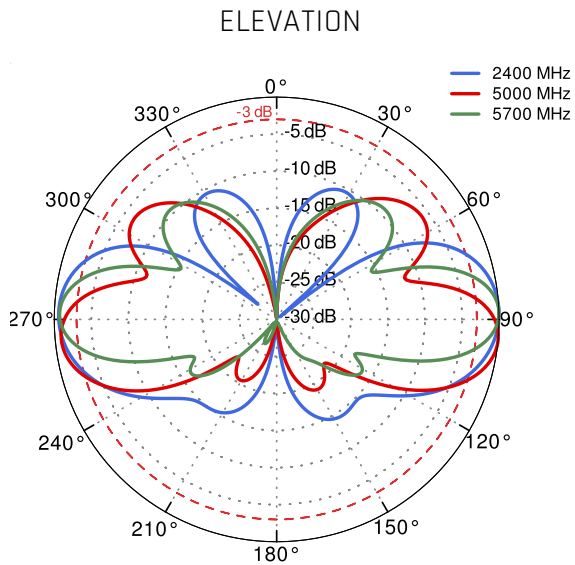

## DIMENSIONS

