

QuMax Omni for Perle IRG5541 / IRG5500

INTEGRATED MULTI-BAND 5G OMNI ANTENNA + WIFI OMNI ANTENNA + GPS ANTENNA + POE SPLITTER + PLACE TO INSTALL PERLE IRG5541 / IRG5500 (ALL-IN-ONE)

QuMax Omni all-in-one antenna for Perle IRG5541 / IRG5500 router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni 5G, Wi-Fi and GPS antenna. If you use IRG5541 / IRG5500 with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.

5G**Wi Fi 6E****GPS**
617-6000MHz
6 dBi
**OMNI
DIRECTIONAL**
IP 67
-40° TO +80°

OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67




ANTENNA PERFECTLY MATCHED WITH THE PERLE IRG5541 / IRG5500



ALL ANTENNAS AND PERLE ROUTER INTEGRATED IN ONE ENCLOSURE



MADE IN EUROPE

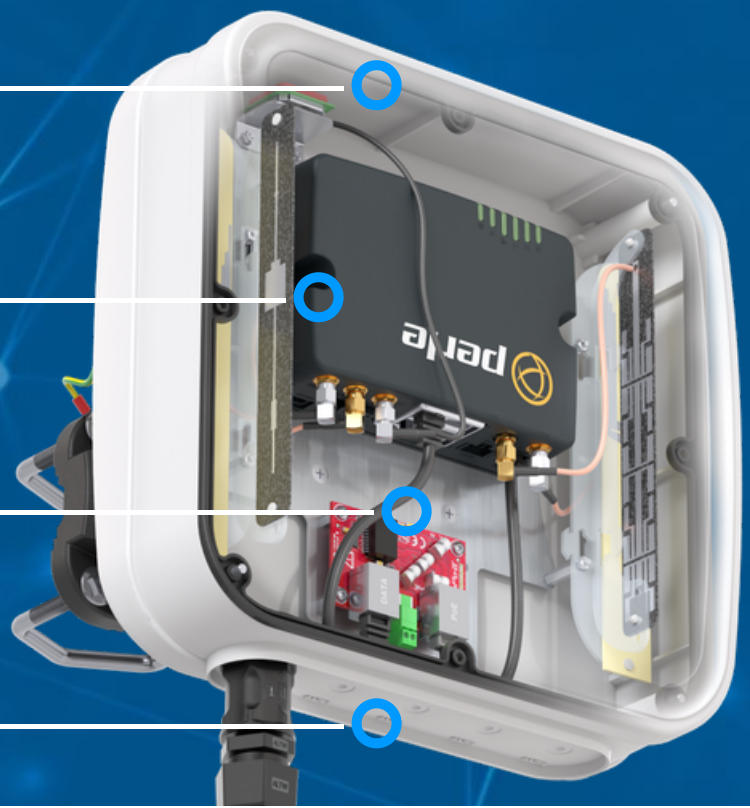

5G/LTE SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 GHz : 2.5dBi
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	2x SMA

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
VSWR	< 1.50, max < 2.00
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	2x SMA

GPS SPECIFICATION

FREQUENCY	1.56 - 1.61 GHz
VSWR	< 2
GAIN	3 dBi
GAIN 3V	28 dBi
DC POWER INPUT	2.5 V ~ 6.5 V
POWER CONSUMPTION	2.5-6.5mA
IMPEDANCE	50 Ω
POLARIZATION	RHCP (right hand circularly polarized)

CONNECTOR

1x SMA

MECHANICAL SPECIFICATION

MATERIAL

ABS, aluminum, PTFE, Fiberglass

INGRESS PROTECTION

IP67

CONNECTOR TYPE

RJ45

DIMENSIONS

270.0 x 270.0 x 96.0 mm
10.60 x 10.60 x 3.78 inch

OPERATING TEMPERATURE

From -40°C to 75°C
From -40°F to 167°F

ENCLOSURE RECOMMENDED
TIGHTENING TORQUE

0.6 - 0.8 Nm

MOUNTING KIT

DIMENSIONS

9.9 x 10.5 x 14.8 cm
3.9 x 4.13 x 5.83 inch

REGULATION RANGE

+/- 30°

MAST DIAMETER RANGE

25 - 66mm
0.98-2.60 inch

MATERIAL

Polyamide with fiberglass + galvanized steel U-Bolts

WEIGHT


0.87kg

MOUNTING PLACE


Wall or mast or ceiling

PLOTS


VSWR for 5G/LTE antenna

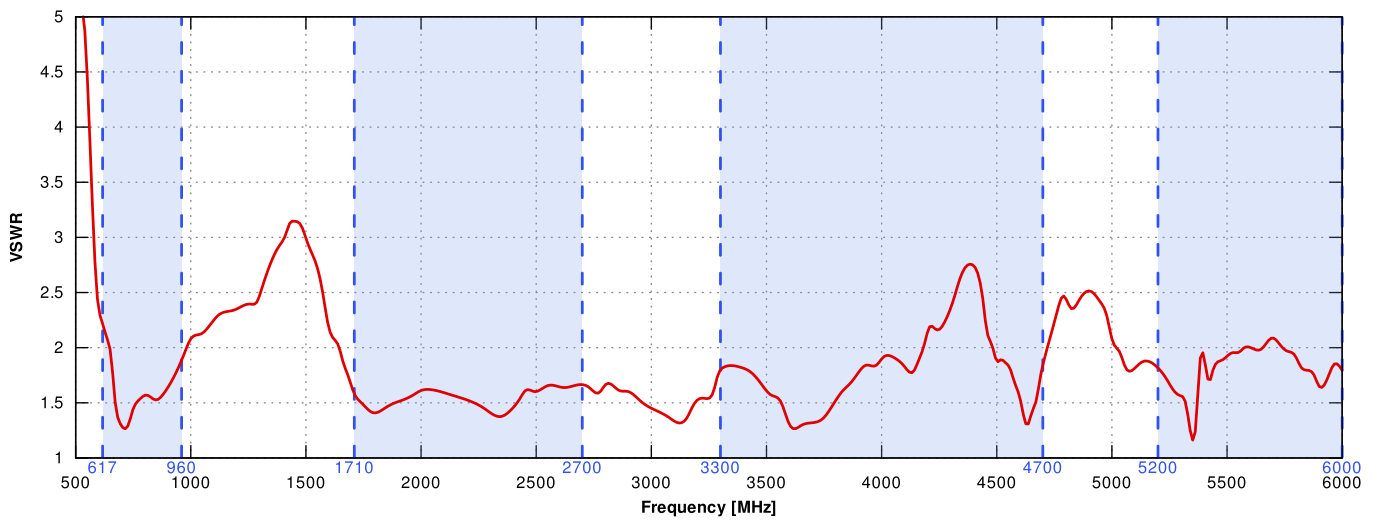


VSWR for Wi-Fi antenna

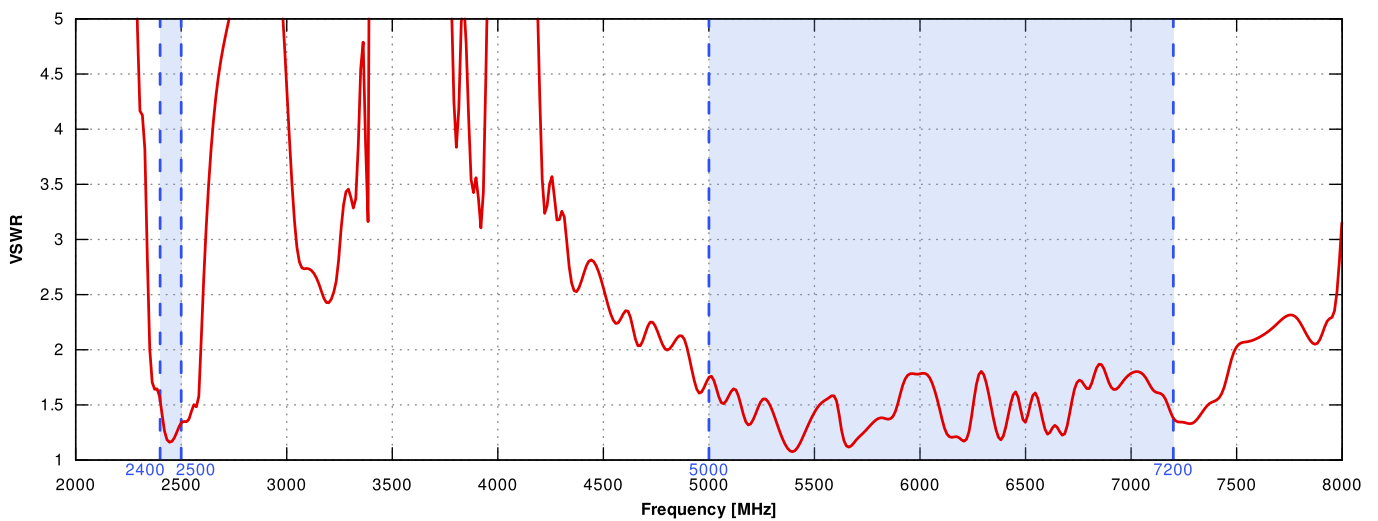


Gain for 5G/LTE antenna

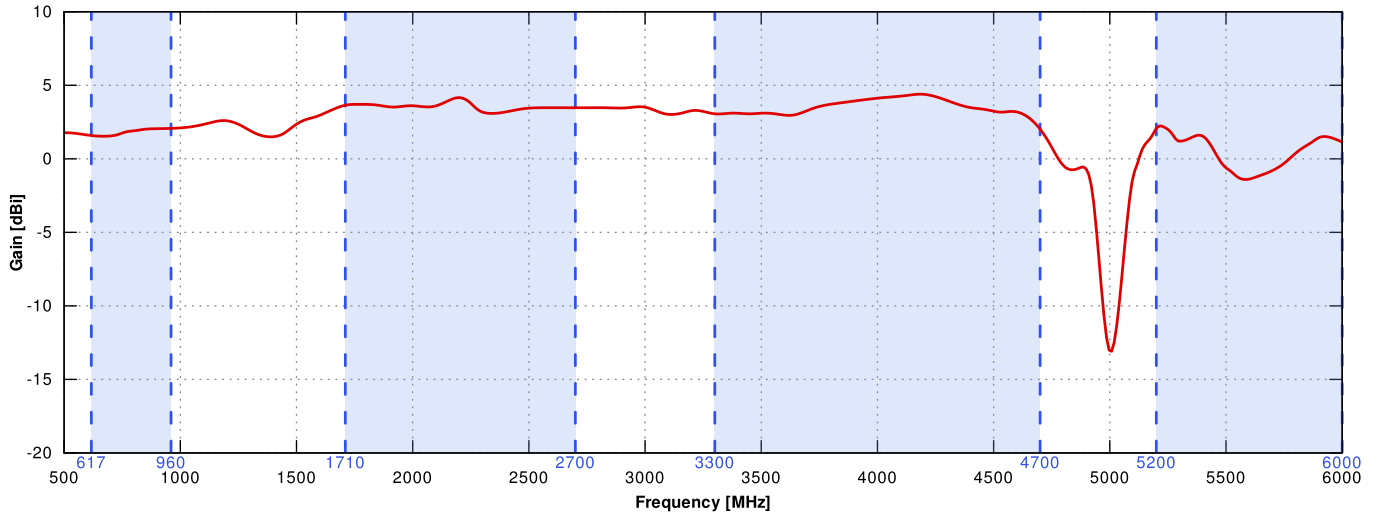


Gain for Wi-Fi antenna

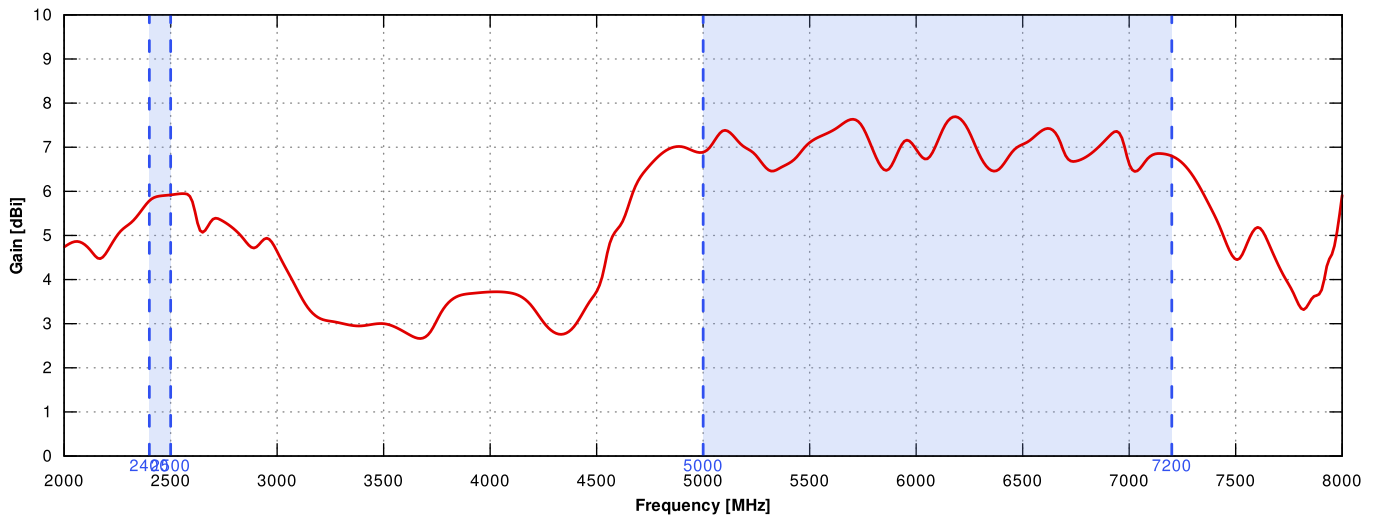


5G/LTE from 650MHz to 950MHz

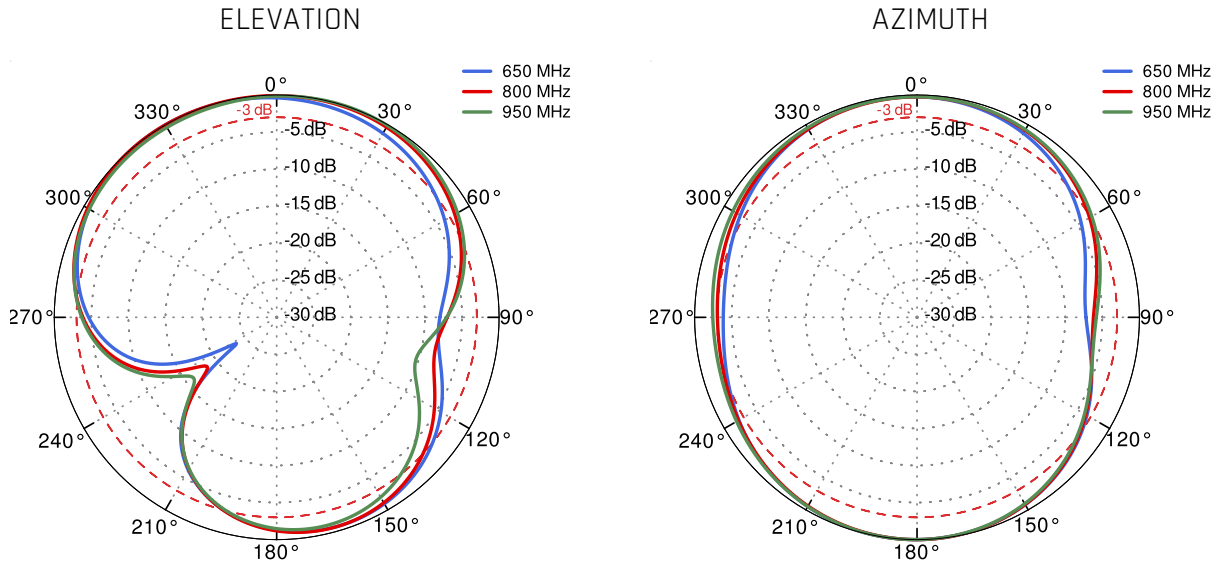


5G/LTE from 1.71GHz to 2.5GHz

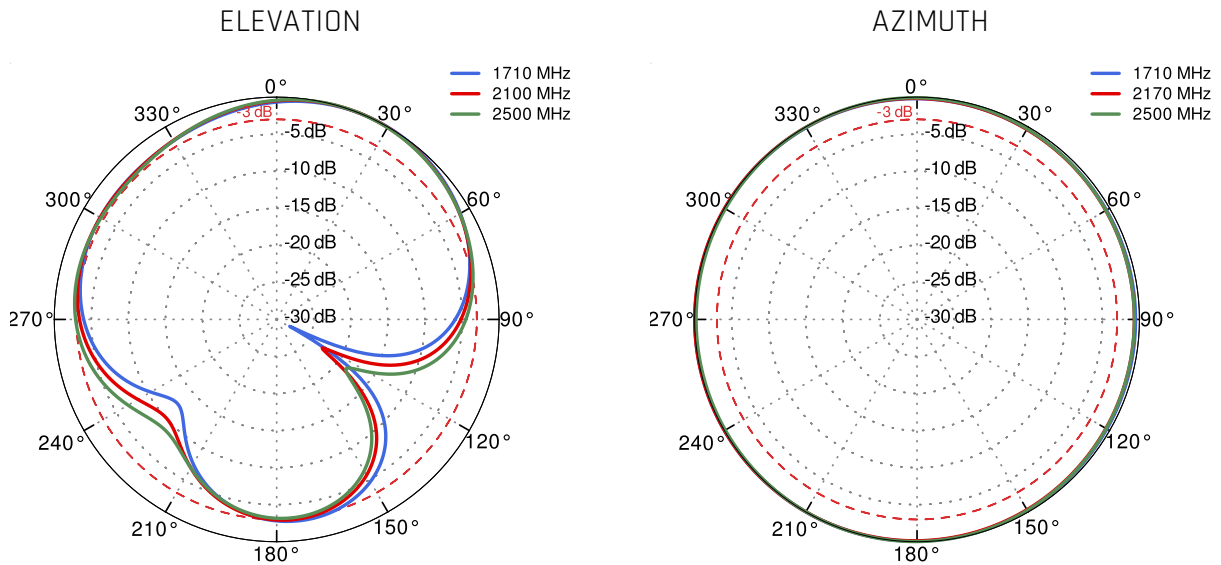


5G/LTE from 3.3GHz to 4.2GHz

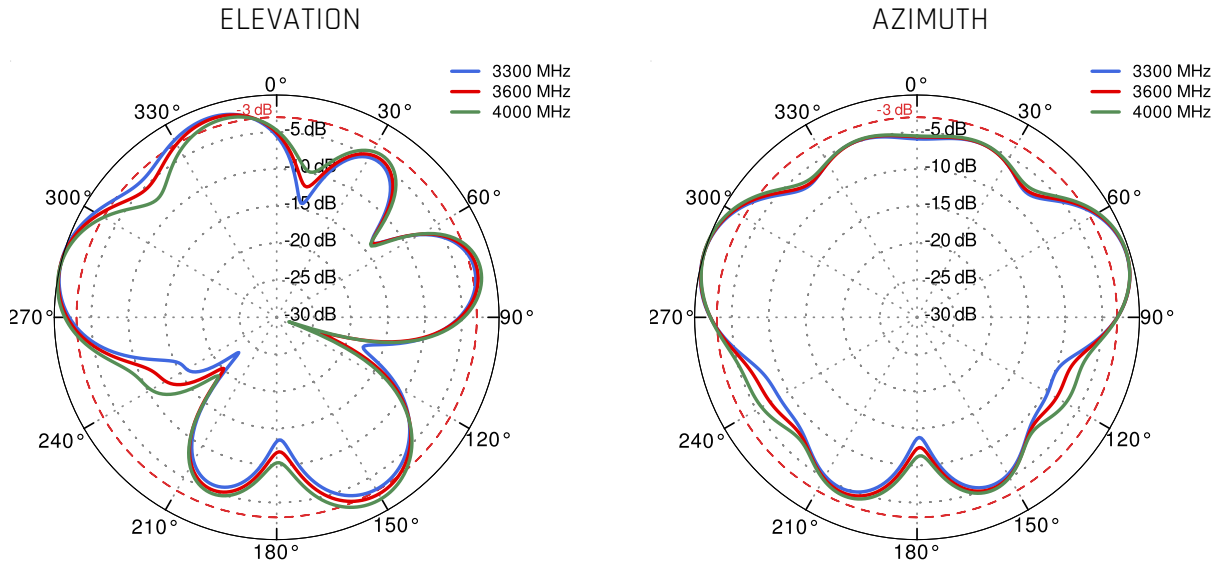

5G/LTE from 4.5 GHz to 5.5 GHz

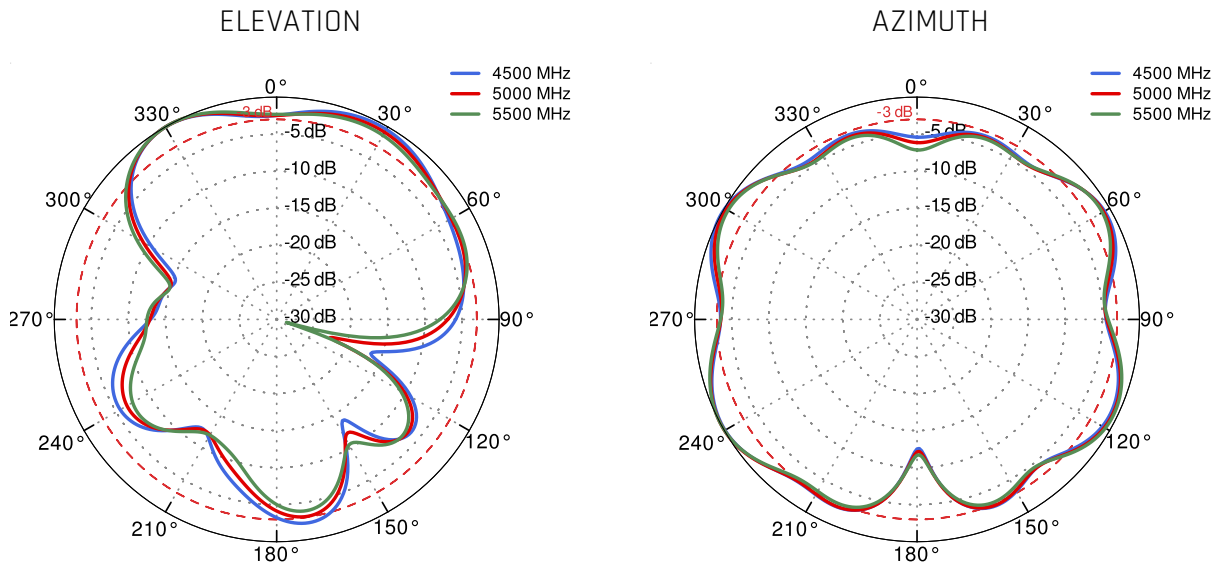

Wi-Fi 2.4GHz - 5GHz

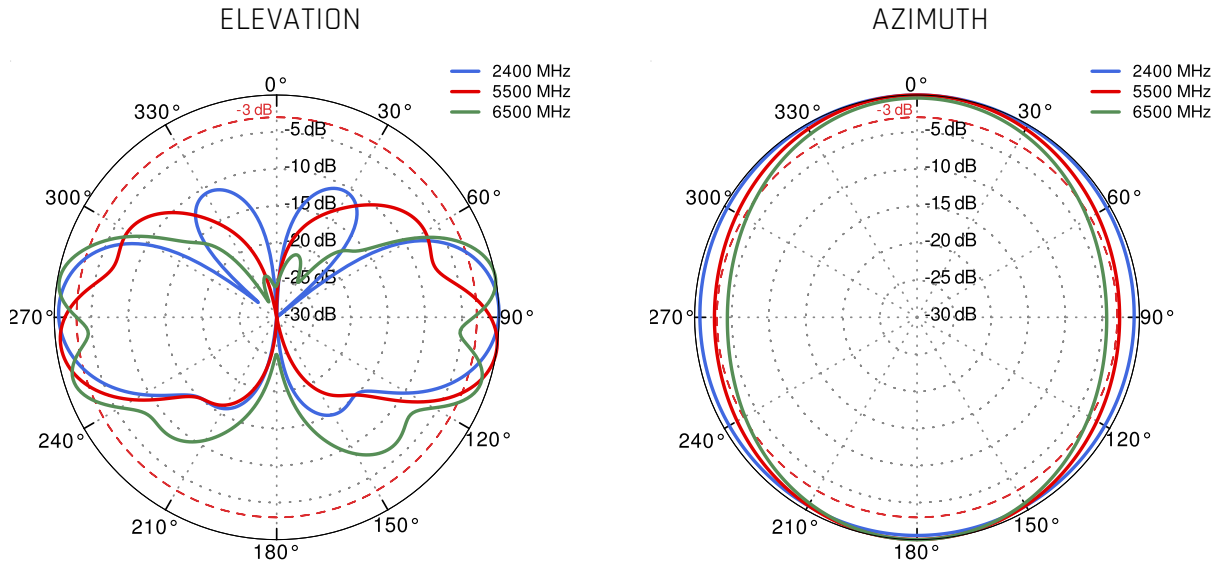

DIMENSIONS

