QuMax Omni for Cradlepoint R1900

INTEGRATED MULTI-BAND 5G OMNI ANTENNA + GPS ANTENNA + WI-FI ANTENNA + BLUETOOTH ANTENNA + PASSIVE POE SPLITTER + PLACE TO INSTALL CRADLEPOINT R1900 (ALL-IN-ONE)

QuMax Omni all-in-one antenna for Cradlepoint R1900 router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni 5G, Wi-Fi, BT and GPS antenna. If you use R1900 with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.
The set contains a Passive PoE splitter, allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.

5G | 600-6350MHz | 4 dBi | Wi Fi 6E | GPS | BLUETOOTH | OMNI DIRECTIONAL | IP 67 | -40° TO +80°

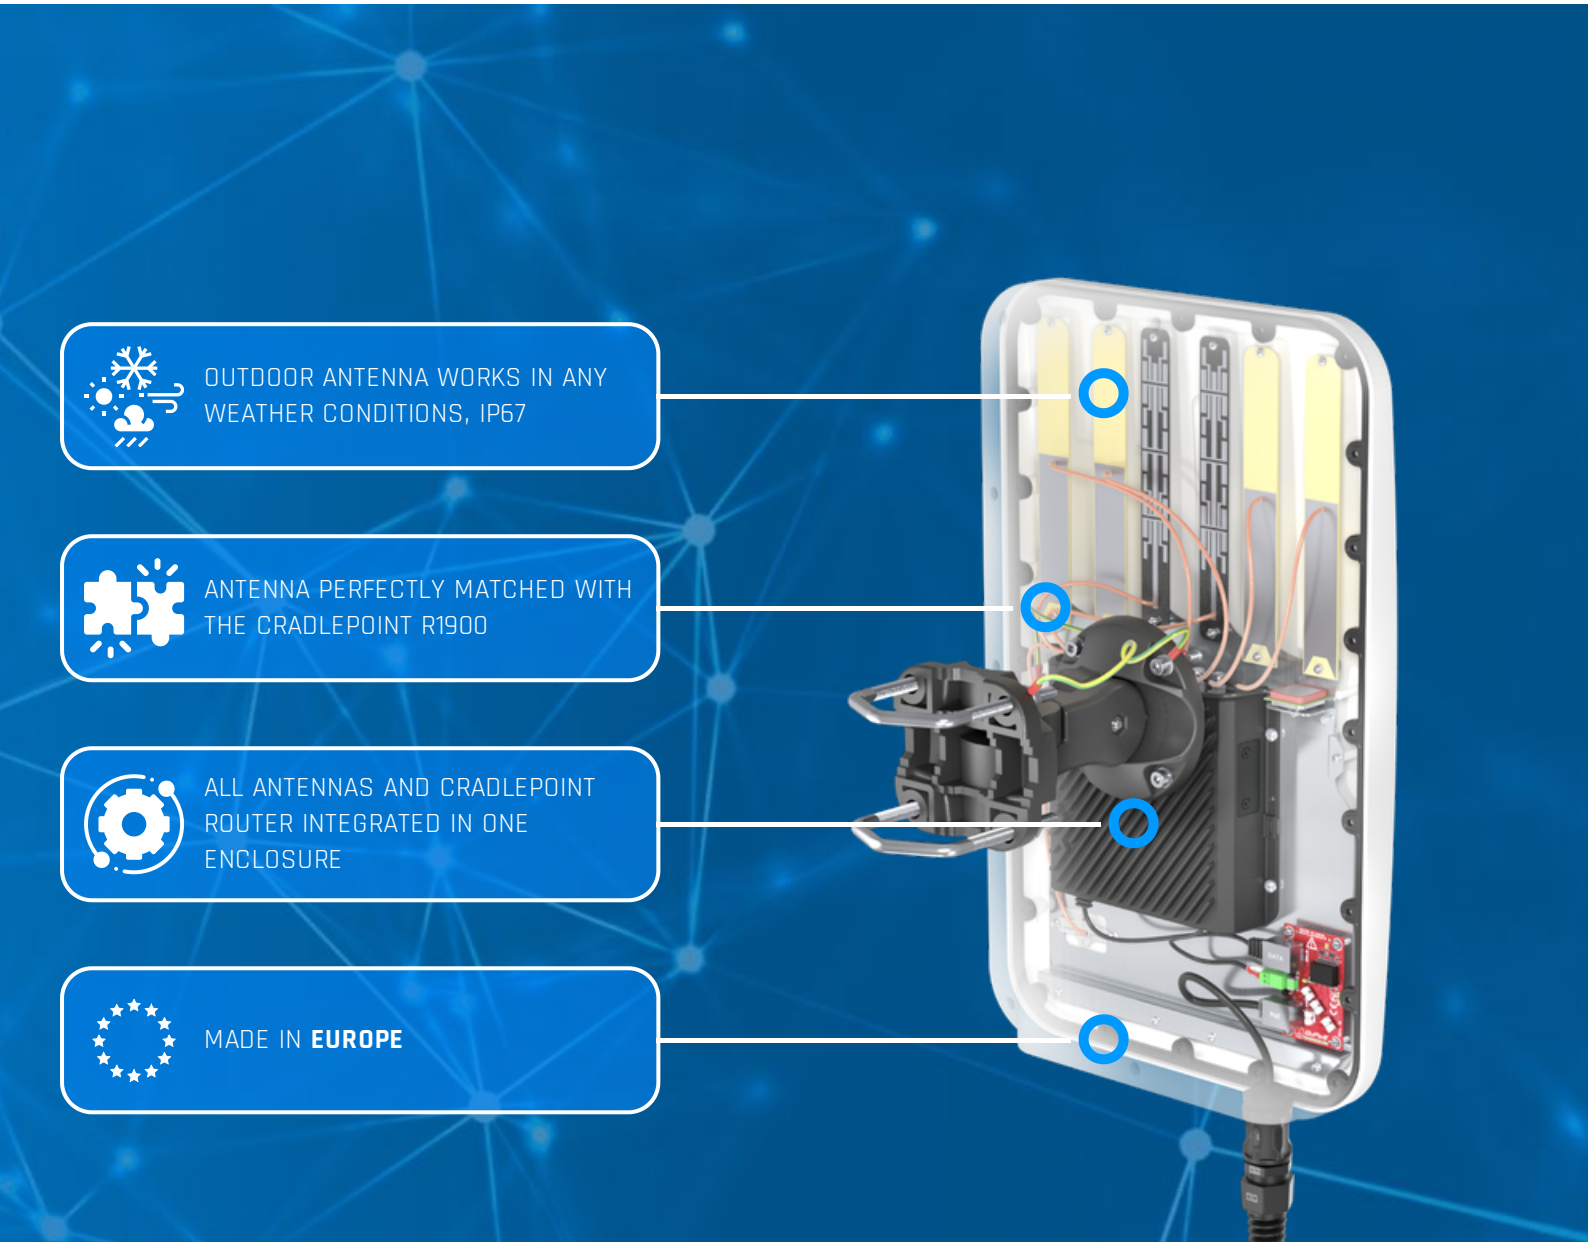

5G/LTE SPECIFICATION

FREQUENCY	0.6 - 1.4 GHz 1.5 - 3.0 GHz 3.0 - 5.0 GHz 5.0 - 6.35 GHz
MAX. GAIN	0.6 - 1.4 GHz : 2.6 dBi 1.5 - 3.0 GHz : 4.2 dBi 3.0 - 5.0 GHz : 4.4 dBi 5.0 - 6.35 GHz : 2.1 dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 23, 24, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 54, 65, 66, 67, 68, 69, 70, 71, 85, 103, 106, 107, 111, 252, 253, 254, 255, 256
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n24, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n54, n65, n66, n67, n68, n70, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n99, n100, n101, n105, n106, n250, n251, n252, n253, n254, n255, n256
VSWR	<2.00, max <3.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
MAX. GAIN	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
VSWR	< 1.50, max < 2.00
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIAL	ASA, aluminum, PTFE, Fiberglass
INGRESS PROTECTION	IP67
CONNECTOR TYPE	RJ45
DIMENSIONS	290.0 x 480.0 x 76.0 mm 11.41 x 18.89 x 2.99 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.6 - 0.8 Nm

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 66mm 0.98-2.60 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
WEIGHT	0.87kg
MOUNTING PLACE	Wall or mast or ceiling

PLOTS

VSWR for 5G/LTE antenna

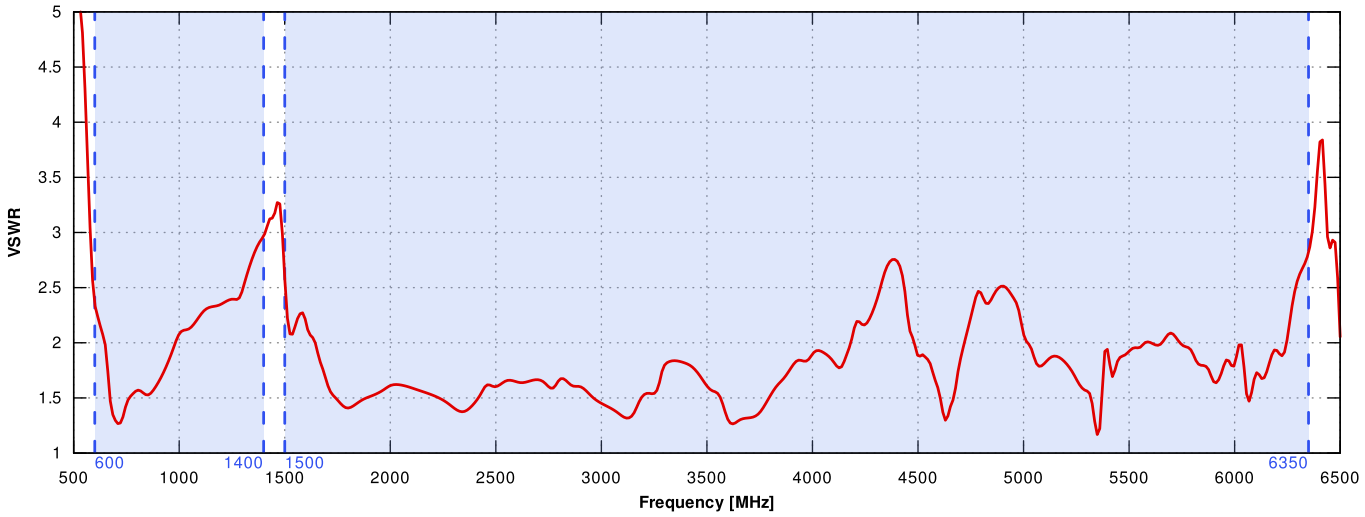

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

VSWR for Wi-Fi antenna

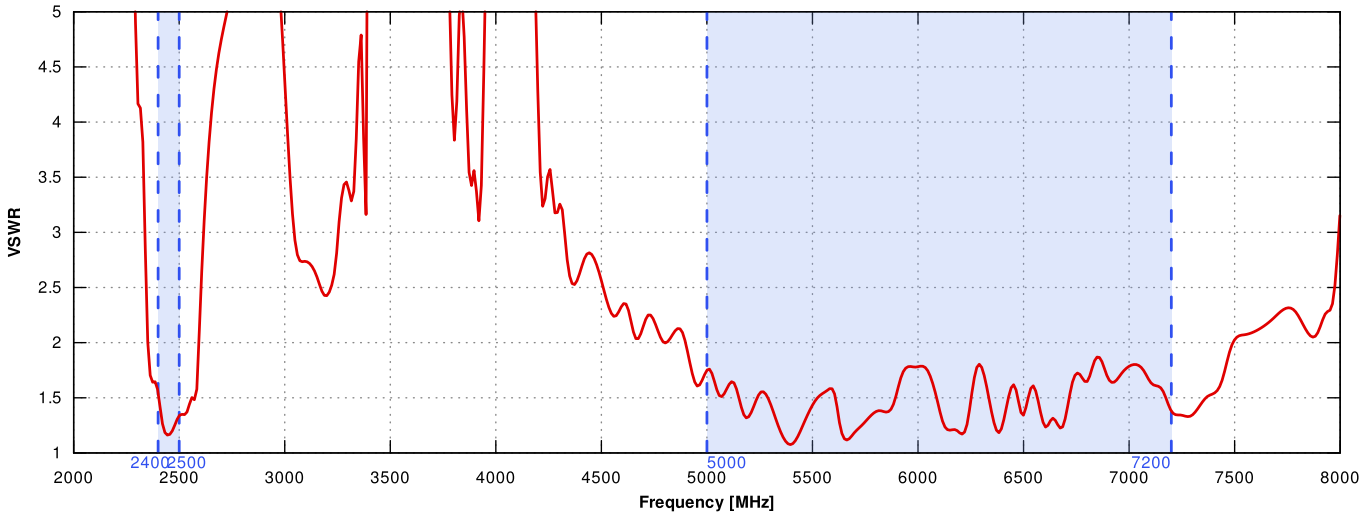

VSWR for Bluetooth antenna

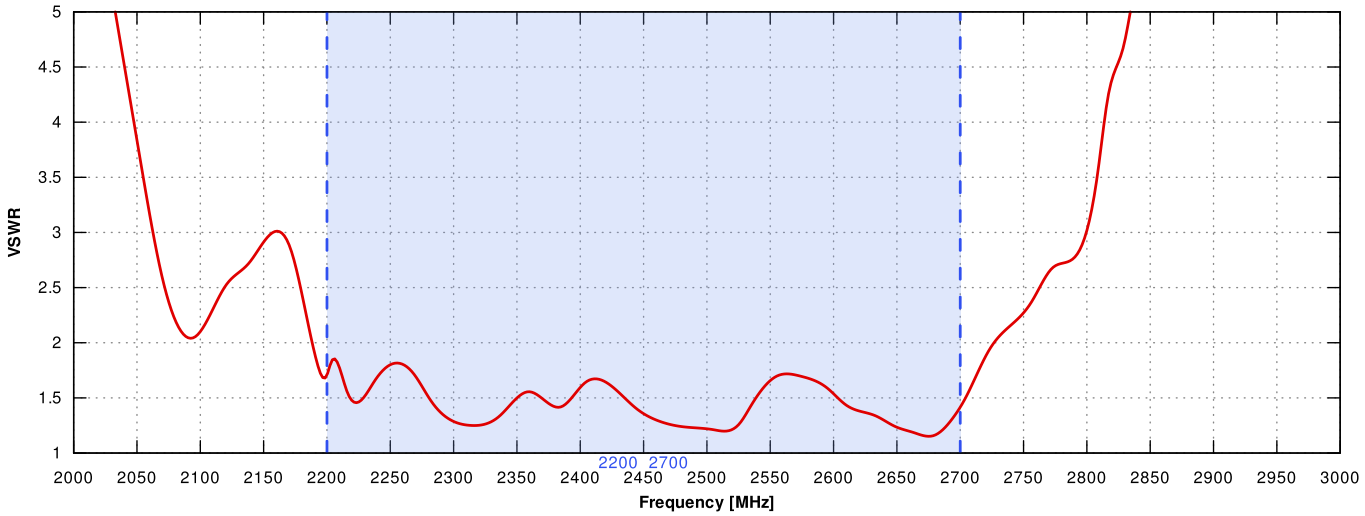

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

Gain for 5G/LTE antenna

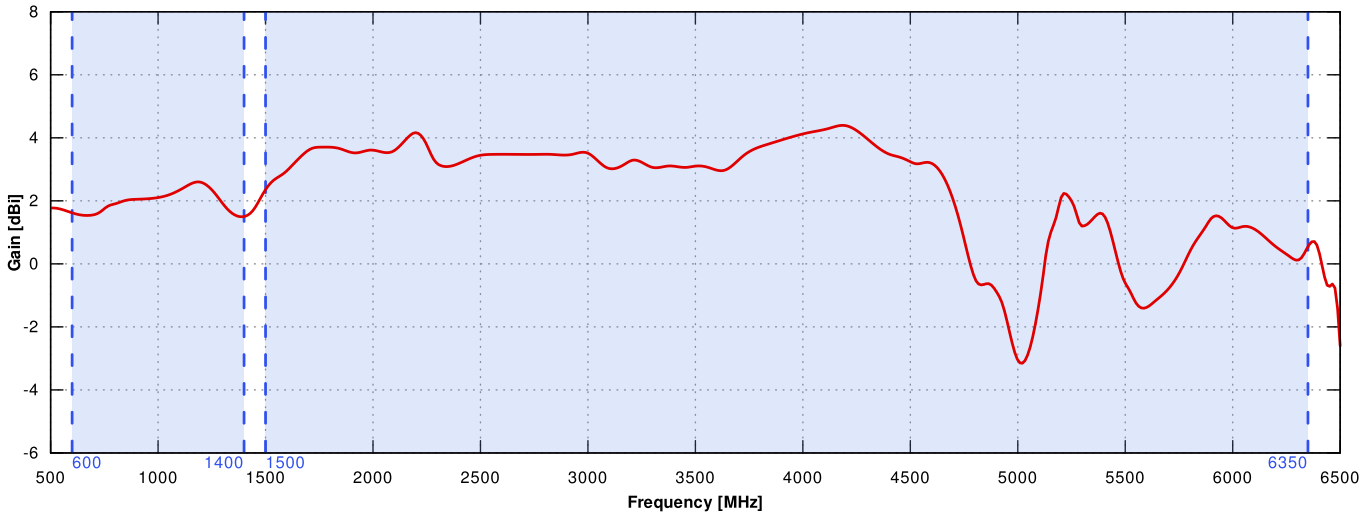

Gain for Wi-Fi antenna

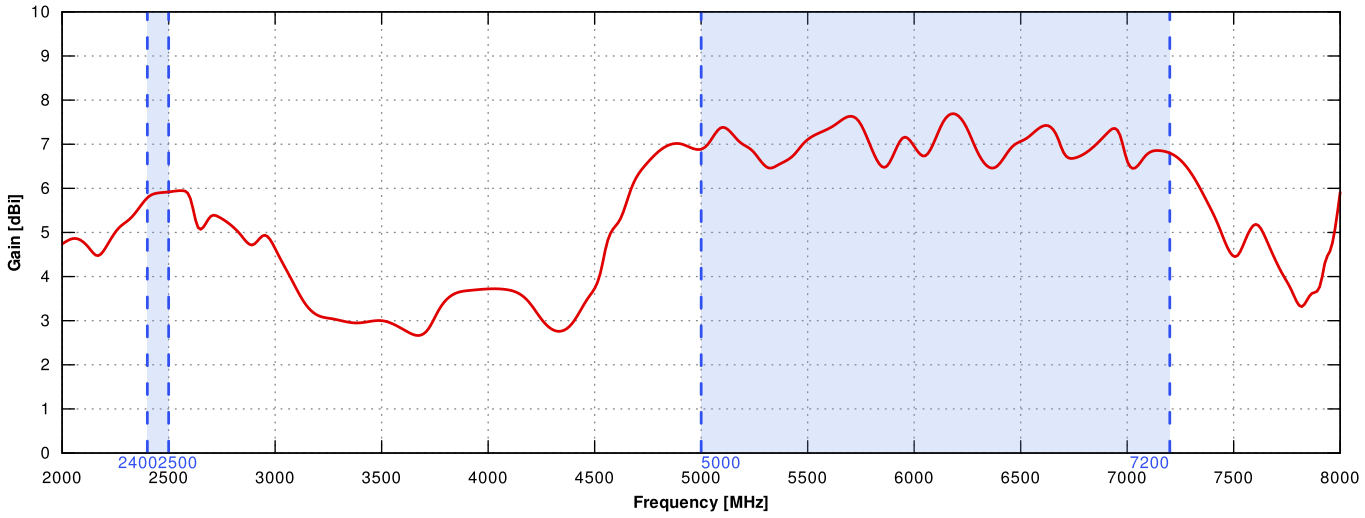

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

Gain for Bluetooth antenna

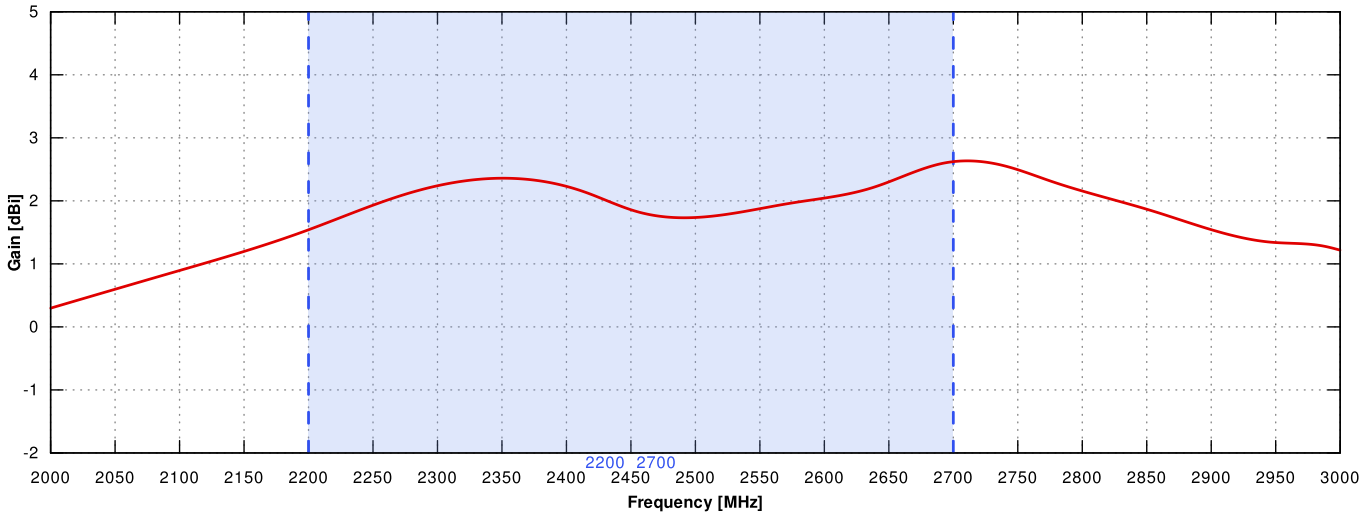

5G/LTE from 650MHz to 950MHz

ELEVATION

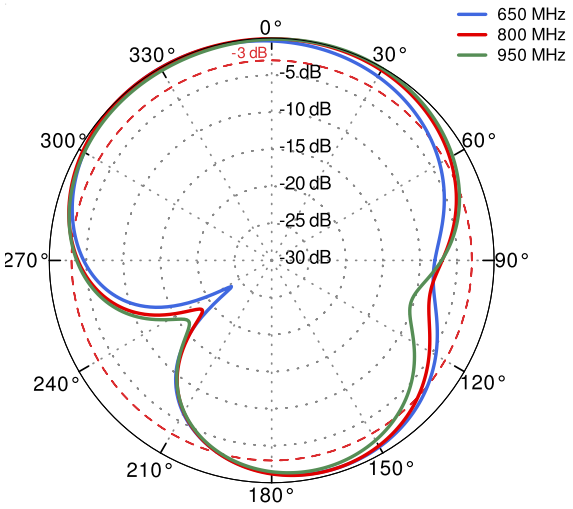

AZIMUTH

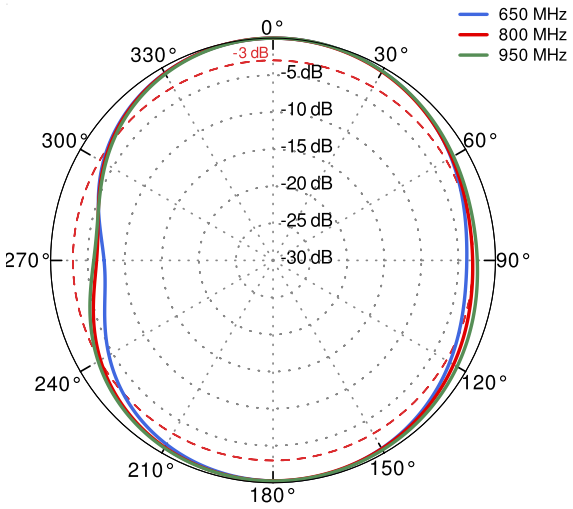

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

5G/LTE from 1.71GHz to 2.5GHz

ELEVATION

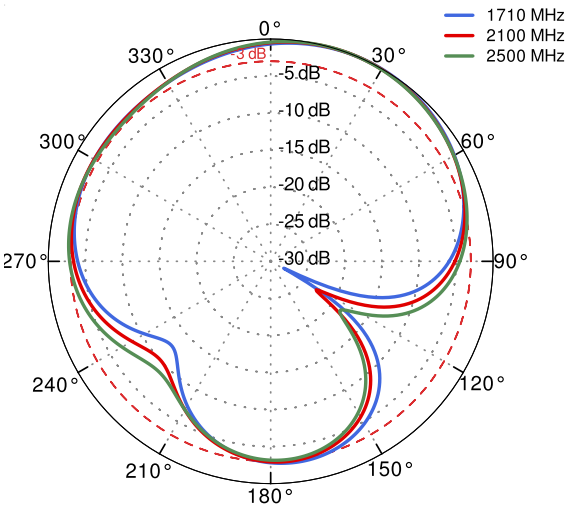

AZIMUTH

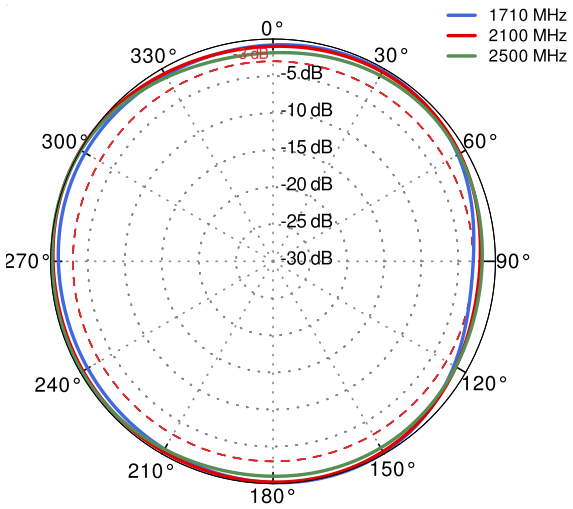

5G/LTE from 3.3GHz to 4.0GHz

ELEVATION

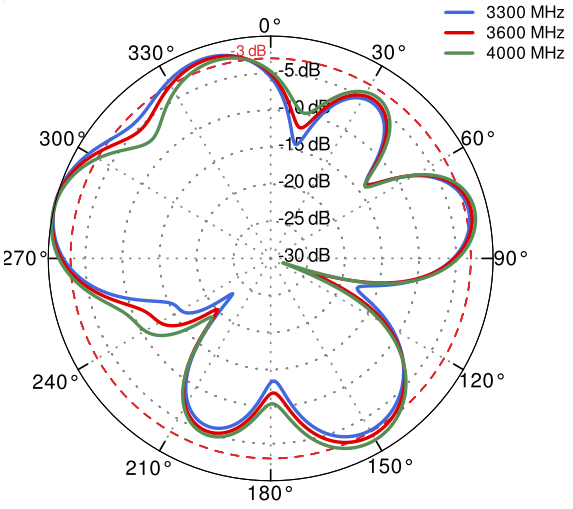

AZIMUTH

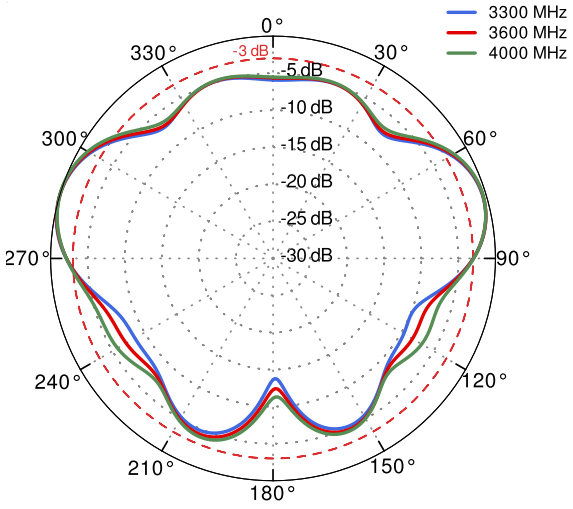

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

5G/LTE from 4.5 GHz to 5.5 GHz

ELEVATION

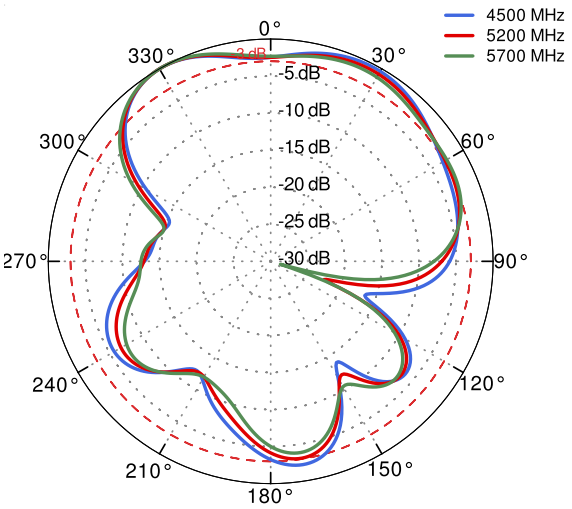

AZIMUTH

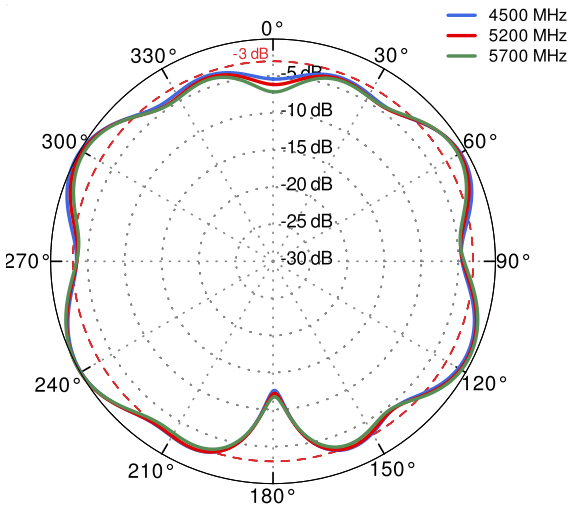

Wi-Fi From 2.4 GHz to 6.5 GHz

ELEVATION

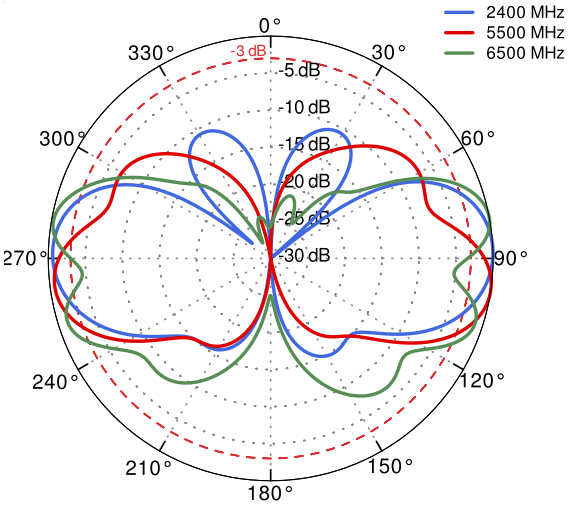

AZIMUTH

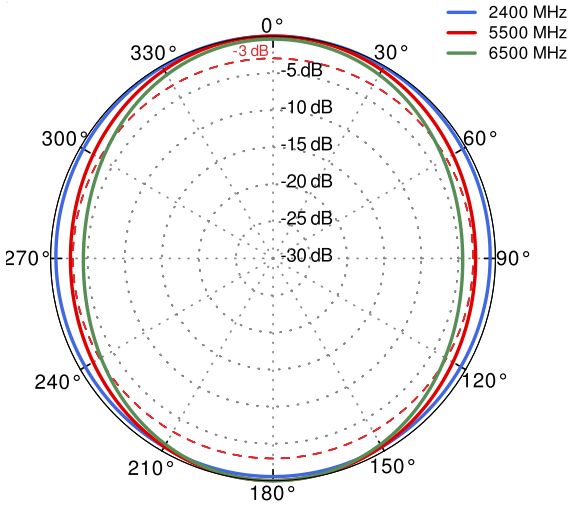

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

Bluetooth

ELEVATION

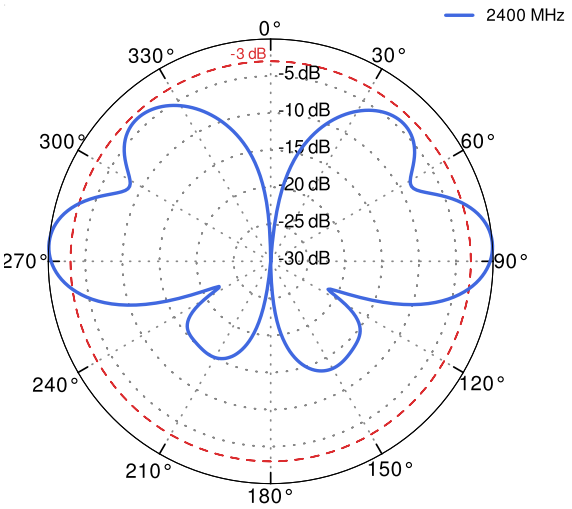

AZIMUTH

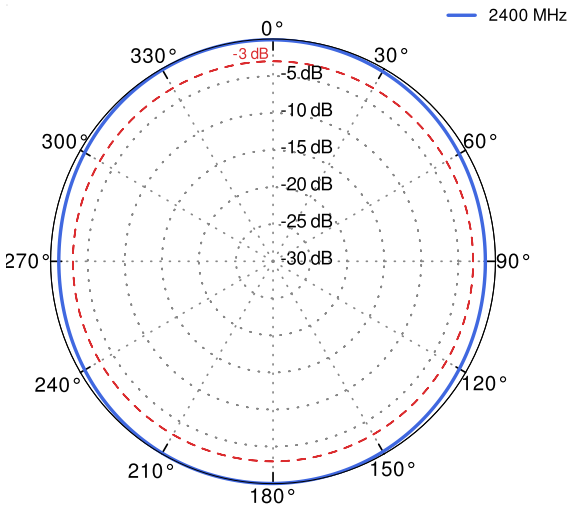

DIMENSIONS

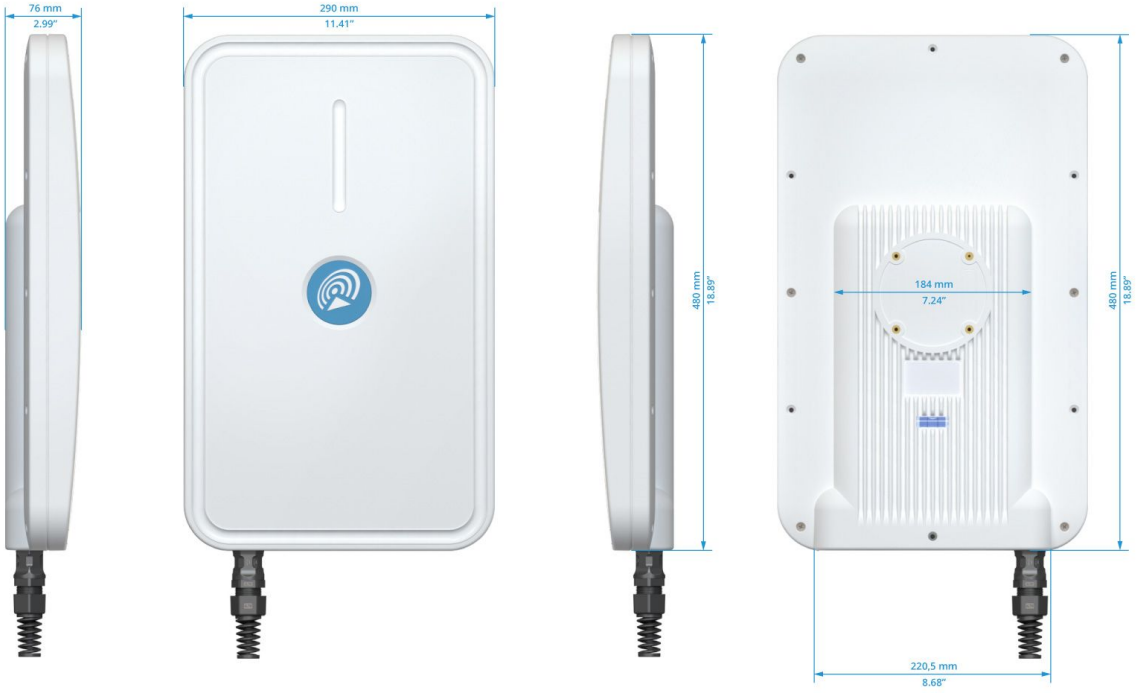

QuWireless
WWW.QUWIRELESS.COM
Sales email: sales@quwireless.com **Tel:** +48 513 900 416
Support email: support@quwireless.com **Website:** www.quwireless.com
Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.