
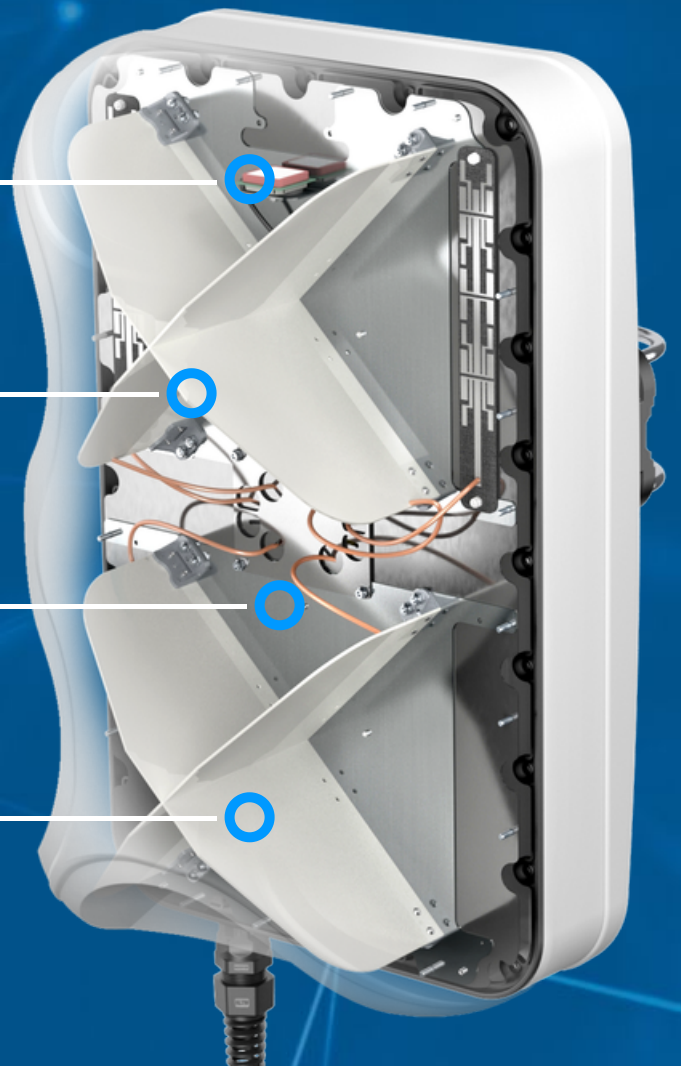


# QuMax for Teltonika RUTM50

## INTEGRATED MULTI-BAND LTE & 5G PANEL ANTENNA + WI-FI OMNI ANTENNA + GPS + PLACE TO INSTALL TELTONIKA RUTM50 (ALL-IN-ONE)

QuMax for RUTM50 is a high performance directional antenna designed for use in a variety of wireless communication applications. This all-in-one product consists of multi-band 5G, Wi-Fi and GPS antennas integrated in IP68 (IP67) enclosure. It offers 8 dBi gain and wide beamwidth, which makes it suitable for use in both urban and rural environments.

Combining QuMax with RUTM50 inside the antenna housing gives you complete outdoor solution with multiple use scenarios such as transportation public, energy, mining IoT and more.



## 5G / LTE ANTENNA SPECIFICATION

<b>FREQUENCY</b>	0.617 - 1.0 GHz 1.0 - 3.08 GHz 3.3 - 5.0 GHz 5.0 - 6.5 GHz
<b>MAX. GAIN</b>	0.617 - 1.0 GHz : 6 dBi 1.0 - 3.08 GHz : 8 dBi 3.3 - 5.0 GHz : 6.8 dBi 5.0 - 6.5 GHz : 5.5 dBi
<b>SUPPORTED LTE BANDS</b>	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 65, 66, 67, 68, 69, 70, 71, 74, 75, 76, 85, 103, 106, 111, 252, 253, 254, 255, 256
<b>SUPPORTED 5G BANDS</b>	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n24, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n50, n51, n53, n54, n65, n66, n67, n68, n70, n71, n74, n75, n76, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n91, n92, n93, n94, n95, n97, n98, n99, n100, n101, n102, n106, n109, n110, n250, n251, n252, n253, n254, n255, n256
<b>VSWR</b>	<2.00, max <3.00
<b>BEAMWIDTH</b>	80°/80° ±15°
<b>POLARIZATION</b>	X (+-45degrees)
<b>IMPEDANCE</b>	50 Ω

## WI-FI ANTENNA SPECIFICATION


<b>FREQUENCY</b>	2.40 - 2.50 GHz 5.0 - 7.125 GHz
<b>MAX. GAIN</b>	2.40 - 2.50 GHz : 6 dBi 5.0 - 7.125 GHz : 7.5 dBi
<b>VSWR</b>	<1.70, max <2.00
<b>BEAMWIDTH</b>	360°/25° ±5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## MECHANICAL SPECIFICATION


<b>MATERIALS</b>	ABS, aluminum, PTFE, Fiberglass
<b>CONNECTOR TYPE</b>	RJ45
<b>INGRESS PROTECTION</b>	IP68
<b>DIMENSIONS</b>	486.0 x 292.2 x 105.6 mm 19.13 x 11.50 x 4.16 inch
<b>WEIGHT</b>	2.8 kg 6.17 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 80°C From -40°F to 176°F
<b>ENCLOSURE RECOMMENDED TIGHTENING TORQUE</b>	0.6 - 0.8 Nm
<b>MAST DIAMETER</b>	25-66mm 0.98-2.60 inch

# PLOTS


## VSWR for 5G/LTE antenna

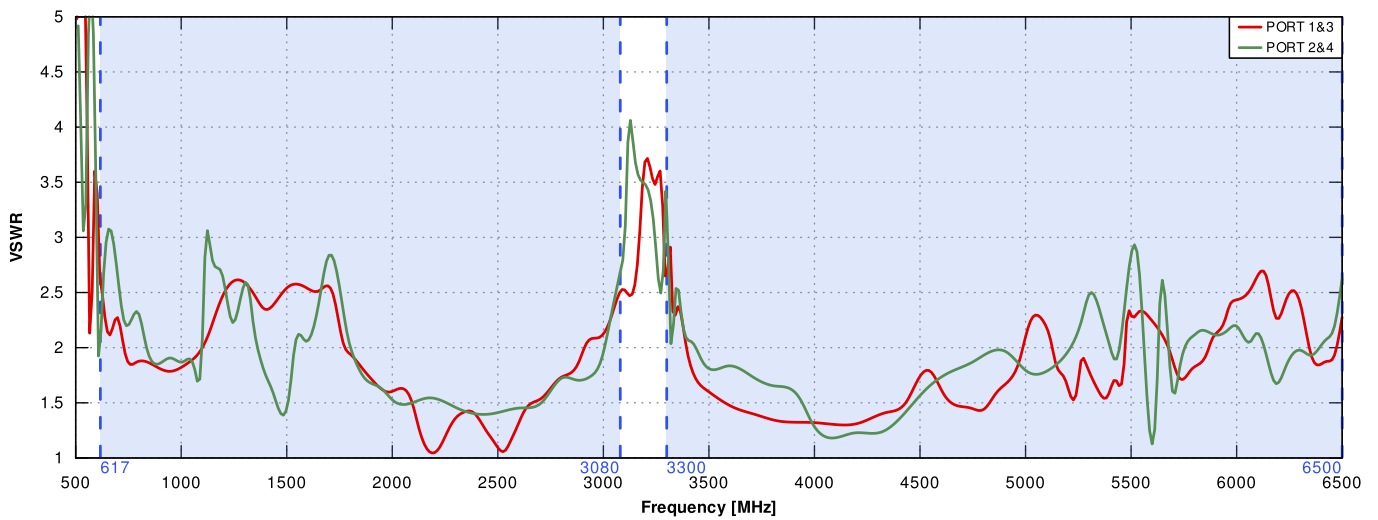


## VSWR for Wi-Fi antenna

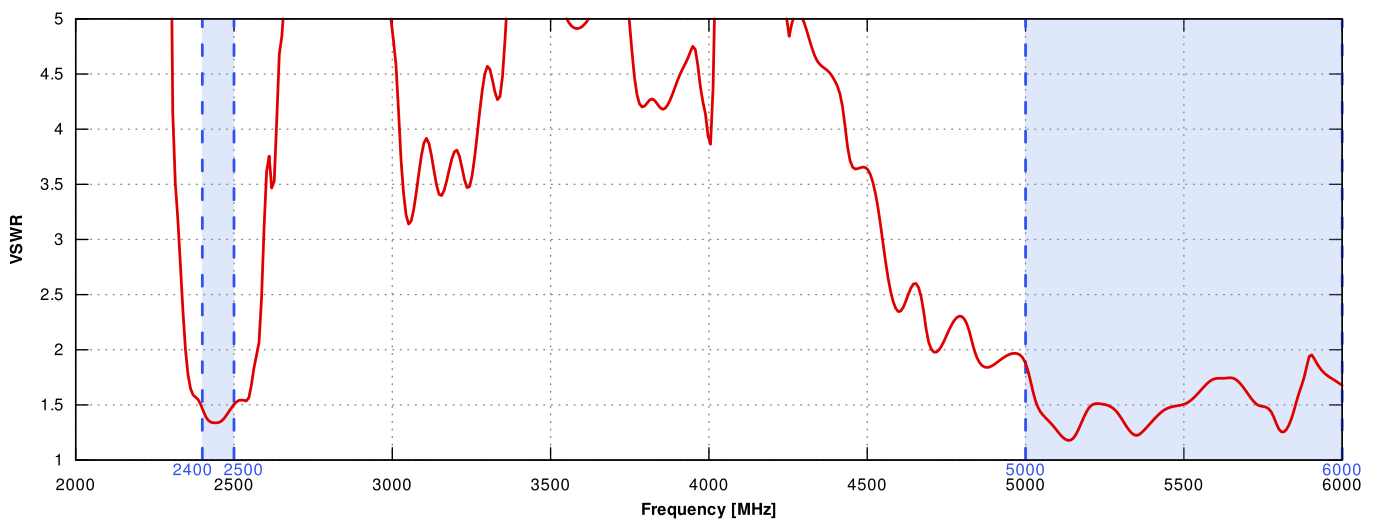


Gain for 5G/LTE antenna

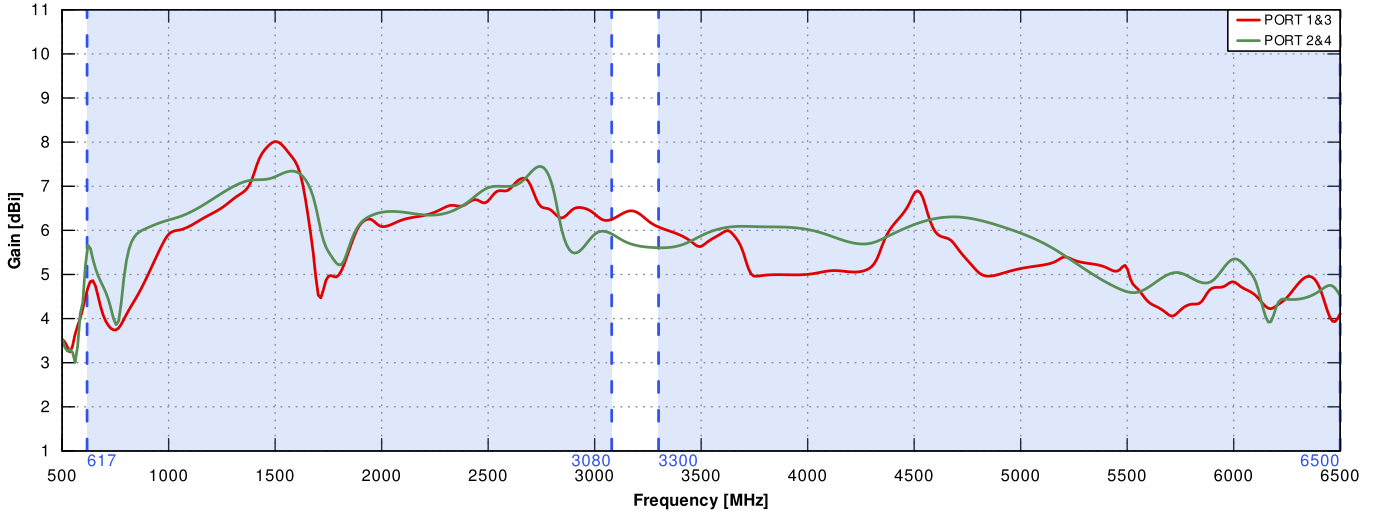


Gain for Wi-Fi antenna

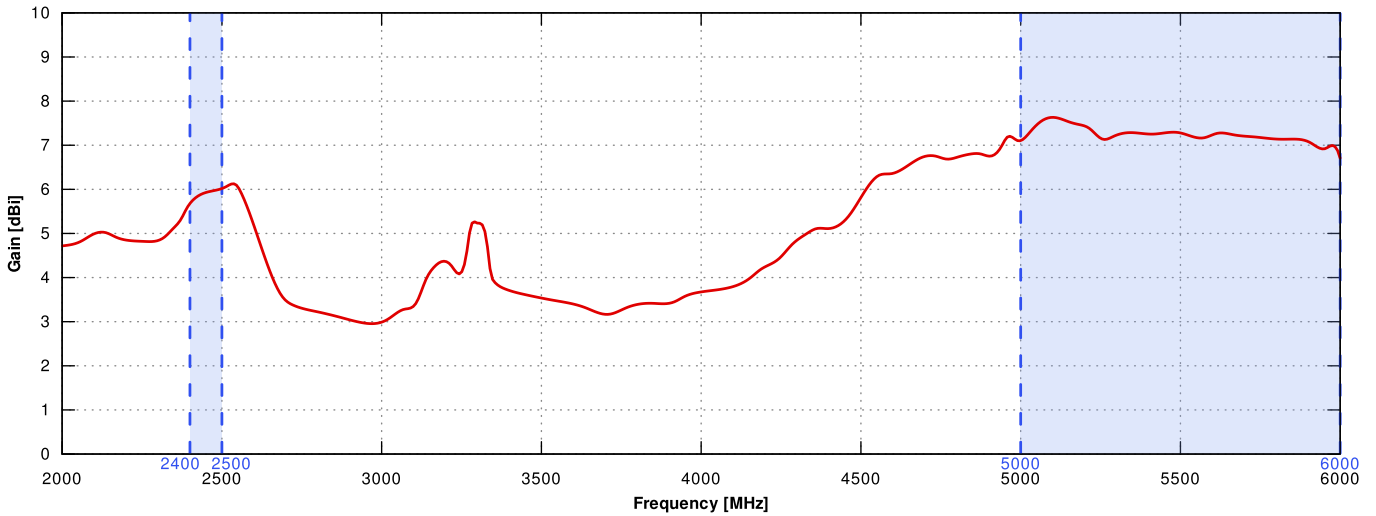


PORT 1&3 - 5G/LTE from 650MHz to 950MHz

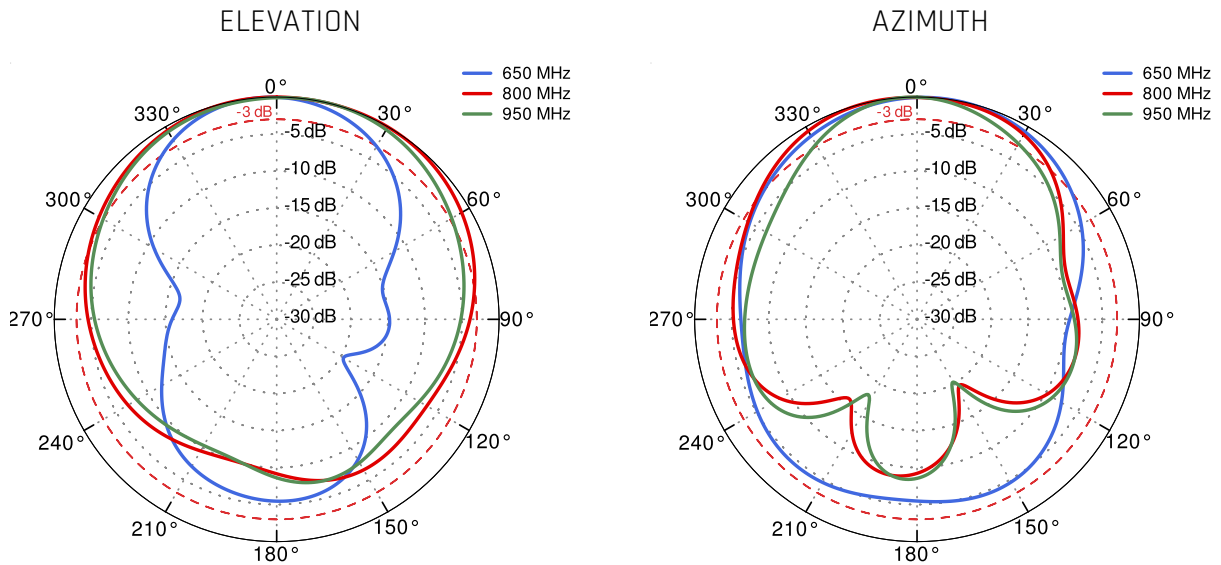


PORT 1&3 - 5G/LTE from 1.71GHz to 2.17GHz

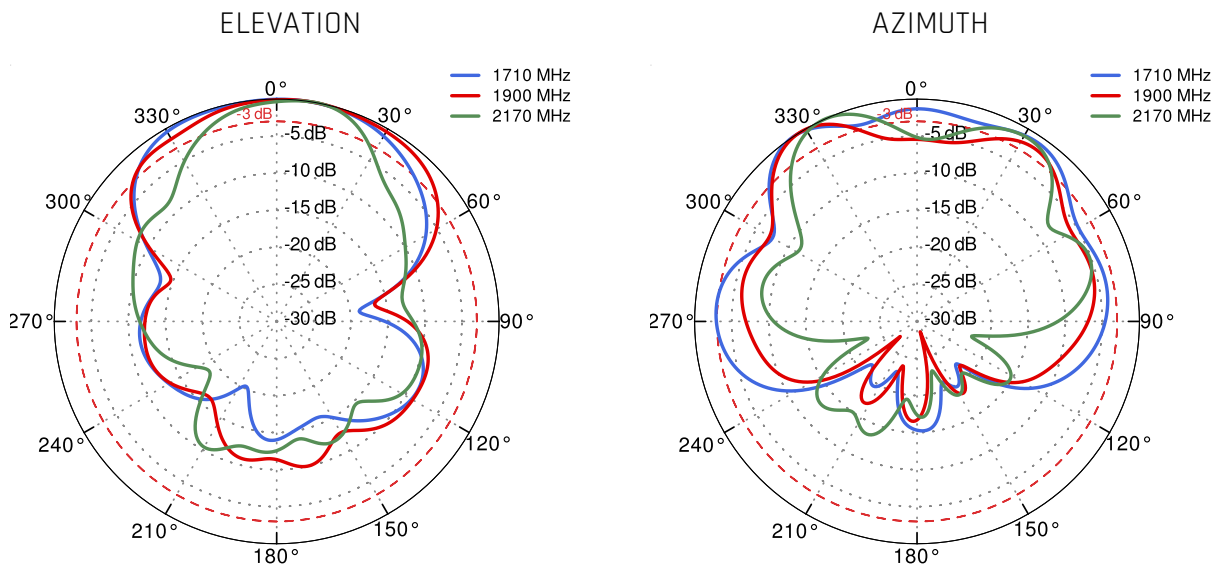


PORT 1&3 - 5G/LTE from 2.3GHz to 2.7GHz

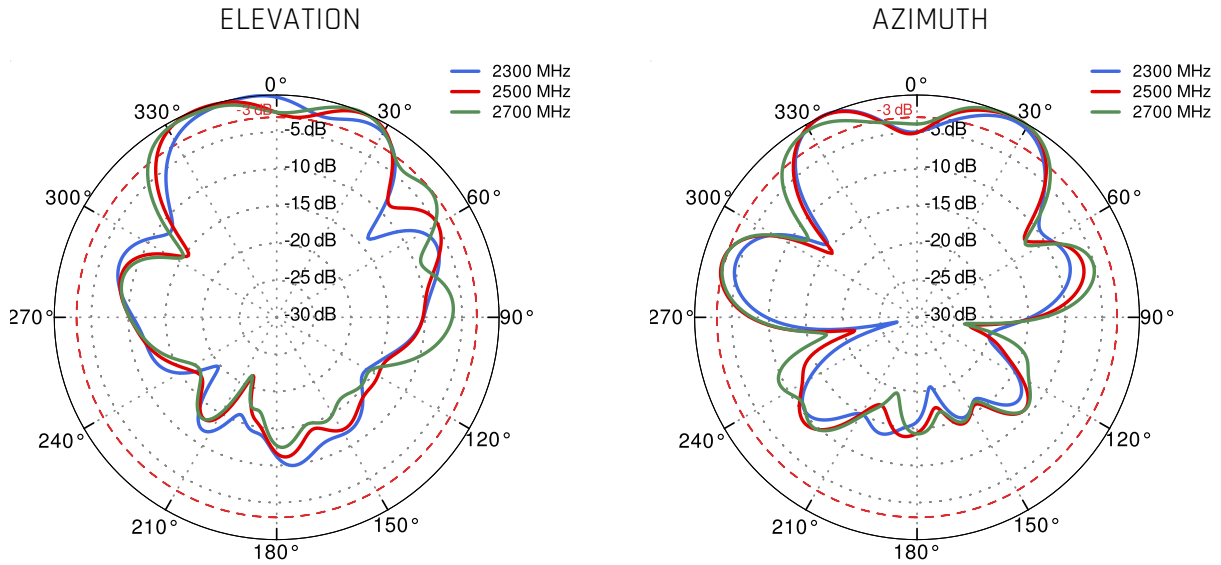


PORT 1&3 - 5G/LTE from 3.3GHz to 3.8GHz

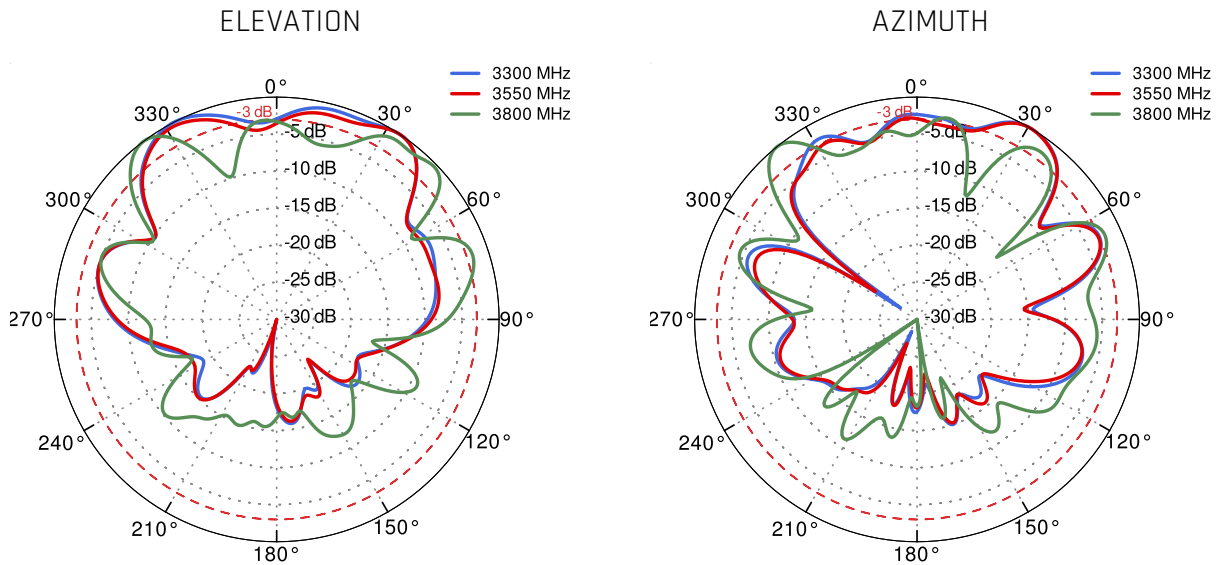


PORT 1&3 - 5G/LTE from 4.2GHz to 4.6GHz

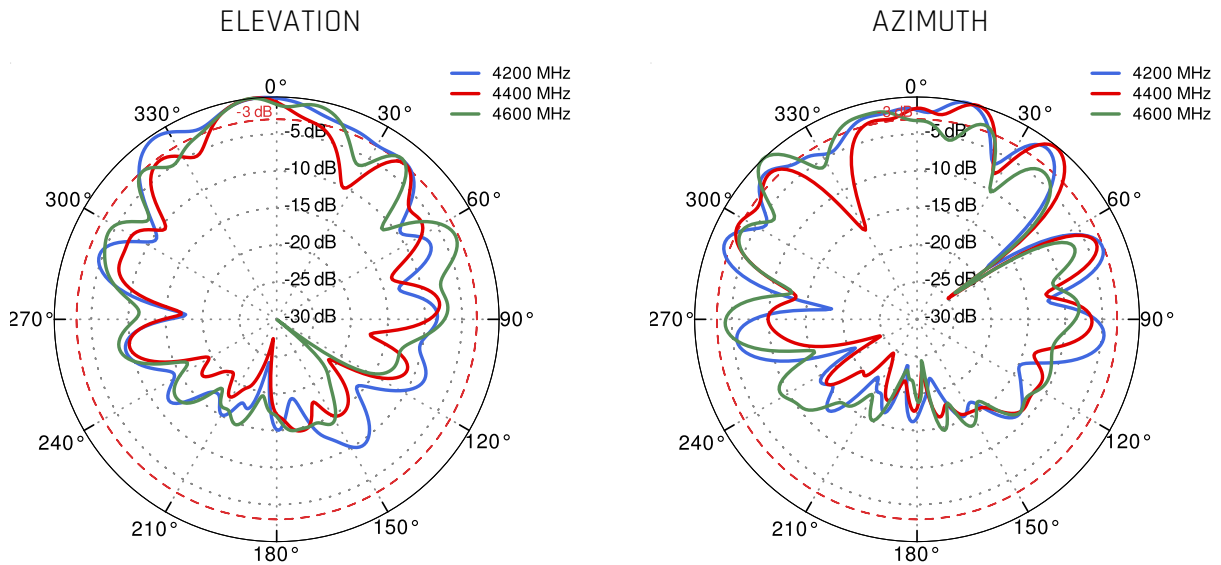


PORT 1&3 - 5G/LTE from 5.0GHz to 5.9GHz

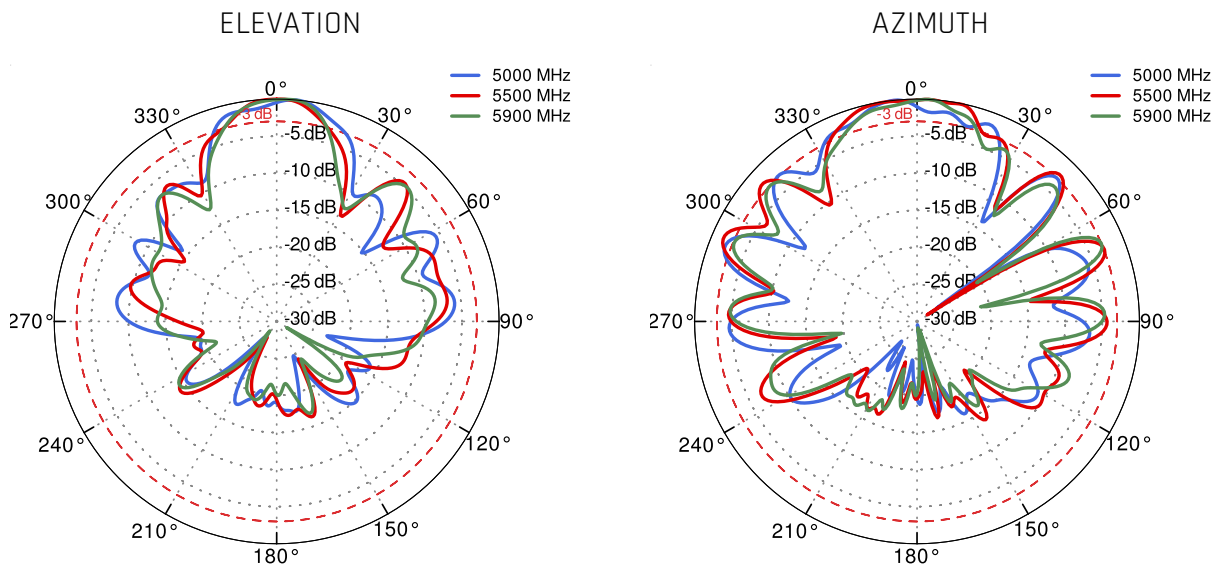


PORT 2&4 - 5G/LTE from 650MHz to 950MHz

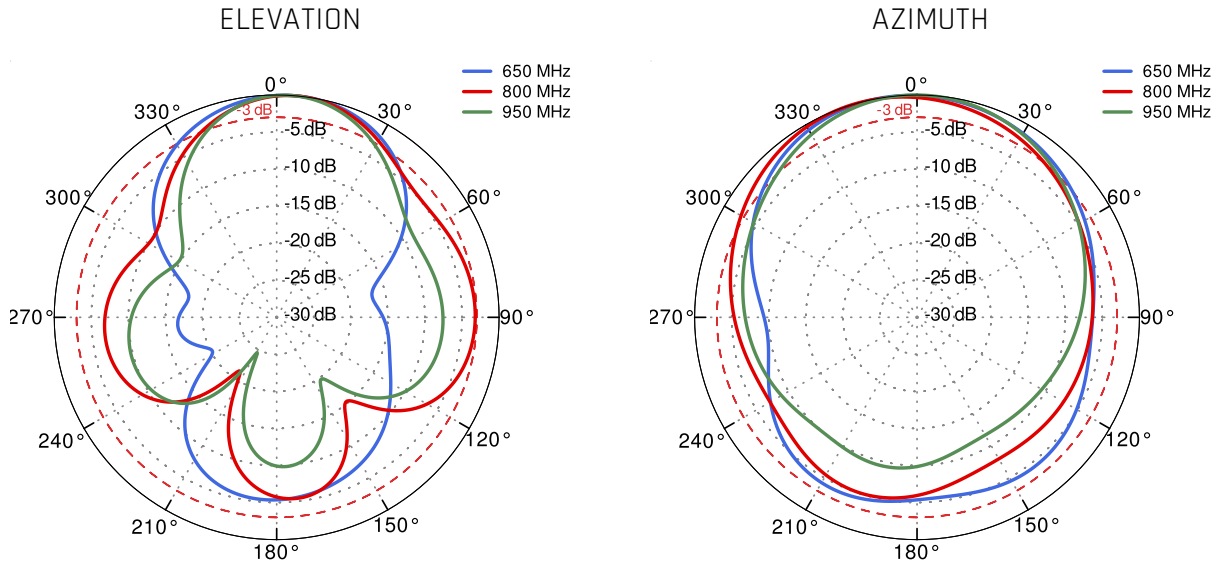


PORT 2&4 - 5G/LTE from 1.71GHz to 2.17GHz

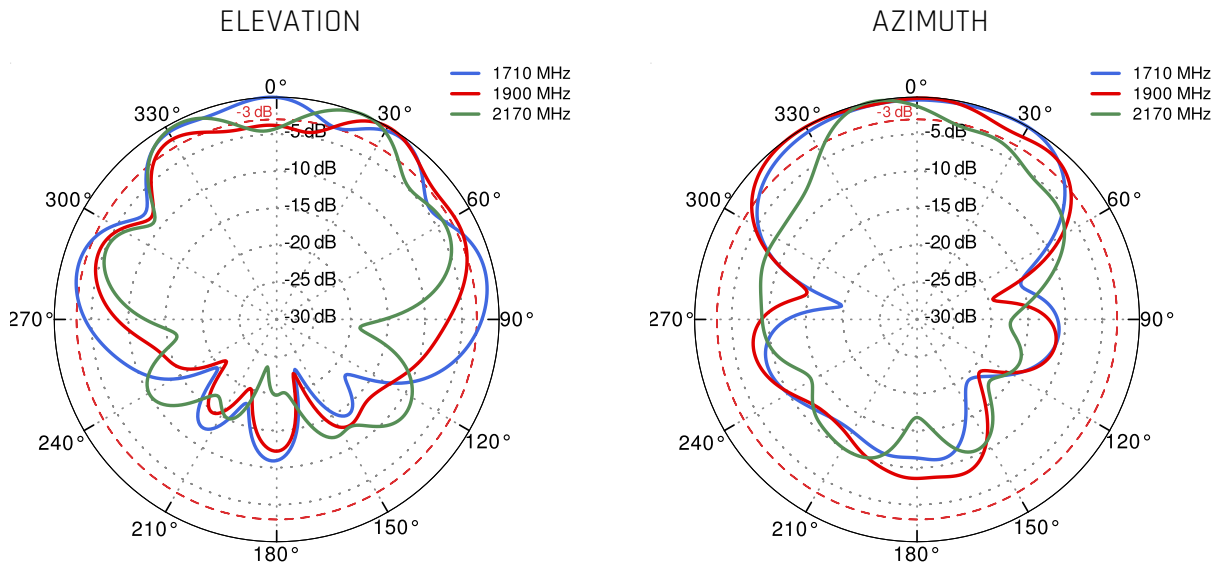


PORT 2&4 - 5G/LTE from 2.3GHz to 2.7GHz

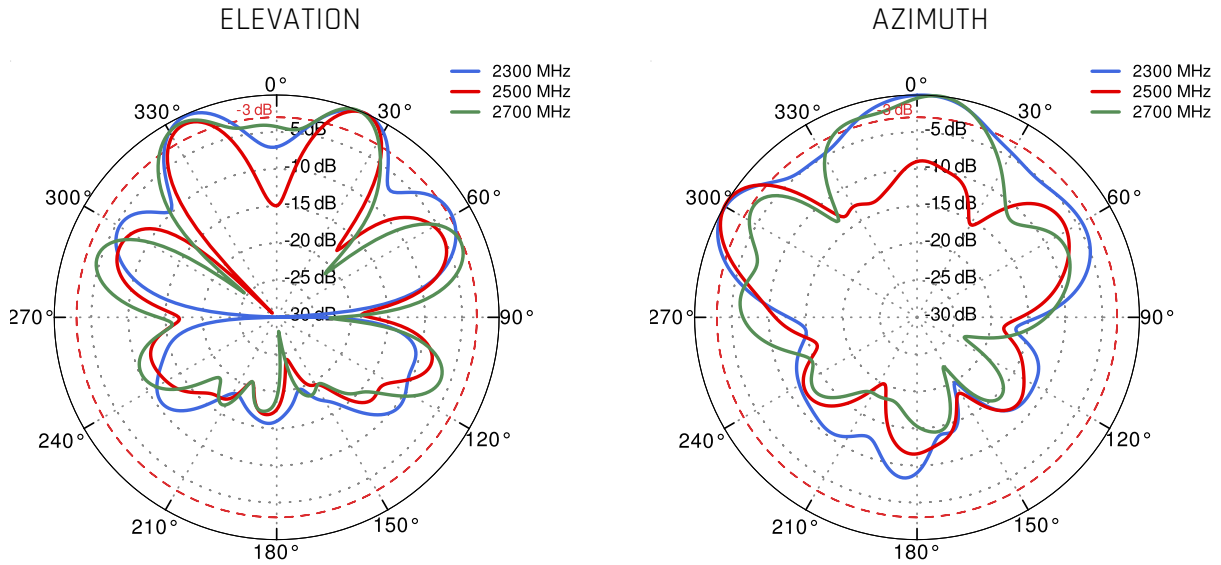


PORT 2&4 - 5G/LTE from 3.3GHz to 3.8GHz

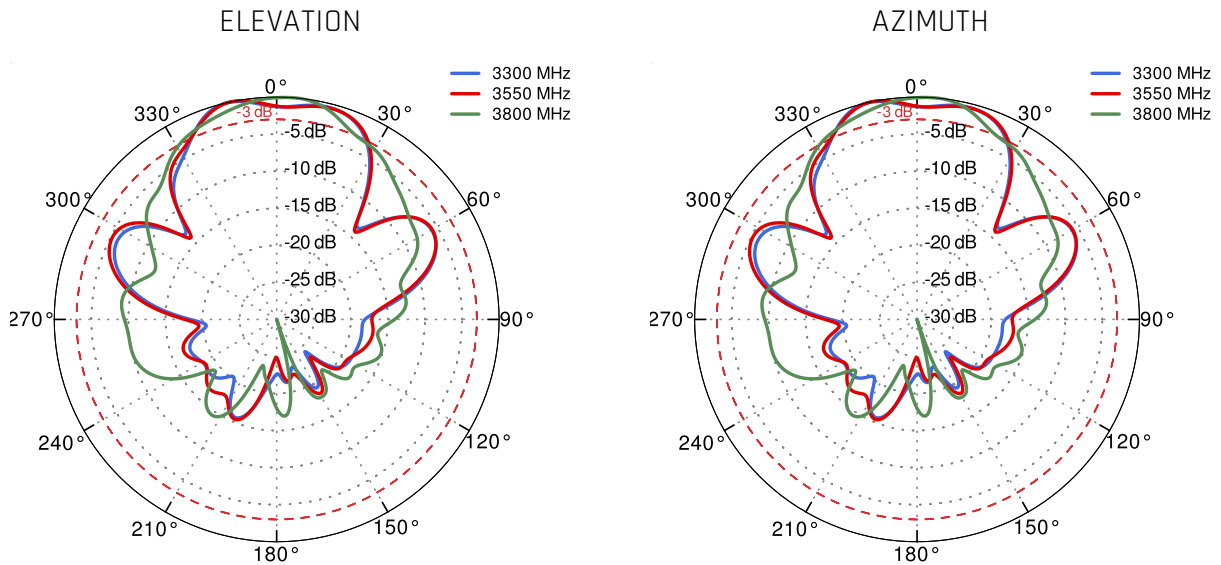


PORT 2 - 5G/LTE from 4.2GHz to 4.6GHz

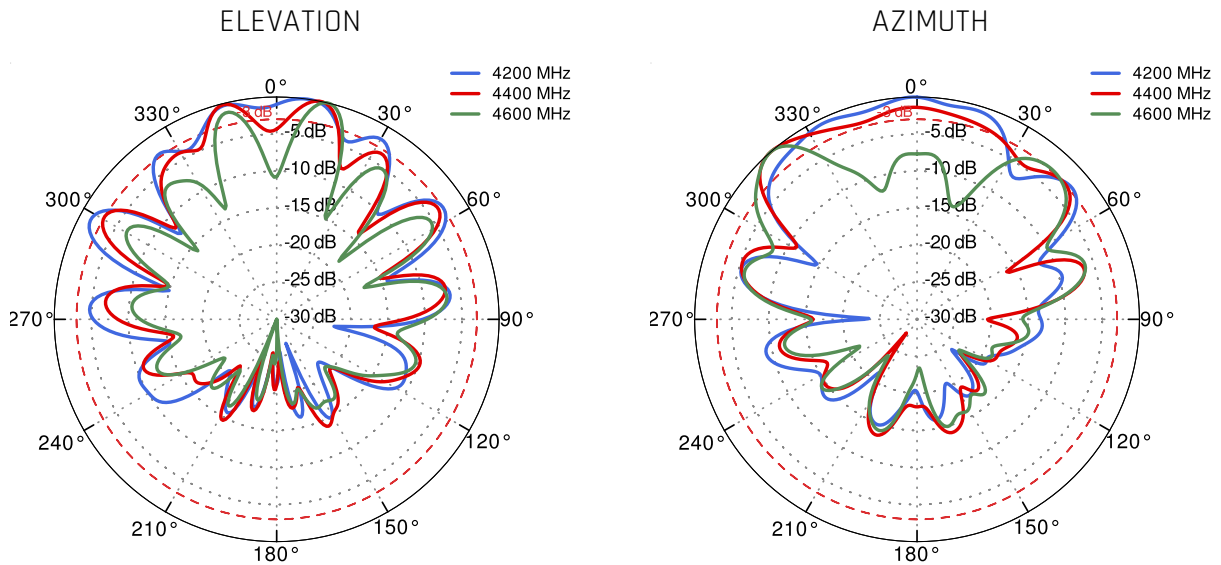

PORT 2 - 5G/LTE from 5.0GHz to 5.9GHz

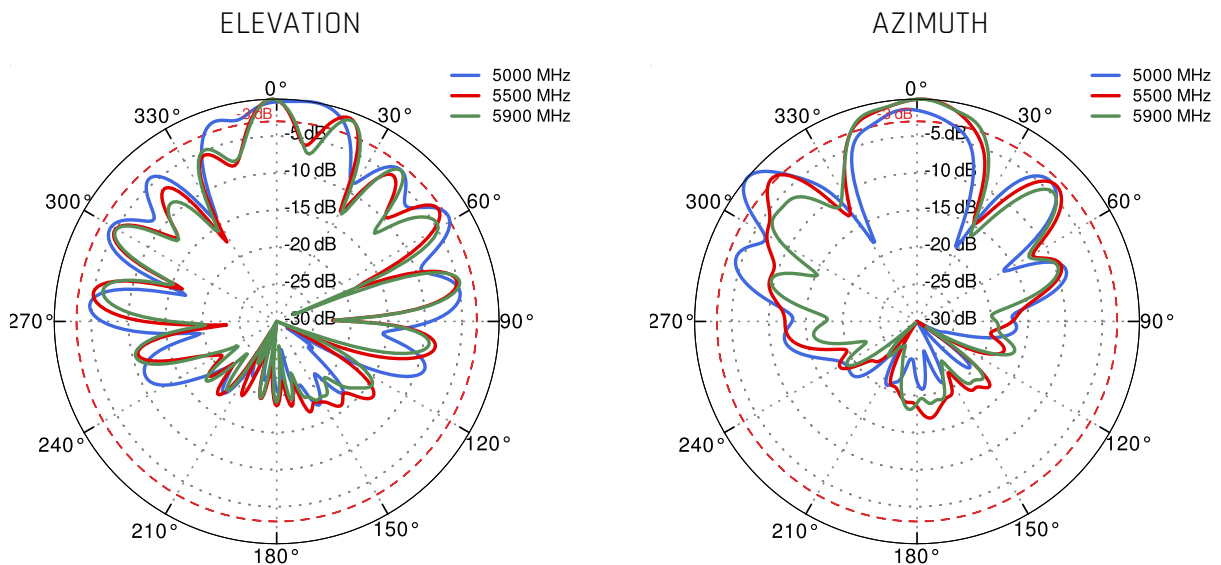

Wi-Fi 2.4GHz and 5GHz

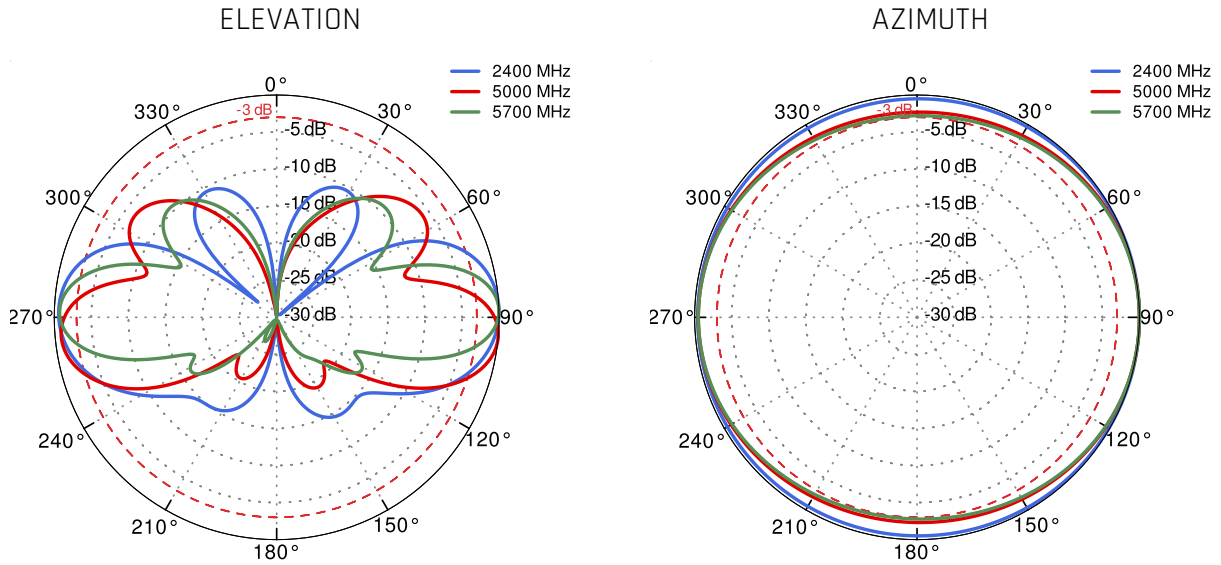

**DIMENSIONS**

