
QuMax for Teltonika RUTM59

INTEGRATED MULTI-BAND LTE & 5G PANEL ANTENNA + GPS + PLACE TO INSTALL TELTONIKA RUTM59 (ALL-IN-ONE)

QuMax for RUTM59 is a high performance directional antenna designed for use in a variety of wireless communication applications. This all-in-one product consists of multi-band 5G and GPS antennas integrated in IP68 enclosure. It offers 8 dBi gain and wide beamwidth, which makes it suitable for use in both urban and rural environments.
Combining QuMax with RUTM59 inside the antenna housing gives you complete outdoor solution with mulitple use scenarios such as transportation public, energy, mining IoT and more.

5G | BAND 71 | 617-6500MHz | 8 dBi | GPS | DIRECTIONAL | IP 68 | -40° TO +80°

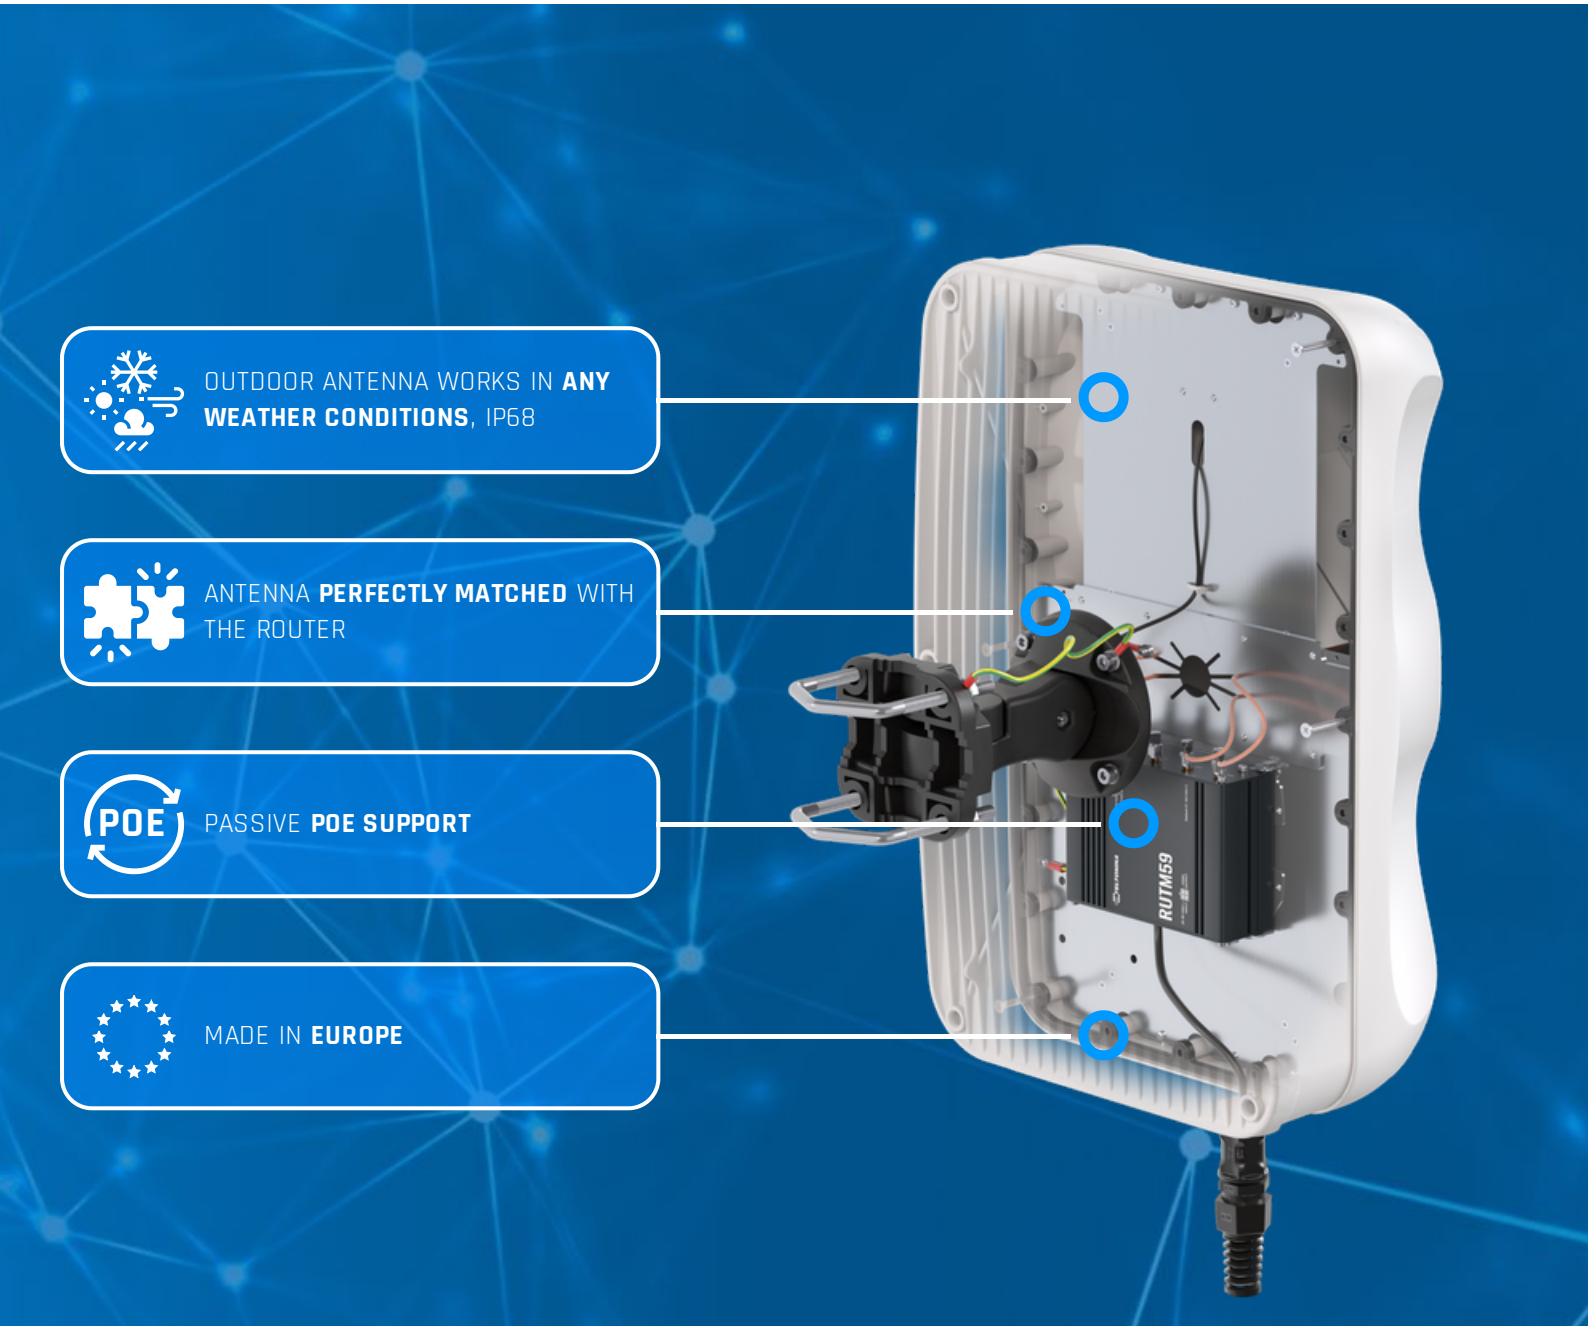

5G / LTE ANTENNA SPECIFICATION

FREQUENCY	0.617 - 1.0 GHz 1.0 - 3.08 GHz 3.3 - 5.0 GHz 5.0 - 6.5 GHz
MAX. GAIN	0.617 - 1.0 GHz : 6 dBi 1.0 - 3.08 GHz : 8 dBi 3.3 - 5.0 GHz : 6.8 dBi 5.0 - 6.5 GHz : 5.5 dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 65, 66, 67, 68, 69, 70, 71, 74, 75, 76, 85, 103, 106, 111, 252, 253, 254, 255, 256
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n24, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n50, n51, n53, n54, n65, n66, n67, n68, n70, n71, n74, n75, n76, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n91, n92, n93, n94, n95, n97, n98, n99, n100, n101, n102, n106, n109, n110, n250, n251, n252, n253, n254, n255, n256
VSWR	<2.00, max <3.00
BEAMWIDTH	80°/80° ±15°
POLARIZATION	X (+-45degrees)
IMPEDANCE	50 Ω

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.


MECHANICAL SPECIFICATION

RADOME MATERIAL	UV-resistant ASA
OPERATING HUMIDITY	up to 100% RH
MATERIALS	aluminum, PTFE, Fiberglass
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	486.0 x 292.2 x 105.6 mm 19.13 x 11.50 x 4.16 inch
WEIGHT	2.8 kg 6.17 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.6 - 0.8 Nm
MAST DIAMETER	25-66mm 0.98-2.60 inch


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PLOTS

VSWR for 5G/LTE antenna

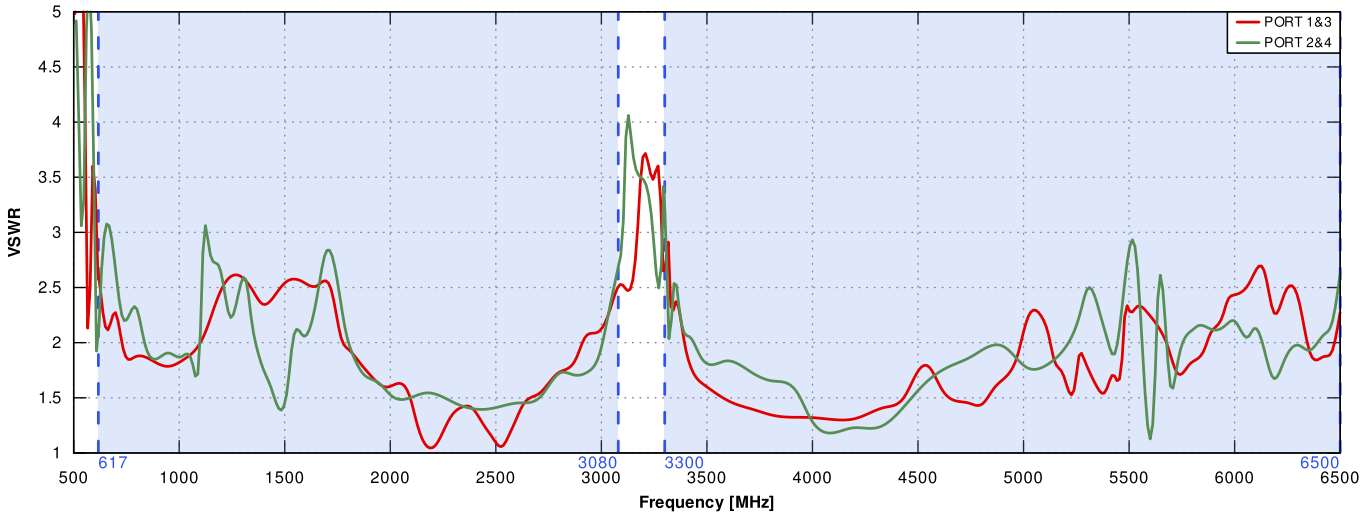


Gain for 5G/LTE antenna

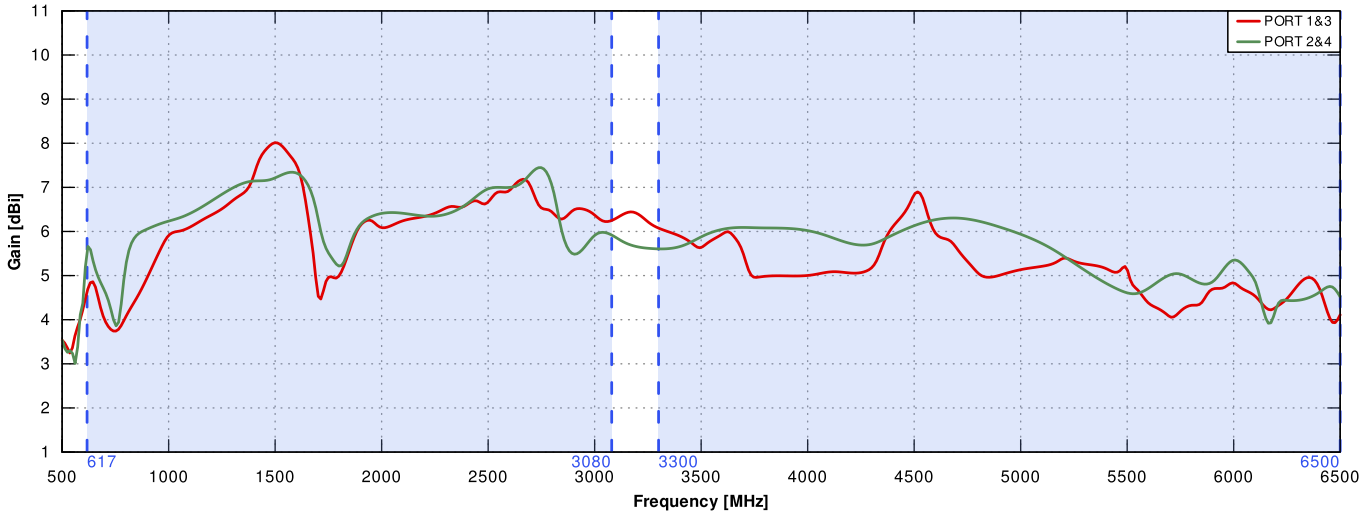


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PORT 1&3 - 5G/LTE from 650MHz to 950MHz

ELEVATION

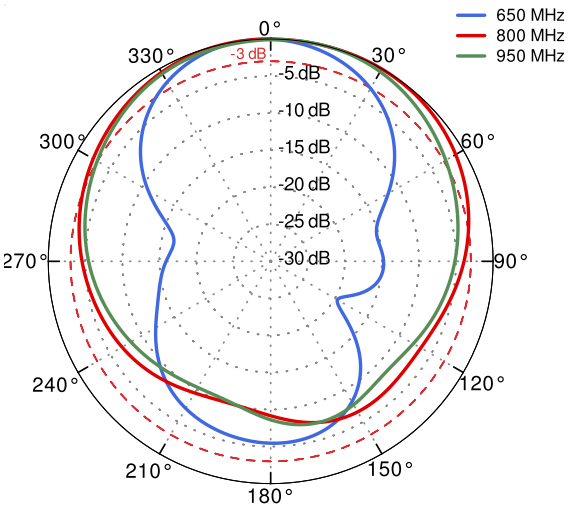


AZIMUTH

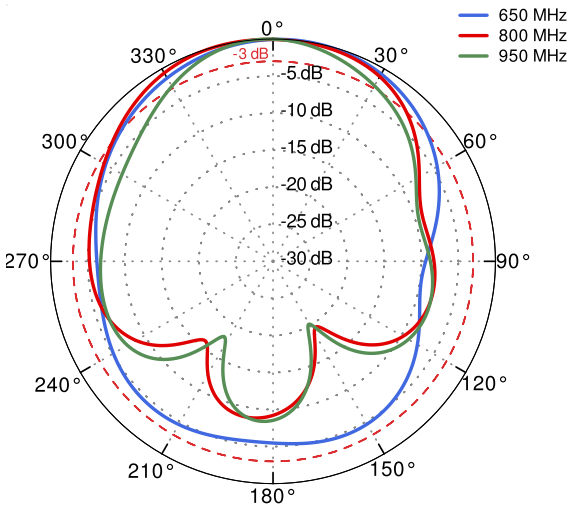


PORT 1&3 - 5G/LTE from 1.71GHz to 2.17GHz

ELEVATION

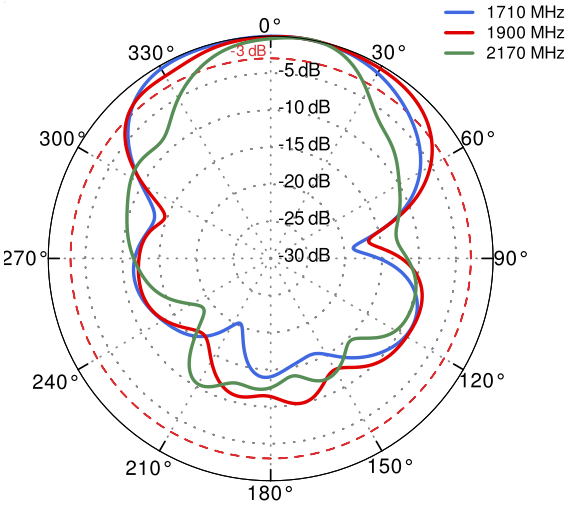


AZIMUTH

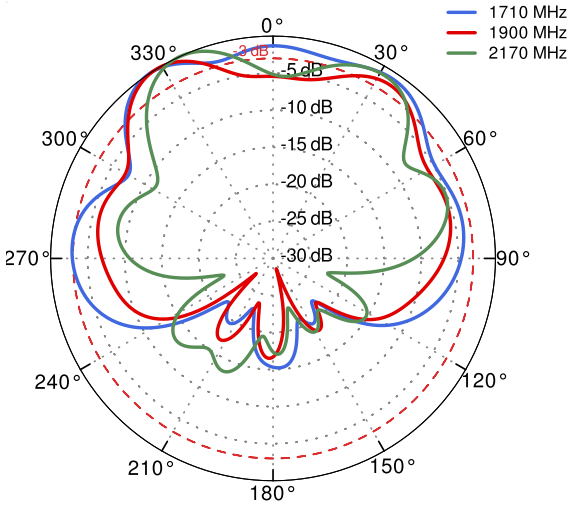


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PORT 1&3 - 5G/LTE from 2.3GHz to 2.7GHz

ELEVATION

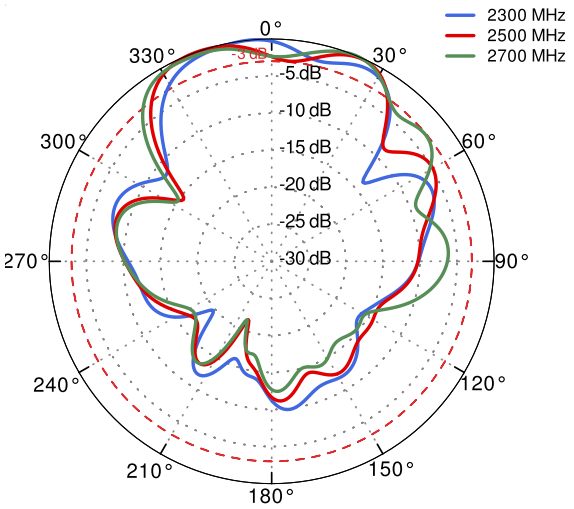


AZIMUTH

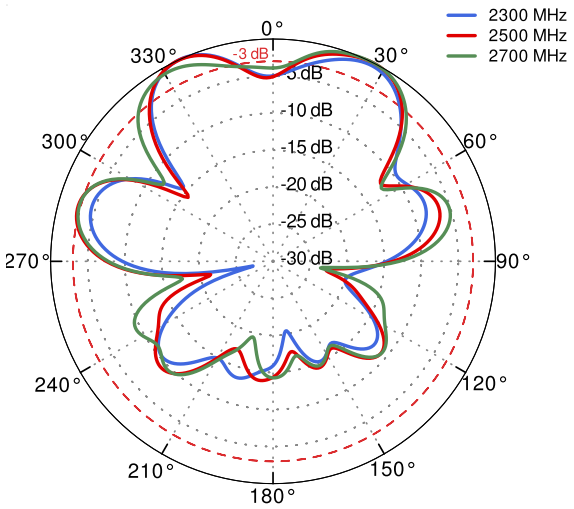


PORT 1&3 - 5G/LTE from 3.3GHz to 3.8GHz

ELEVATION

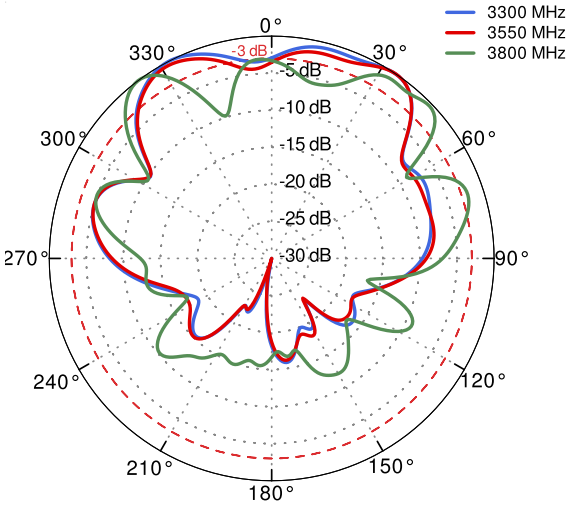


AZIMUTH

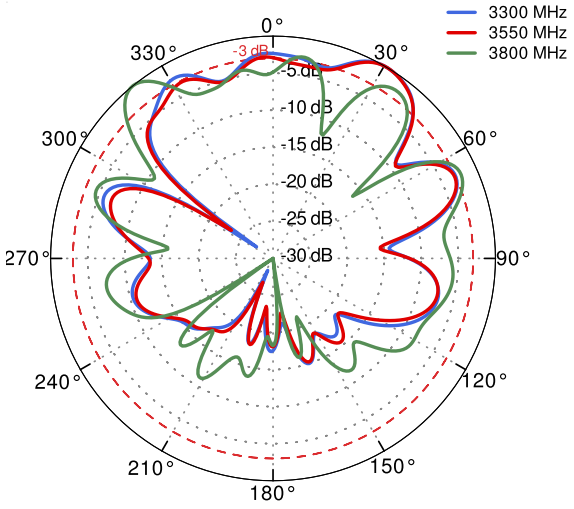


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PORT 1&3 - 5G/LTE from 4.2GHz to 4.6GHz

ELEVATION

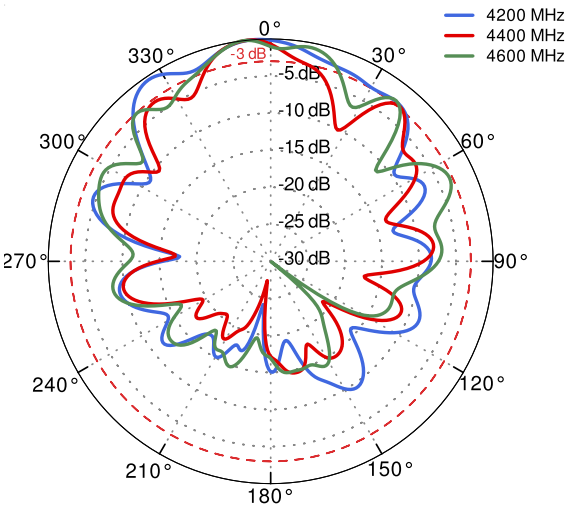


AZIMUTH

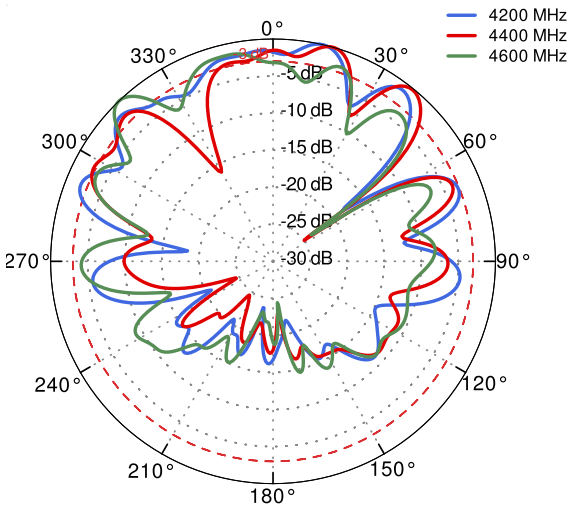


PORT 1&3 - 5G/LTE from 5.0GHz to 5.9GHz

ELEVATION

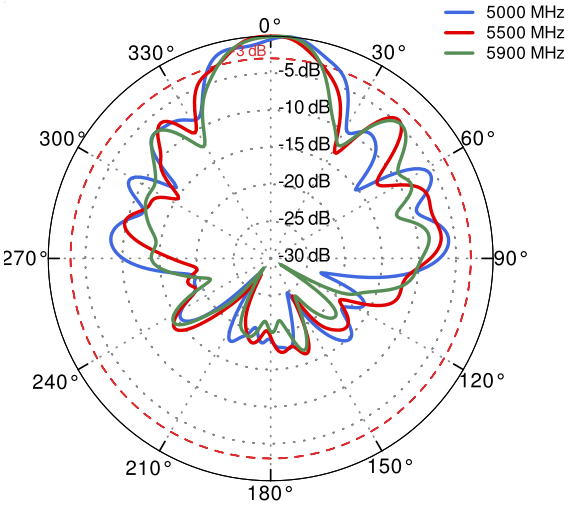


AZIMUTH

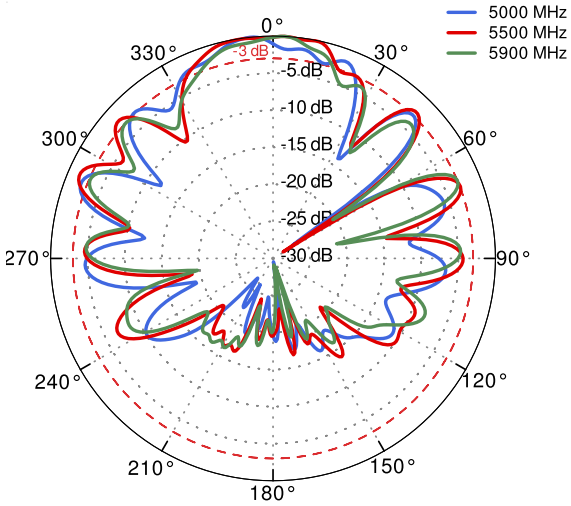


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PORT 2&4 - 5G/LTE from 650MHz to 950MHz

ELEVATION

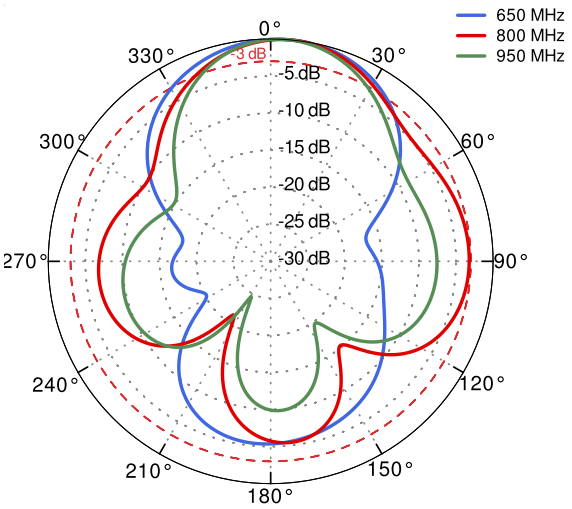


AZIMUTH

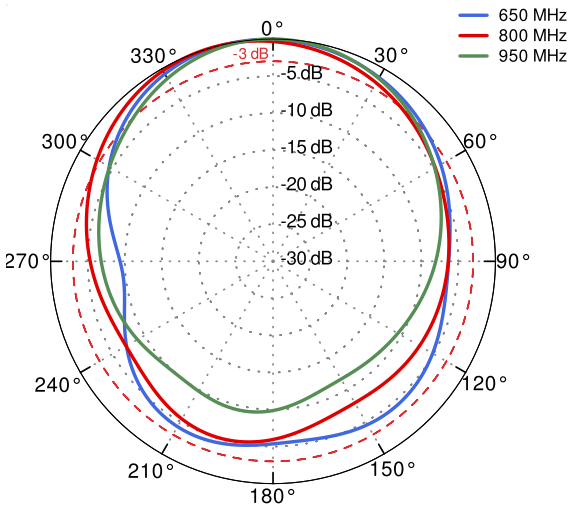


PORT 2&4 - 5G/LTE from 1.71GHz to 2.17GHz

ELEVATION

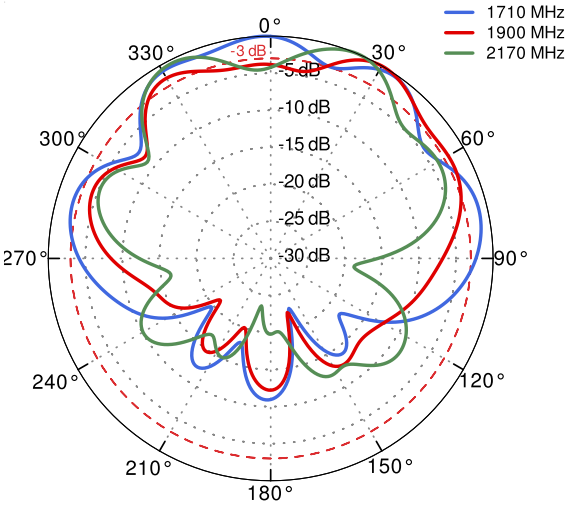


AZIMUTH

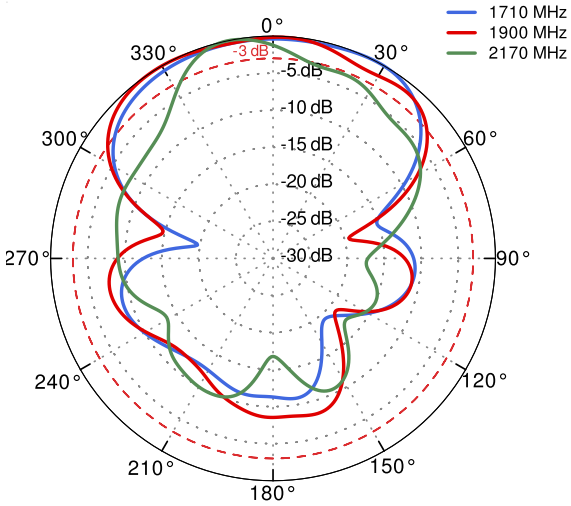


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PORT 2&4 - 5G/LTE from 2.3GHz to 2.7GHz

ELEVATION

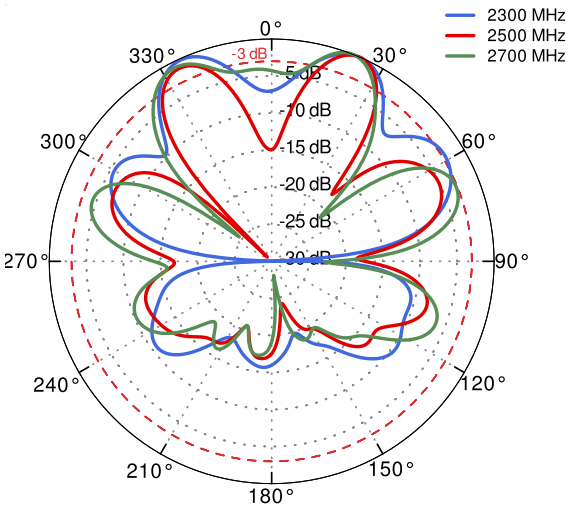


AZIMUTH

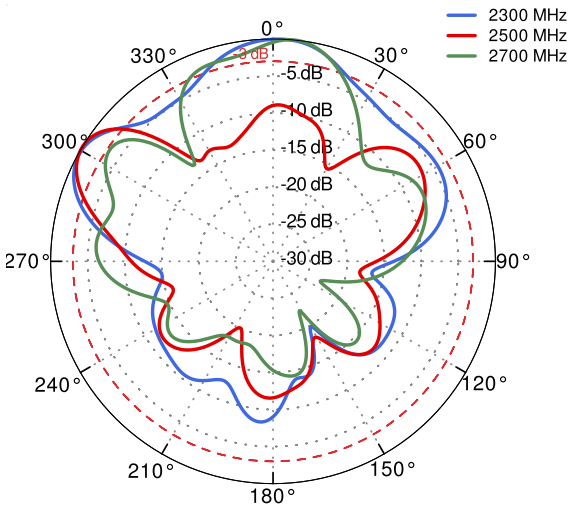


PORT 2&4 - 5G/LTE from 3.3GHz to 3.8GHz

ELEVATION

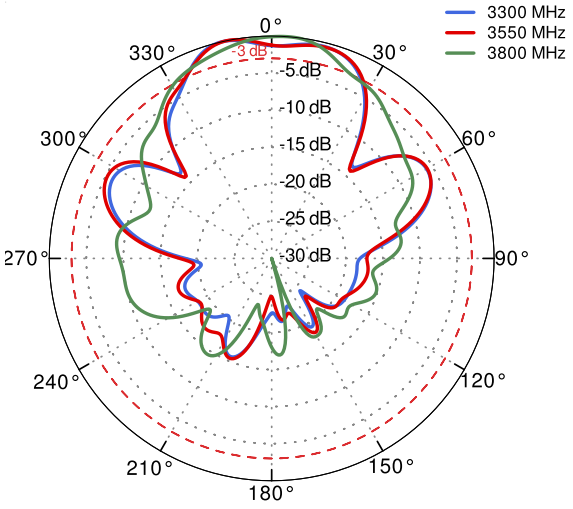


AZIMUTH

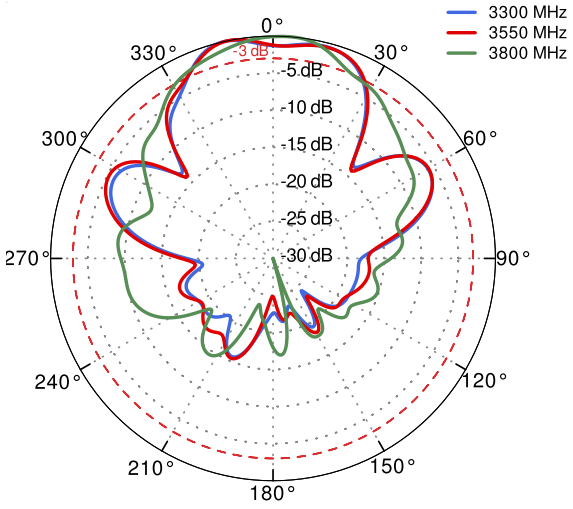


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PORT 2 - 5G/LTE from 4.2GHz to 4.6GHz

ELEVATION

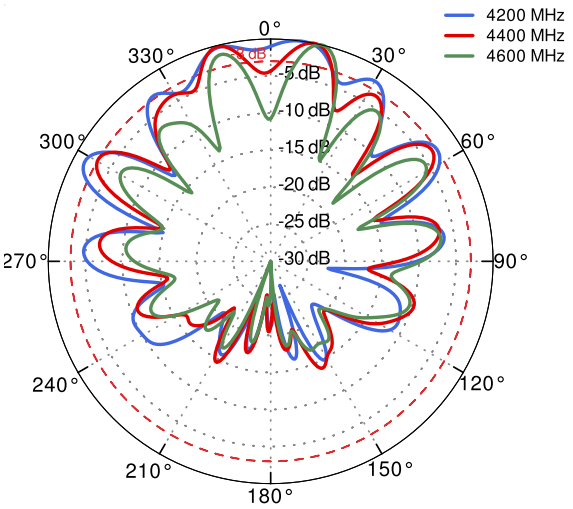


AZIMUTH

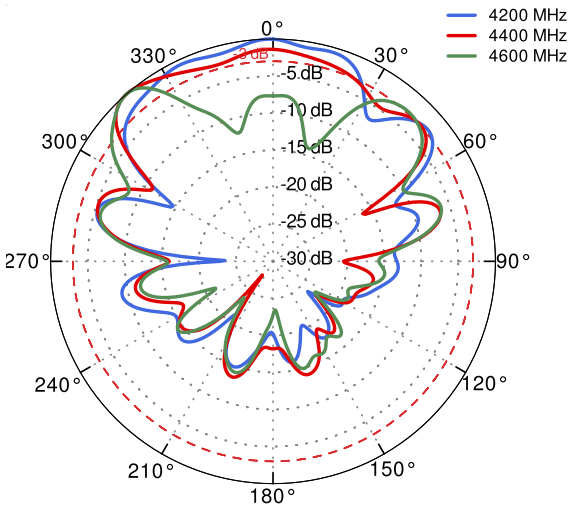


PORT 2 - 5G/LTE from 5.0GHz to 5.9GHz

ELEVATION

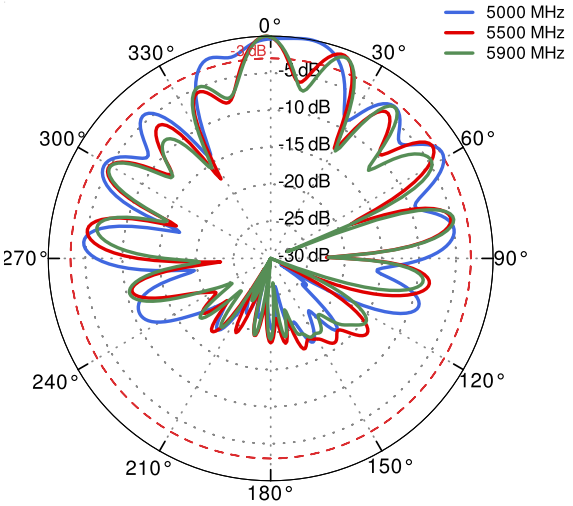



AZIMUTH

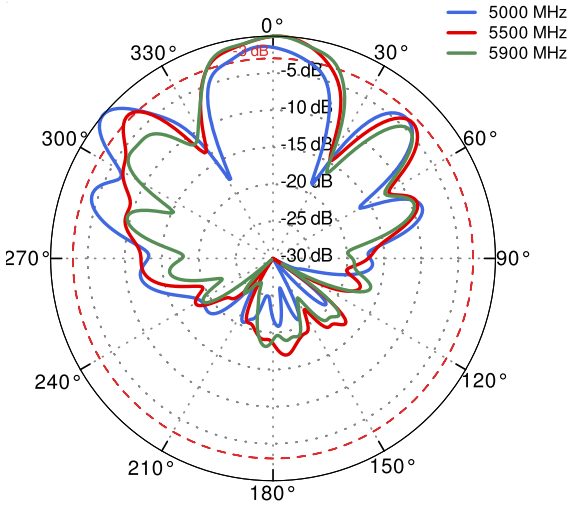


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

DIMENSIONS

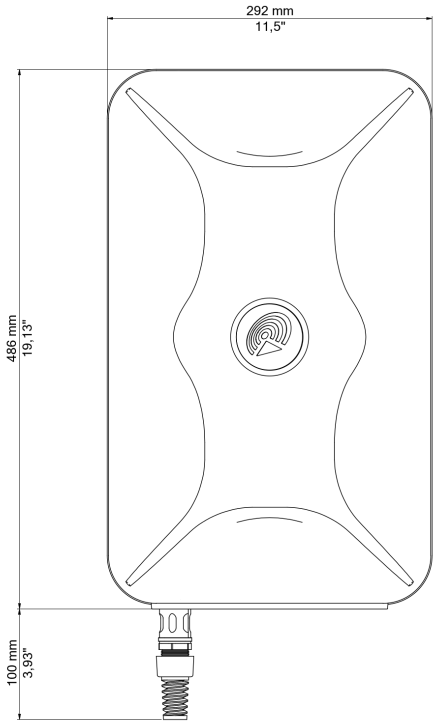

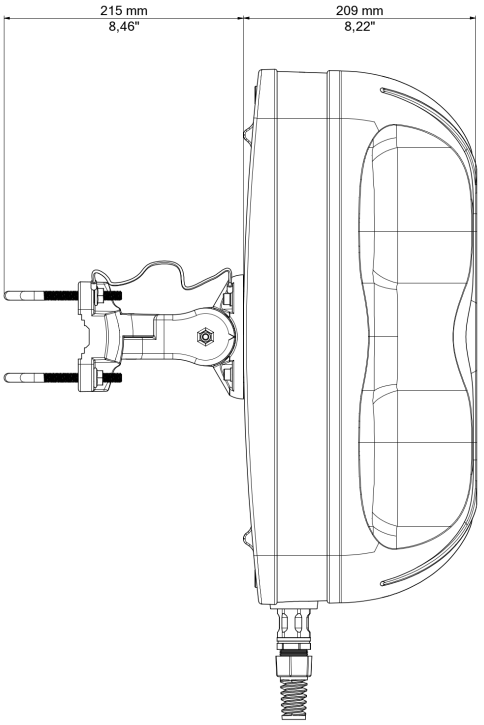

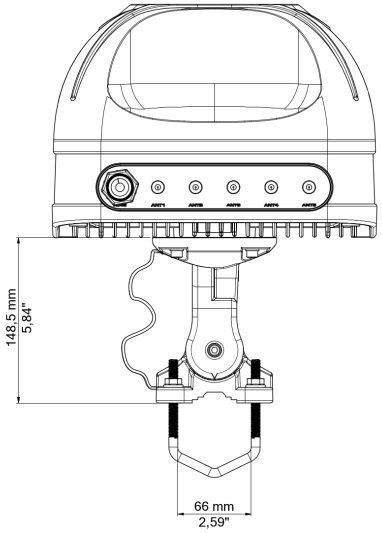

QuWireless
WWW.QUWIRELESS.COM
Sales email: sales@quwireless.com **Tel:** +48 513 900 416
Support email: support@quwireless.com **Website:** www.quwireless.com
Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.