

QuMax for Milesight UR41

Integrated outdoor LTE high power directional antenna + GPS antenna + Passive PoE Splitter + place to install Milesight UR41 (All-in-one)

QuMAX offers the most powerful directional LTE antenna of all QuWireless antennas. It is dedicated to connections with long distance to base station. It is designed to have **Milesight UR41** router installed inside IP67 enclosure. It is the first choice for fixed installations in industrial environment. It also has embedded GPS antenna. The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.



ALL ANTENNAS AND MILESIGHT ROUTER INTEGRATED **IN ONE ENCLOSURE**



OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP67



ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER



MADE IN **EUROPE**



LTE ANTENNA SPECIFICATION

FREQUENCY	0.694 - 0.96 GHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n85, n89, n90, n95, n97, n98, n100, n101, n256
GAIN	0.694 - 0.96 GHz : 4 dBi 1.7 - 2.2 GHz : 5 dBi 2.2 - 2.7 GHz : 6 dBi
FRONT-TO-BACK	>8 dB
VSWR	<1.30, max <1.80
BEAMWIDTH	90°/90° ±30°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION


MATERIALS	ABS, aluminum, PTFE, Fiberglass
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.6 - 0.8 Nm
MAST DIAMETER	25-66mm 0.98-2.60 inch

FREQUENCY BANDS


LTE/4G GSM	<table border="1"> <tbody> <tr> <td rowspan="4">694 MHz</td> <td>5</td> <td>8</td> <td>12</td> <td>13</td> <td>14</td> <td>17</td> <td>18</td> <td rowspan="4">960M Hz</td> </tr> <tr> <td>19</td> <td>20</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> <td>44</td> </tr> <tr> <td>67</td> <td>68</td> <td>85</td> <td>103</td> <td>n81</td> <td>n82</td> <td>n83</td> </tr> <tr> <td>n89</td> <td>n100</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	694 MHz	5	8	12	13	14	17	18	960M Hz	19	20	26	27	28	29	44	67	68	85	103	n81	n82	n83	n89	n100					
694 MHz	5		8	12	13	14	17	18	960M Hz																						
	19		20	26	27	28	29	44																							
	67		68	85	103	n81	n82	n83																							
	n89	n100																													
LTE/4G UMTS	<table border="1"> <tbody> <tr> <td rowspan="3">1710 MHz</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>9</td> <td>10</td> <td>25</td> <td rowspan="3">2170 MHz</td> </tr> <tr> <td>33</td> <td>34</td> <td>35</td> <td>36</td> <td>37</td> <td>39</td> <td>n80</td> </tr> <tr> <td>n84</td> <td>n86</td> <td>n95</td> <td>n98</td> <td>n101</td> <td></td> <td></td> </tr> </tbody> </table>	1710 MHz	1	2	3	4	9	10	25	2170 MHz	33	34	35	36	37	39	n80	n84	n86	n95	n98	n101									
1710 MHz	1		2	3	4	9	10	25	2170 MHz																						
	33		34	35	36	37	39	n80																							
	n84	n86	n95	n98	n101																										
LTE/4G WCS DARS	<table border="1"> <tbody> <tr> <td>2300 MHz</td> <td>30</td> <td>40</td> <td>n97</td> <td></td> <td></td> <td></td> <td></td> <td>2400 MHz</td> </tr> </tbody> </table>	2300 MHz	30	40	n97					2400 MHz																					
2300 MHz	30	40	n97					2400 MHz																							
LTE/4G	<table border="1"> <tbody> <tr> <td>2400 MHz</td> <td>7</td> <td>38</td> <td>41</td> <td>53</td> <td>69</td> <td>n90</td> <td></td> <td>2700 MHz</td> </tr> </tbody> </table>	2400 MHz	7	38	41	53	69	n90		2700 MHz																					
2400 MHz	7	38	41	53	69	n90		2700 MHz																							

PLOTS


VSWR for LTE antenna

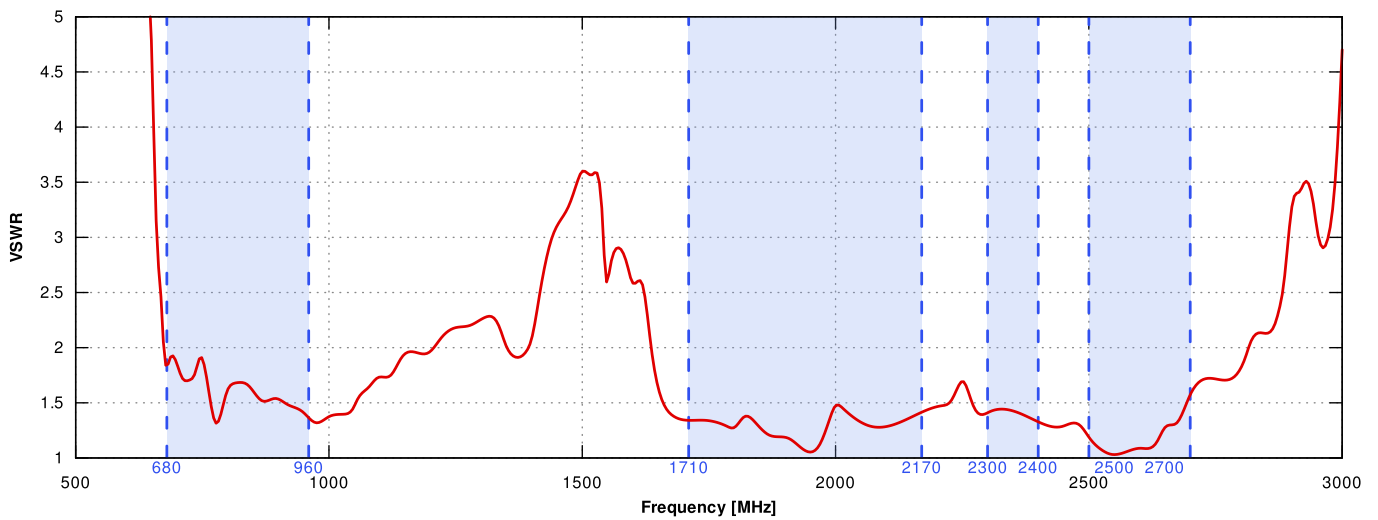


Gain for LTE antenna

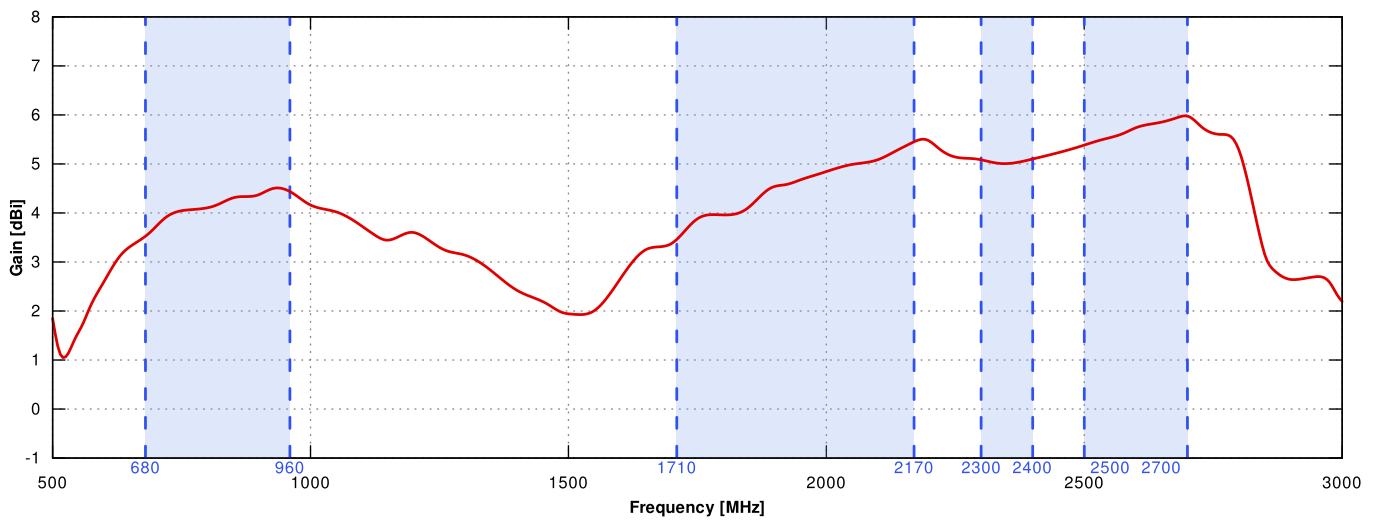


LTE from 700MHz to 900MHz

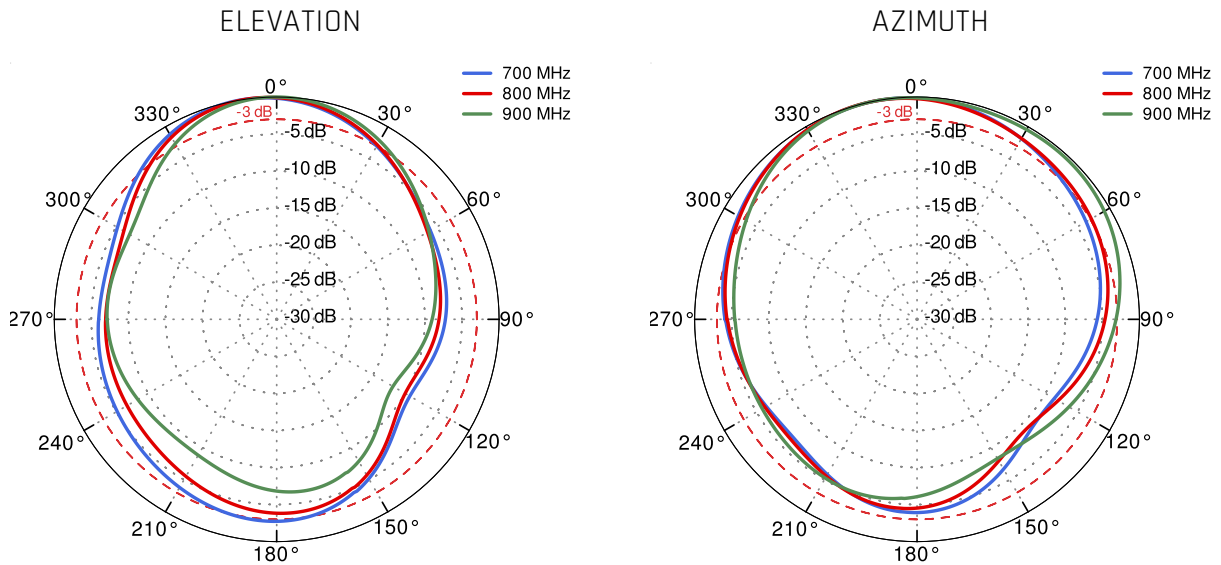

LTE from 1.71GHz to 2.17GHz

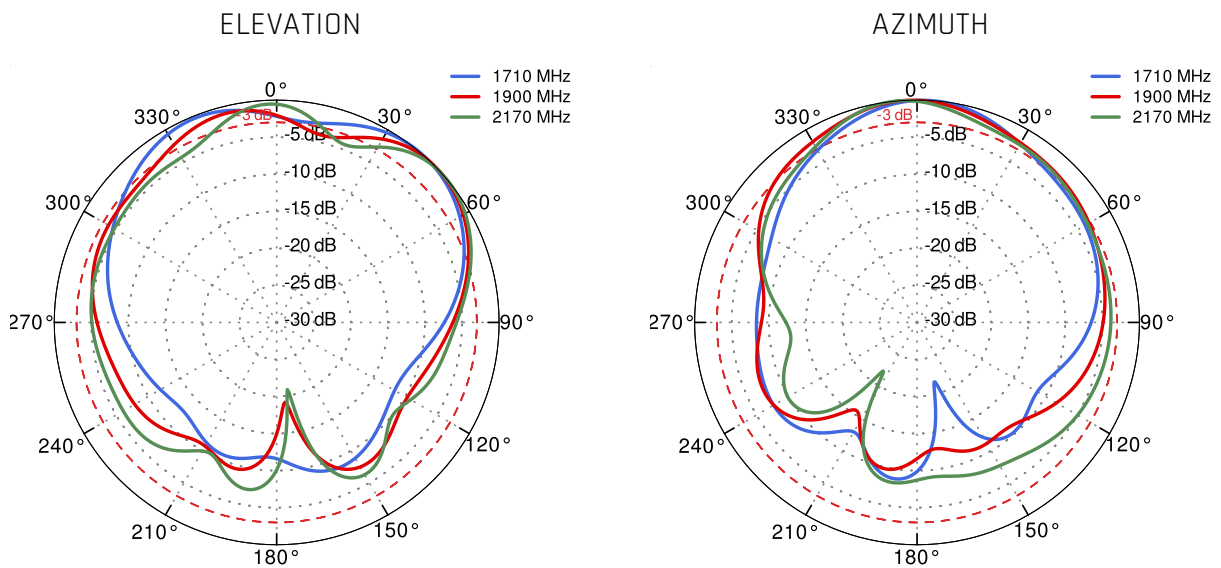

LTE from 2.3GHz to 2.7GHz

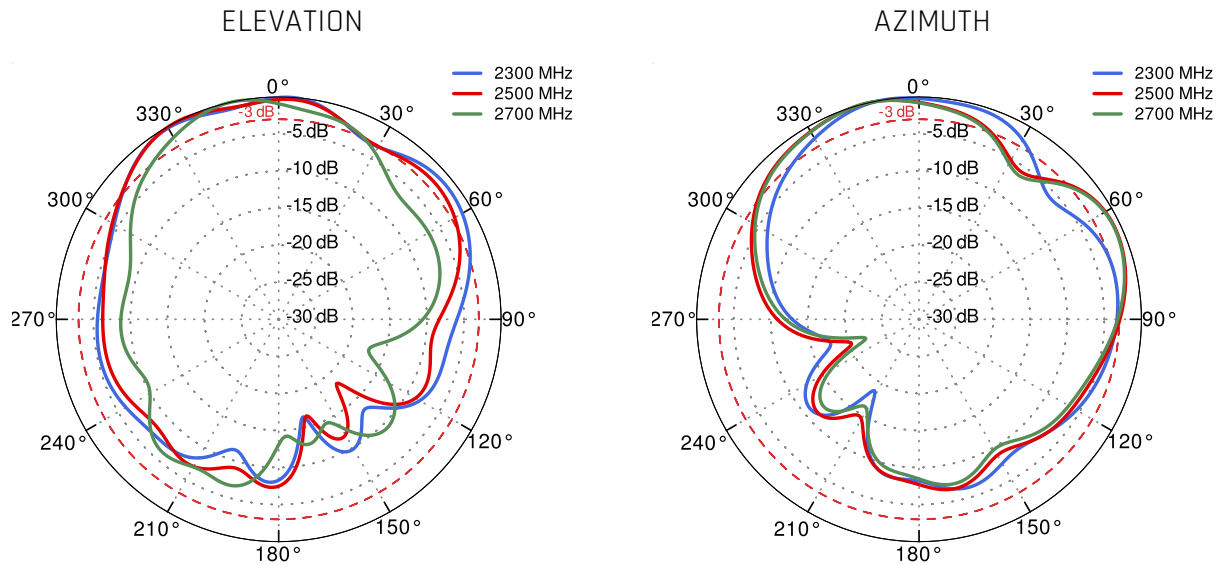

DIMENSIONS

