
QuOmni 5G/LTE Global MIMO 4x4

Omnidirectional ultra wideband 5G/LTE MIMO 4x4 antenna

QuOmni 5G/LTE omnidirectional MIMO 4x4 is ultra wideband LTE Outdoor antenna. It´s primary designed for LTE/5G/3G/2G devices which require high efficiency connections. The antenna covers many LTE bands including the new Extended LTE Band 71, frequencies: **617 - 6000MHz**. The mounting bracket allows the antenna to be installed on the buildings (on the pole or on the wall) as the client antenna or on the moving points like trains, buses, lorries, yachts, boats to receive Internet by LTE/5G/3G/2G. It's ideal solution to use with all industrial and domestic 4x4 LTE modems and routers like: Teltonika, DIGI, Mikrotik, Robustel, Cisco, etc.





5G / LTE ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 GHz : 2.5dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

MECHANICAL SPECIFICATION

MATERIALS	ASA, aluminum, PTFE
CONNECTOR TYPE	SMA
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
MAST DIAMETER	25-66 mm 0.98-2.60 inch

FREQUENCY BANDS

LTE / 4G	617 MHz	1	2	3	4	5	7	8	6000 MHz
		9	10	12	13	14	17	18	
		19	20	22	25	26	27	28	
		29	30	33	34	35	36	37	
		38	39	40	41	42	43	44	
		47	48	49	52	53	65	66	
		67	68	69	71	85	103	106	

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

5G	617 MHz	n1 n2 n3 n5 n7 n8 n12 n13 n14 n18 n20 n25 n26 n28 n29 n30 n34 n38 n39 n40 n41 n47 n48 n53 n65 n66 n67 n71 n77 n78 n80 n81 n82 n83 n84 n85 n86 n89 n90 n95 n97 n98 n100 n101 n256
		6000 MHz

COMPATIBLE ROUTERS

VARIANTS: AO5G4-G, AO5G4-G1

TELTONIKA	CALYX, RUTC42, RUTC50, RUTC54, RUTM30, RUTM31, RUTM51, RUTM54, RUTM55, RUTM56, RUTM59, RUTX12, RUTX14, RUTX50, TRB500, TRB501
ROBUSTEL	EG5120, EG5200, R2000, R2120 5G, R5010, R5020, R5020 Lite, R5030
CISCO	CG418-E, CG522-E
COMSET	CM550W, CM580W, CM685VX, CM770W-6, CM950W
CUDY	P5
DIGI	EX50, IX25, IX40, TX54 LTE-Advanced, TX64
ERICSSON (CRADLEPOINT)	E300, E3000, IBR1700, R1900, R2400, R980, W1850, W4005
FORTINET	FEX-311F, FEX-311F


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

FOUR-FAITH	5G Industrial CPE F-NR200, 5G Industrial Router F-NR100, 5G SIM WiFi Router F-NR120, 5G Smart Light Pole Gateway F-G300, 5G WiFi Router with SIM Card Slot F-NR130, Smart Light Pole Gateway F-G310
MILESIGHT	UF31, UR75
PEPLINK	Balance 310 5G, Balance 310 fiber 5G, BR1 Mini 5G, BR1 Pro (CAT-20), BR1 Pro CAT-20, BR2 PRO, MAX BR1 Pro 5G, MAX HD2, MAX HD2 Mini, MAX Transit, MAX Transit Duo Pro, UBR Plus
PERLE	IRG7440
PROROUTE	H685 WRT M2M 5G Router, H900 5G Router
ROBUSTEL	EG5120, EG5200, R2000, R2120 5G, R5010, R5020, R5020 Lite, R5030
SEMTECH (SIERRA WIRELESS)	AirLink MG90 5G, AirLink XR60
SIEMENS	6GK5853-2EA00-2DA1
TELTONIKA	CALYX, RUTC42, RUTC50, RUTC54, RUTM30, RUTM31, RUTM51, RUTM54, RUTM55, RUTM56, RUTM59, RUTX12, RUTX14, RUTX50, TRB500, TRB501
WAVETEL	W4600-NR 5G, W4A00 5G, WNR320 5G, WNR340 5G
WLINK	G230, G530, G530
ZYXEL	Nebula FWA510
OTHER	4 * SMA


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PLOTS

VSWR

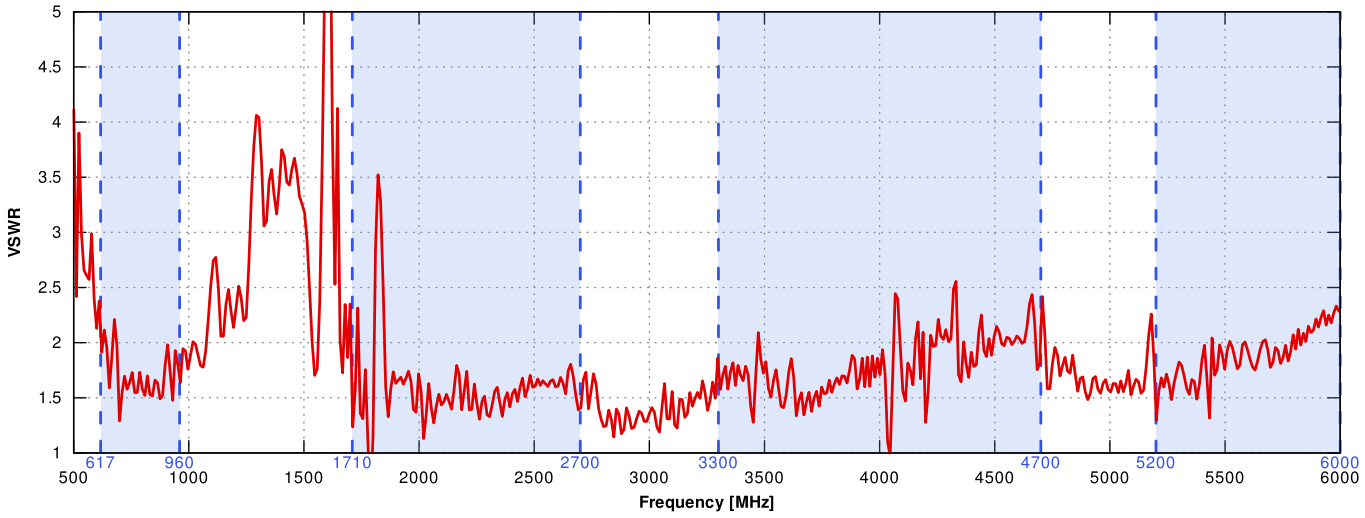


Gain

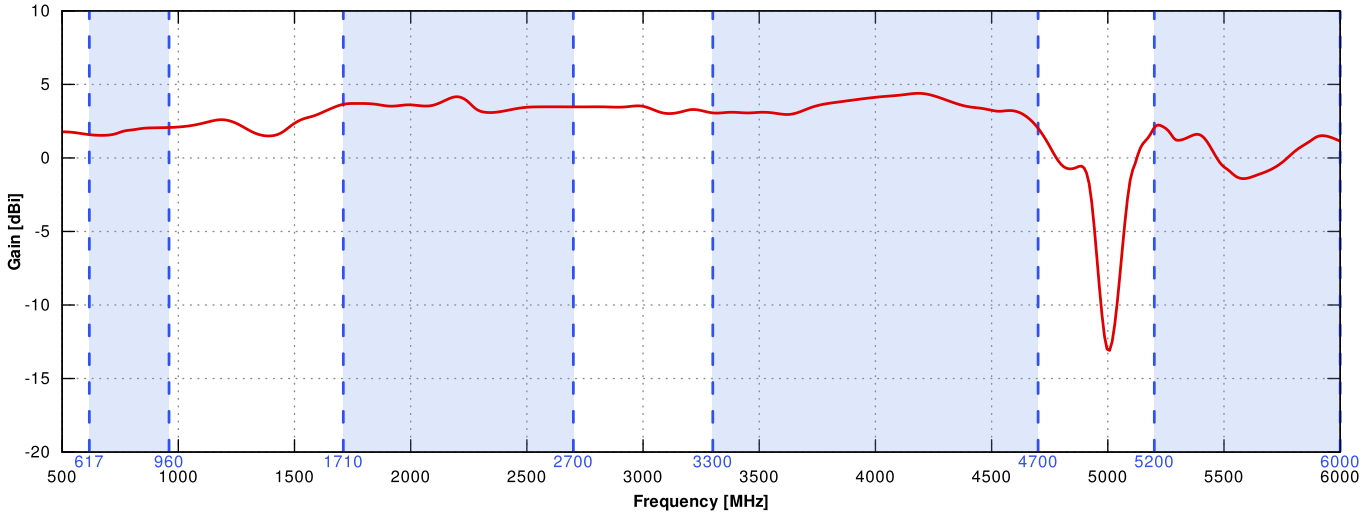


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

From 650MHz to 950MHz

ELEVATION

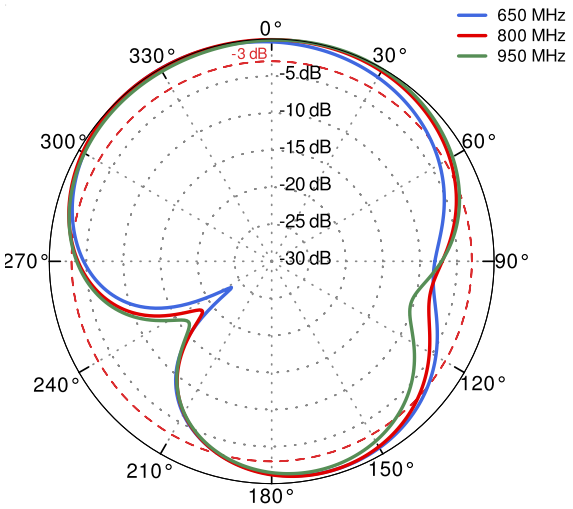


AZIMUTH

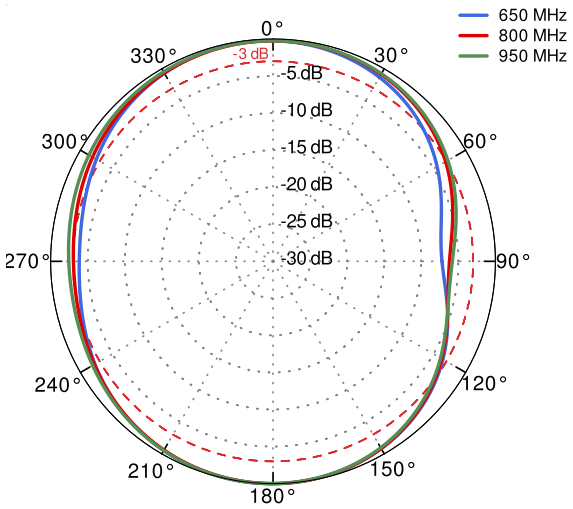


From 1.71GHz to 2.5GHz

ELEVATION

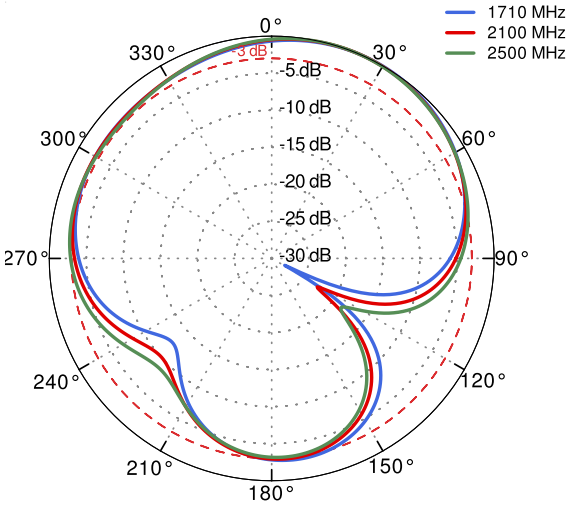


AZIMUTH

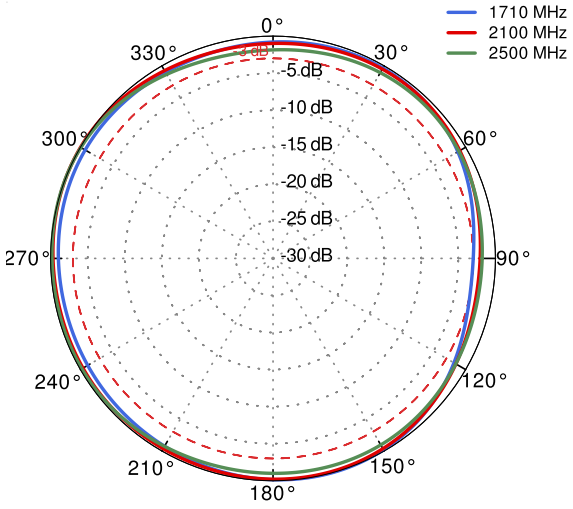


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

From 3.3GHz to 4.0GHz

ELEVATION

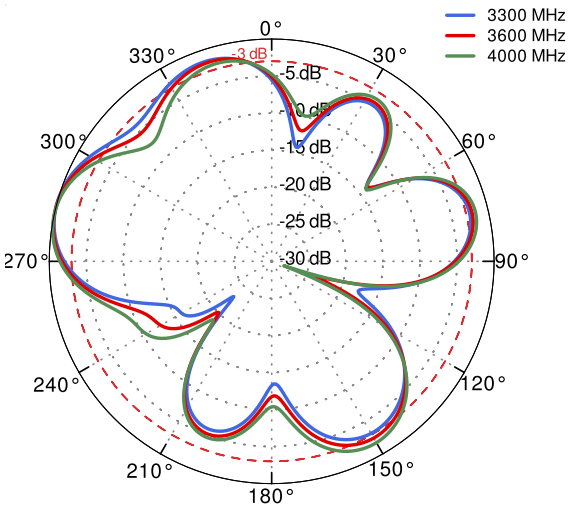


AZIMUTH

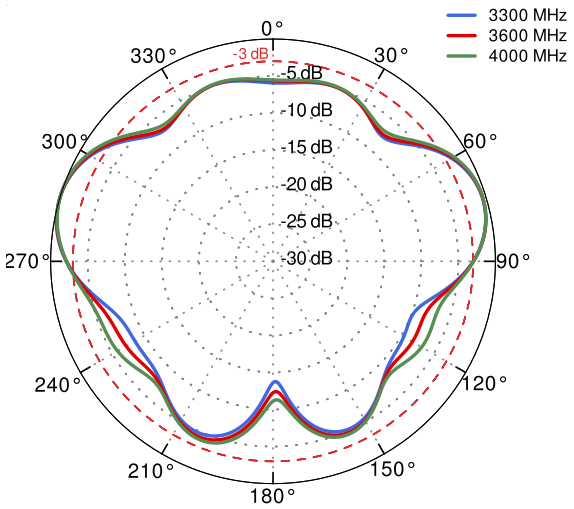


From 4.5GHz to 5.5GHz

ELEVATION

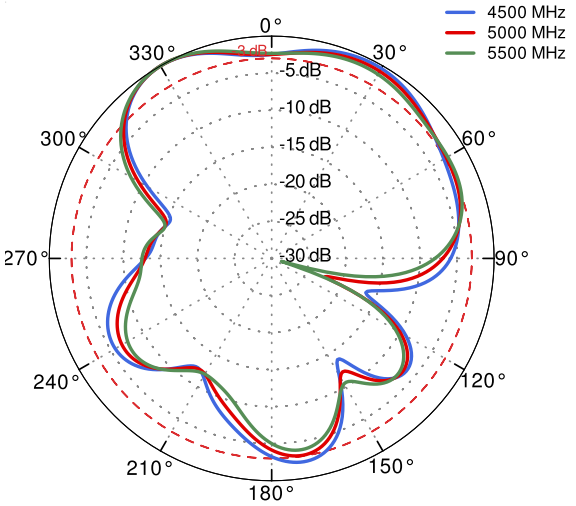



AZIMUTH

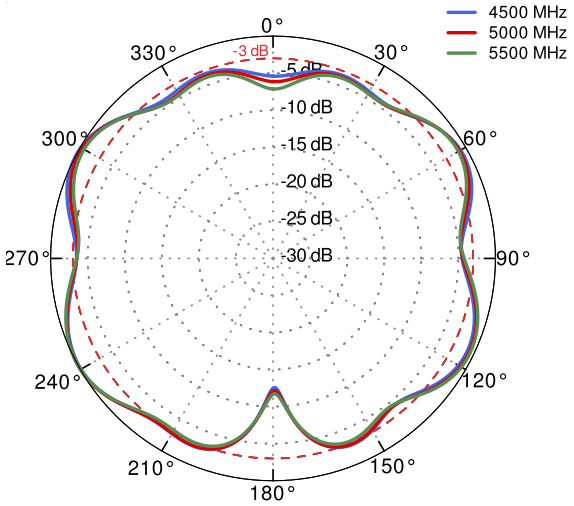

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

DIMENSIONS

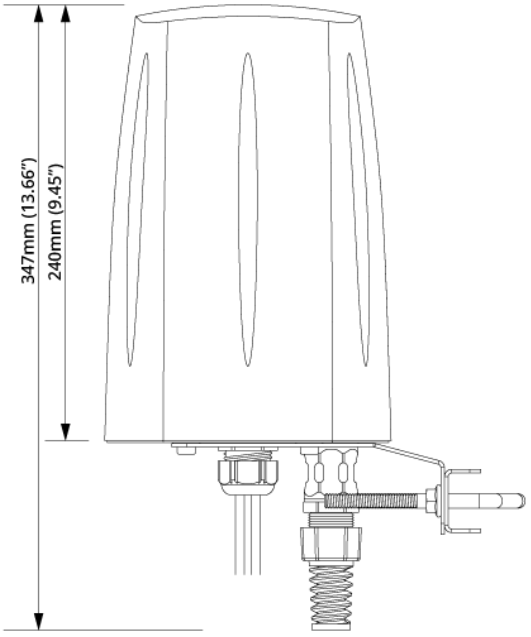

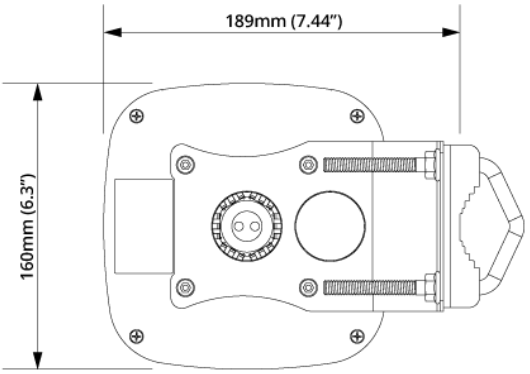

QuWireless
WWW.QUWIRELESS.COM
Sales email: sales@quwireless.com **Tel:** +48 513 900 416
Support email: support@quwireless.com **Website:** www.quwireless.com
Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.