

QuPanel LTE HP SISO

Directional High Power multiband LTE SISO antenna

QuPanel LTE HP directional high gain antenna is predicted for 4G LTE mainly, but is compatible with 3G and 2G as well. The antenna improves the signal in rural/suburban and locations where the mobile signal is weak. That antenna is predicted to be installed on the buildings (on the pole or on the wall). Due to very wide working frequency range, the antenna is universal client for LTE bands like LTE700/800/1800/1900/2100/2300/2600. It's compatible with Teltonika: RUT230, TRB140, TRB141, TRB142, TRB145, TRM240, TRM250 and other SISO LTE/3G/2G modems and routers.



LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n85, n89, n90, n95, n97, n98, n100, n101, n256
GAIN	694 - 960 MHz : 7 dBi 1.7 - 2.2 GHz : 7 dBi 2.2 - 2.7 GHz : 7 dBi
FRONT-TO-BACK	>10 dB
VSWR	<1.70, max <2.00
BEAMWIDTH	70°/70° ±15°
POLARIZATION	±45°
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, Fiberglass
INGRESS PROTECTION	IP67
DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
CABLE LENGTH	5m (P/N: APLS1-H) or 10m (P/N: APLS1-H1) or Nf connector (P/N: APLS1-HN)
CABLE TYPE	LMR195 white
CONNECTOR TYPE	1x SMA
MAST DIAMETER	25-66mm 0.98-2.60 inch

FREQUENCY BANDS

LTE / 4G GSM

617 MHz	5	8	12	13	14	17	18	960 MHz
	19	20	26	27	28	29	44	
	67	68	85	103	n81	n82	n83	
	n89	n100						

LTE / 4G UMTS

1710 MHz	1	2	3	4	9	10	25	2170 MHz
	33	34	35	36	37	39	n80	
	n84	n86	n95	n98	n101			

LTE / 4G WCS DARS

2300 MHz	30	40	n97					2400 MHz
-------------	----	----	-----	--	--	--	--	-------------

LTE / 4G

2400 MHz	7	38	41	53	69	n90		2700 MHz
-------------	---	----	----	----	----	-----	--	-------------


COMPATIBLE ROUTERS

VARIANTS: APLS1-H, APLS1-H1


TELTONIKA	TRB140, TRB141, TRB142, TRB143, TRB145, TRB245, TRB246, TRB255
ROBUSTEL	EG5101, M1000 MP, M1200
ETIC TELECOM	RAS-C-100-LW
FORTINET	Industrial GPS Modem F7916
FOUR-FAITH	4G LTE WiFi Modem F2X16 V4, LoRa Router F8936-L, Sim Card WiFi Router F3X26Q, Wireless 4G LTE Router F3X26-TB, Wireless M-Bus Gateway F-R100WM
MILESIGHT	UR32L, UR32S, UR41
ROBUSTEL	EG5101, M1000 MP, M1200
SIEMENS	6GK7243-7KX30-0XE0, 6GK7243-7SX30-0XE0
TELTONIKA	TRB140, TRB141, TRB142, TRB143, TRB145, TRB245, TRB246, TRB255
WAVETEL	WM21 4G Cat M/NB Modem
WLINK	M100, M303, R100, R200

PLOTS


VSWR

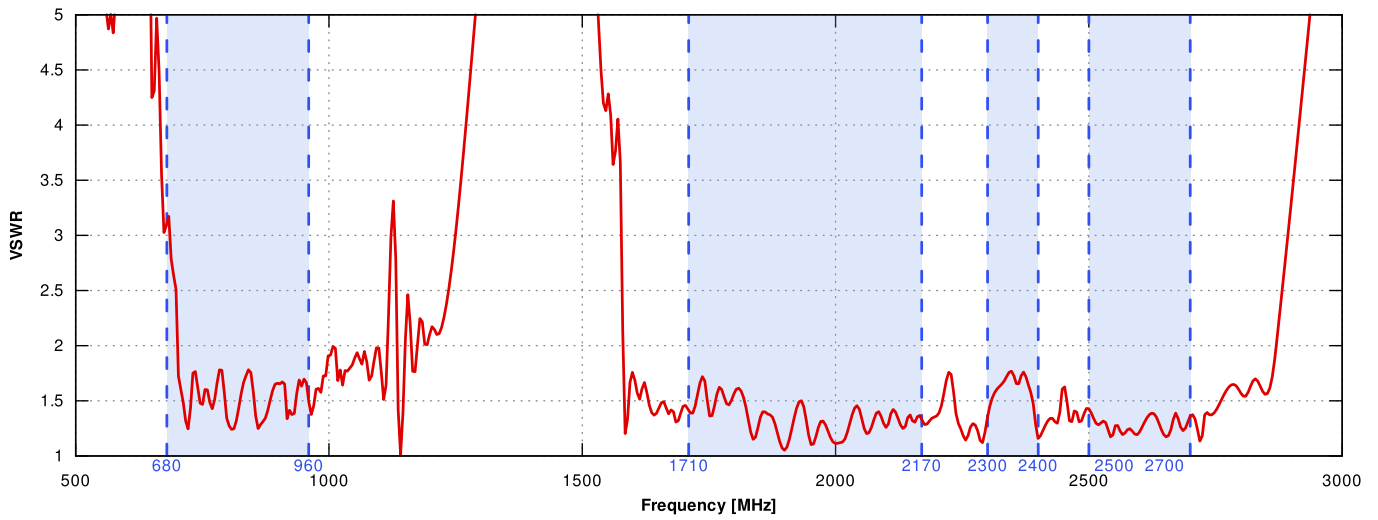


Gain

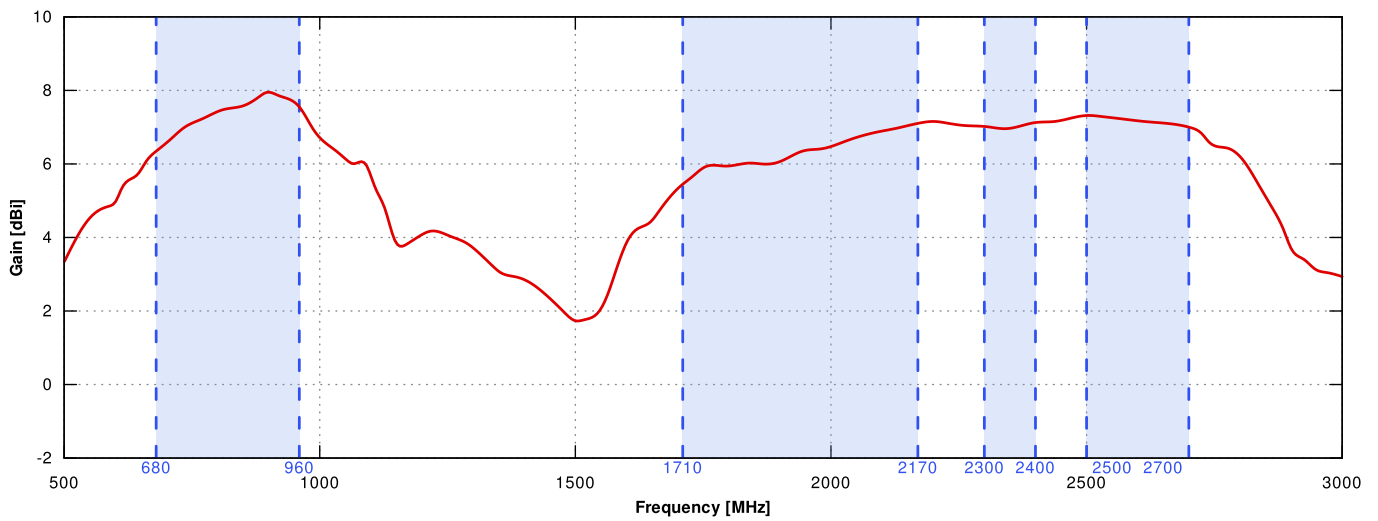


From 700MHz to 900MHz

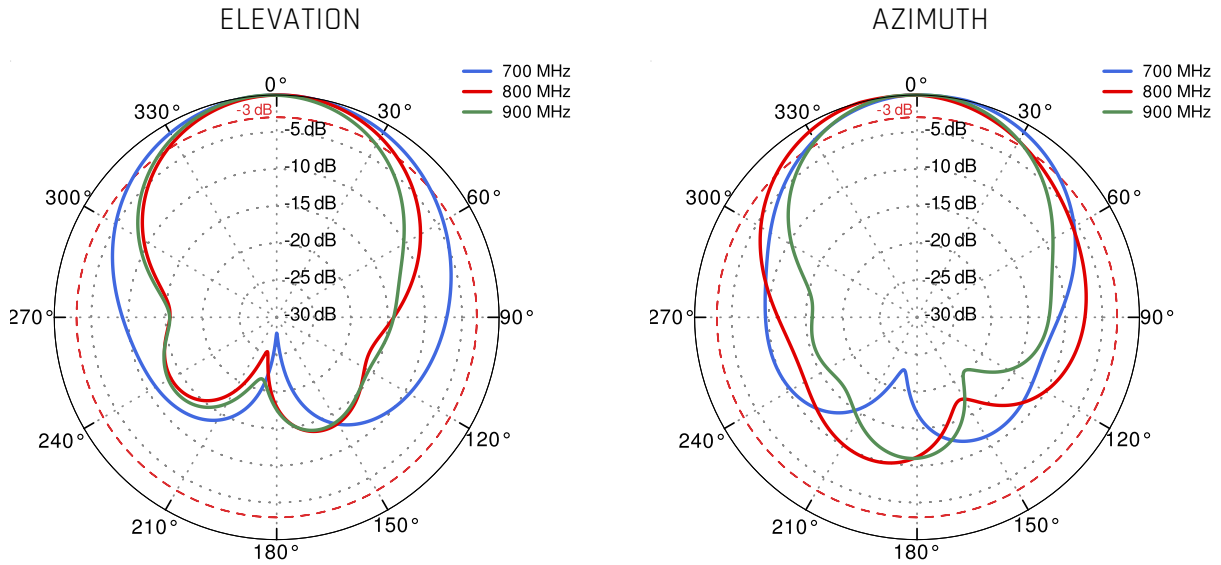

From 1.71GHz to 2.17GHz

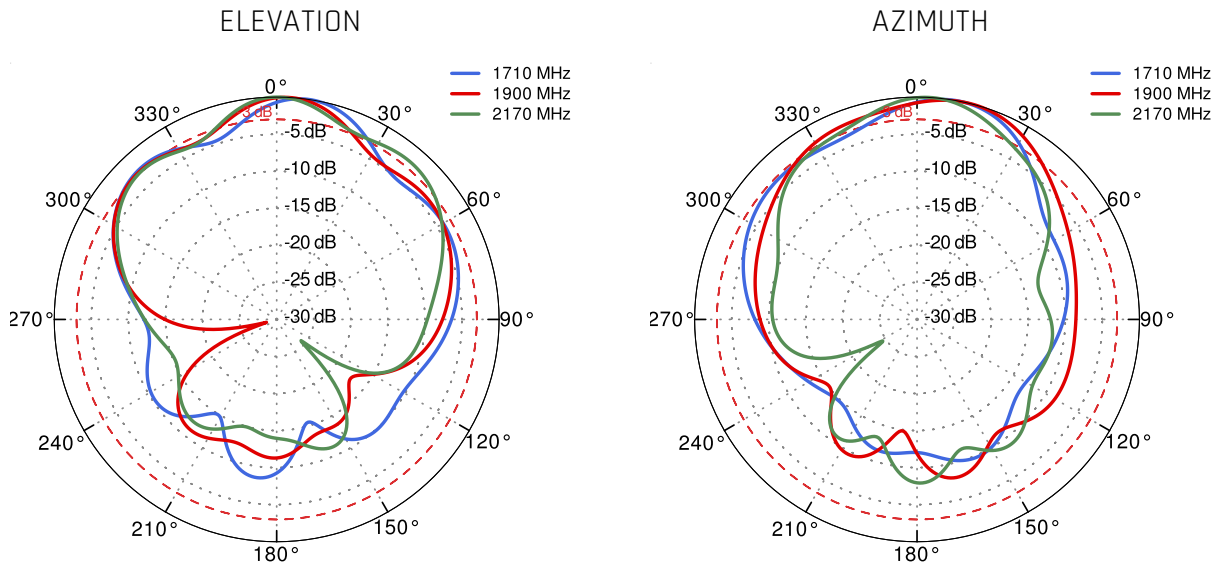

From 2.3GHz to 2.7GHz

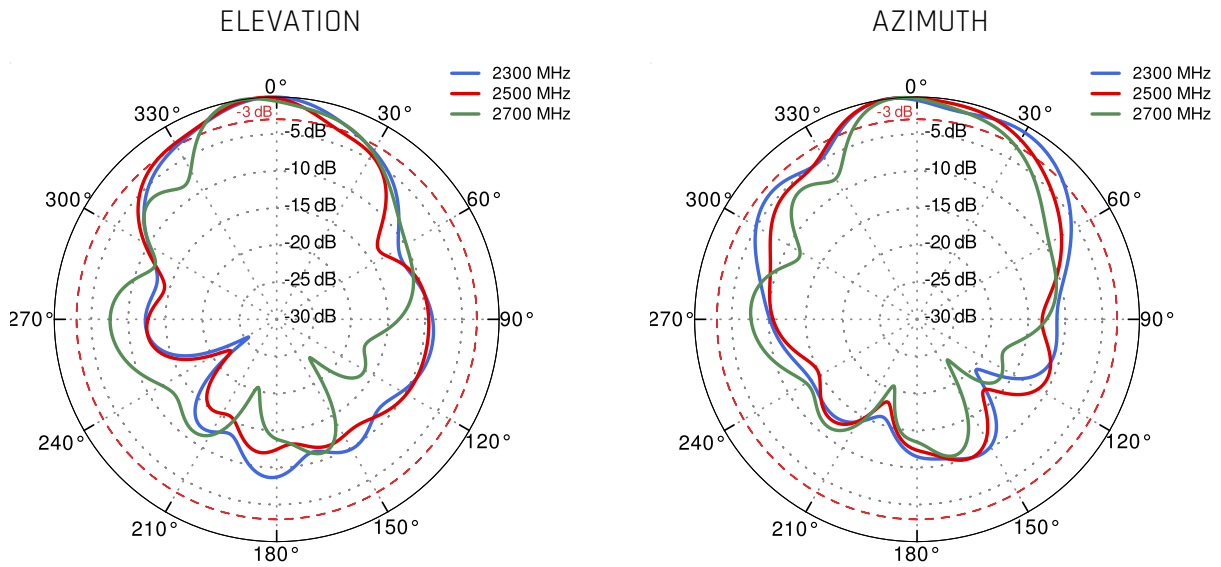

DIMENSIONS

