QuPS4

Outdoor power socket & plug - 4 PIN set

Outdoor power socket & plug 4 PIN set for all cases where the user doesn't want to use Passive PoE powering feature in all QuWireless antennas.




MECHANICAL SPECIFICATION

MAXIMUM CURRENT	5A
MAXIMUM VOLTAGE	200V
TEMPERATURE RANGE	-25...70°C
MINIMUM MATING CYCLE	500x
MINIMUM MATING CYCLE FOR MOLEX CONNECTOR	250x
INGRESS PROTECTION	IP68
CONNECTOR TYPE	SP1310/P4I-N, 4 pin Micro-Fit 3.0, 4 pin (2x2)
SP1310 CONNECTOR MATERIALS	Internal contacts material: Brass Internal contact finishing: Gold
MICRO-FIT 3.0 CONNECTOR MATERIALS	Internal contacts material: Phosphor bronze Internal contact finishing: Tin
CABLE TYPE	H05VV-F (OWY) 300/500V 4 cores 0,5mm^2, stranded wire, diameter 8mm, length 150mm
CONNECTOR PINOUT	1 - Power (+) 2 - GND (-) 3 - Data Input 4 - Data Output
CONNECTOR FLAMMABILITY CLASS	UL94V-0 flammability class of plastic housing

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

ROHS COMPLIANCE	Directive 2011/65/EU Directive 2015/863
WEIGHT	0.023 ± 0.005 kg 0.050 ± 0.011 lbs

DIMENSIONS

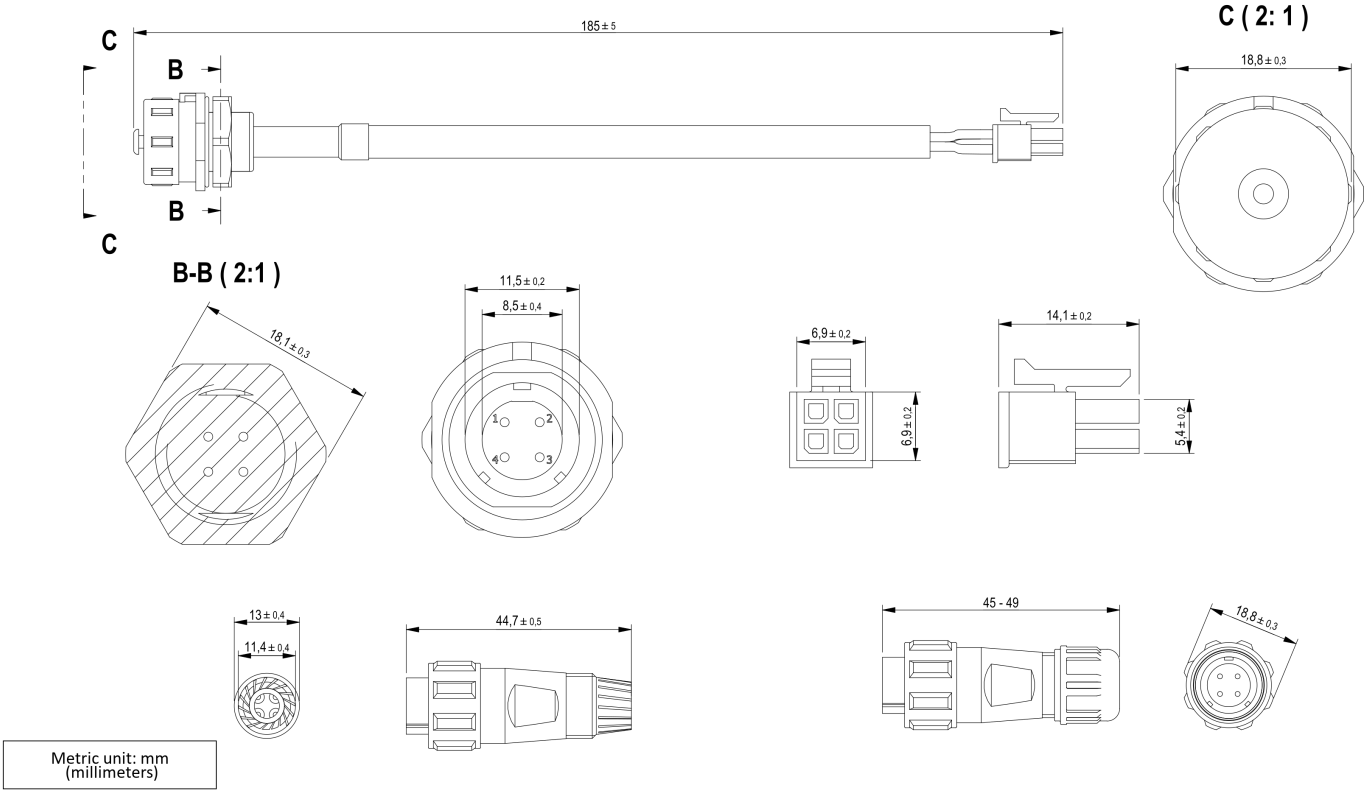

QuWireless

WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com **Tel:** +48 513 900 416

Support email: support@quwireless.com **Website:** www.quwireless.com

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.