


# QuSector 14HV-30-4522 Wi-Fi 6e Nf

QuSector 14HV-30-4522 Wi-Fi 6e Nf offers a 30x30 degree signal with 14 dBi gain with 4 connectors 5 - 7.125 GHz (MIMO 4x4) and 2 connectors 2.4 GHz (MIMO 2x2).

QuSector 14HV-30-4522 Wi-Fi 6e / Wi-Fi 7 is an excellent external and internal antenna for industrial installations that use Access Points with two radio modules (separate **MIMO 4x4** for 5/6/7 GHz and separate **MIMO 2x2** for 2.4 GHz). Thanks to medium gain, it can be used over short and medium distances, for example to urban hotspots, stadiums or public places. The high-quality injection molded housing allows it to be implemented in combination with **IP67** indoor and outdoor solutions. A wide frequency range (2.4-2.5 GHz and 5.1-7.125 GHz) helps you find the right frequency for the most effective operation. The antenna is supplied with six Nf connectors.

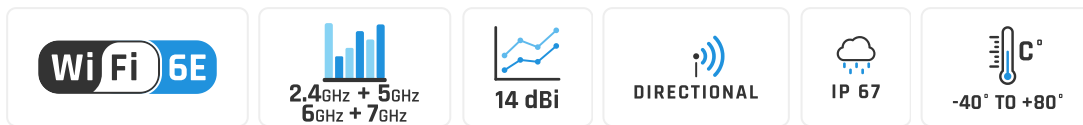

 OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP67

 ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER

 WALL OR MAST MOUNTING SYSTEM WITH **TWO PLANES, 60 DEGREES REGULATION**

 MADE IN **EUROPE**



## WI-FI SPECIFICATION

<b>FREQUENCY</b>	2.4 - 2.5GHz 5.1 - 7.125GHz
<b>GAIN</b>	14 dBi
<b>VSWR</b>	< 2.00
<b>BEAMWIDTH</b>	30°/30°
<b>POLARIZATION</b>	Horizontal Vertical
<b>IMPEDANCE</b>	50 $\Omega$
<b>SEPARATION BETWEEN CONNECTORS</b>	>30 dB
<b>FRONT-TO-BACK</b>	> 20dB >25dB
<b>MAX INPUT POWER</b>	50W
<b>DC GROUND</b>	Yes

## MECHANICAL SPECIFICATION

<b>MATERIAL</b>	ABS
<b>CONNECTOR</b>	6xNf
<b>OUTER DIMENSIONS</b>	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
<b>WEIGHT</b>	1.8 kg
<b>OPERATING TEMPERATURE</b>	-40°C to +80°C -40°F to 176°F

## MOUNTING KIT

### DIMENSIONS

9.9 x 10.5 x 14.8 cm  
3.9 x 4.13 x 5.83 inch

### REGULATION RANGE

+/- 30°

### MAST DIAMETER RANGE

25 - 66mm  
0.98-2.60 inch

### MATERIAL

Polyamide with fiberglass + galvanized steel U-Bolts

### MOUNTING PLACE


Wall or ceiling or mast

## COMPATIBLE ROUTERS


VARIANT: S14HV.30.4522NF

## PLOTS


VSWR 2.4GHz to 2.5GHz

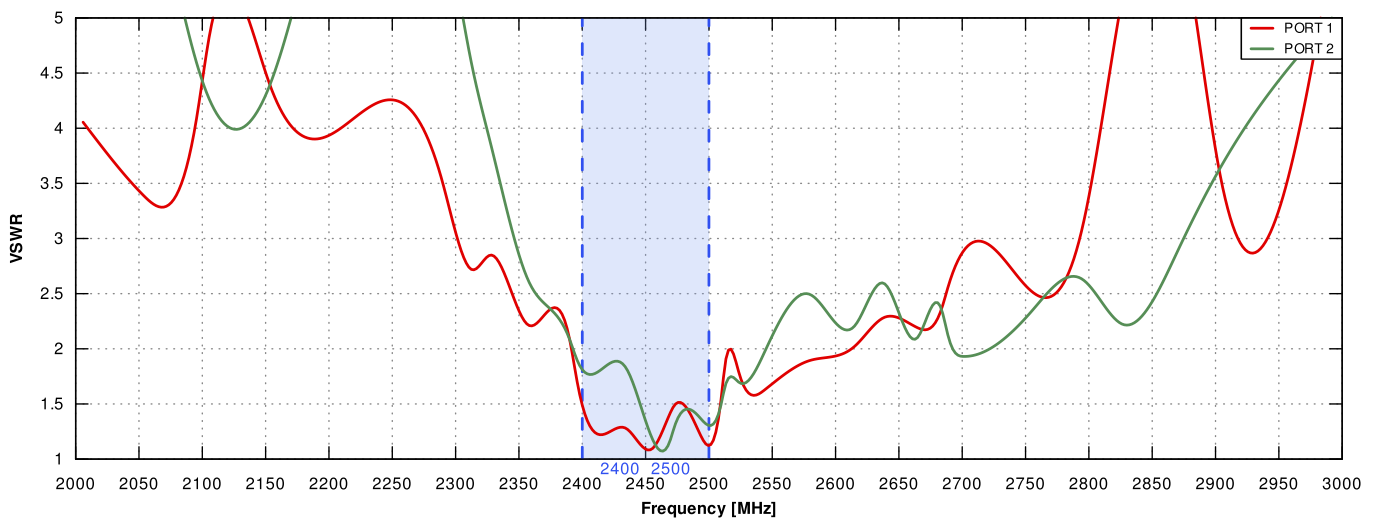


### VSWR 5.1GHz to 7.125GHz

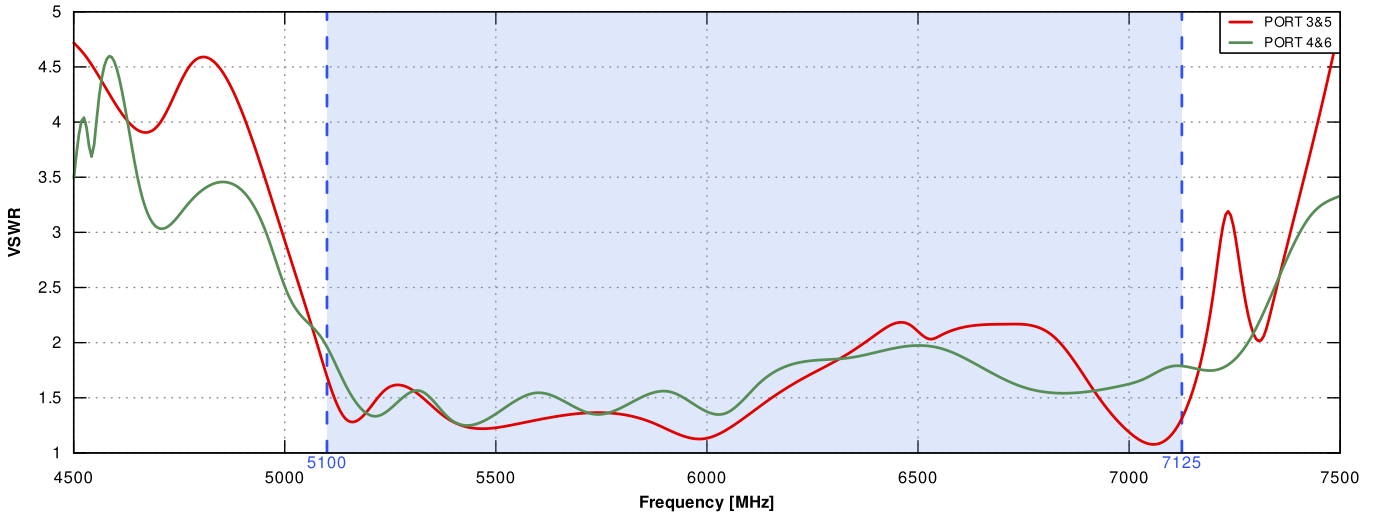


### Gain 2.4GHz to 2.5GHz

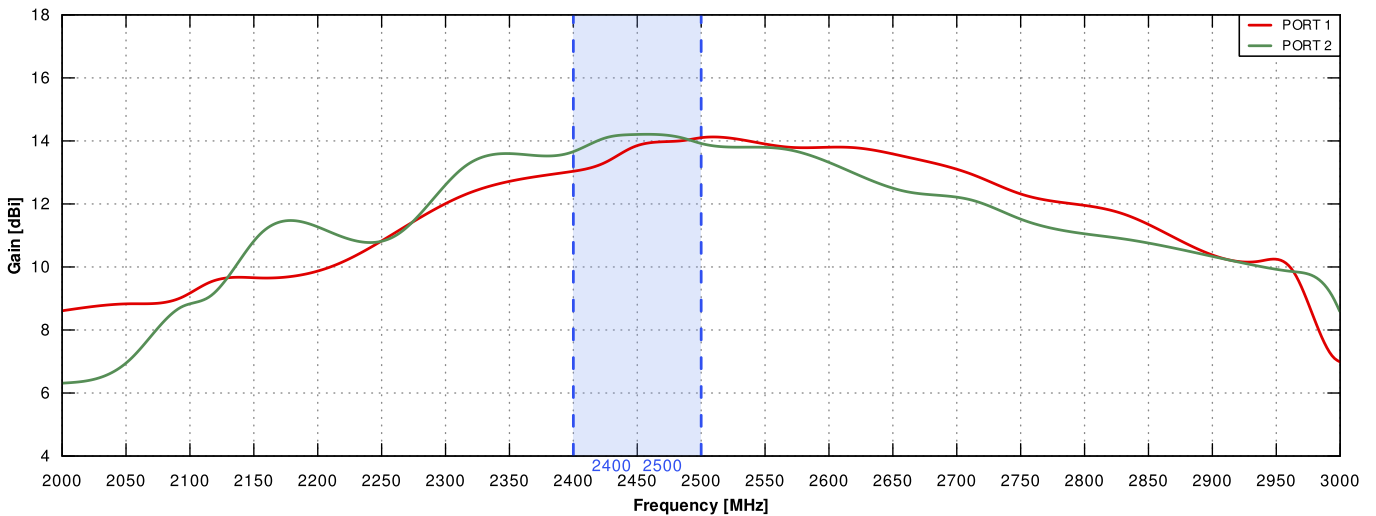


Gain 5.1GHz to 7.125GHz

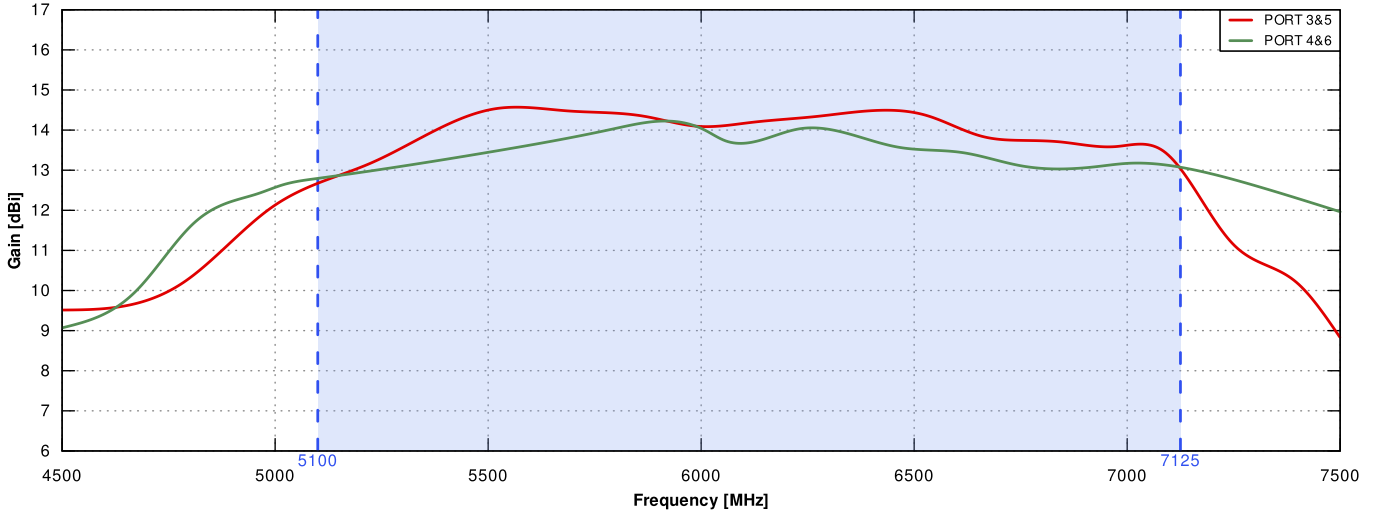


PORT 1 from 2.4GHz to 2.5GHz

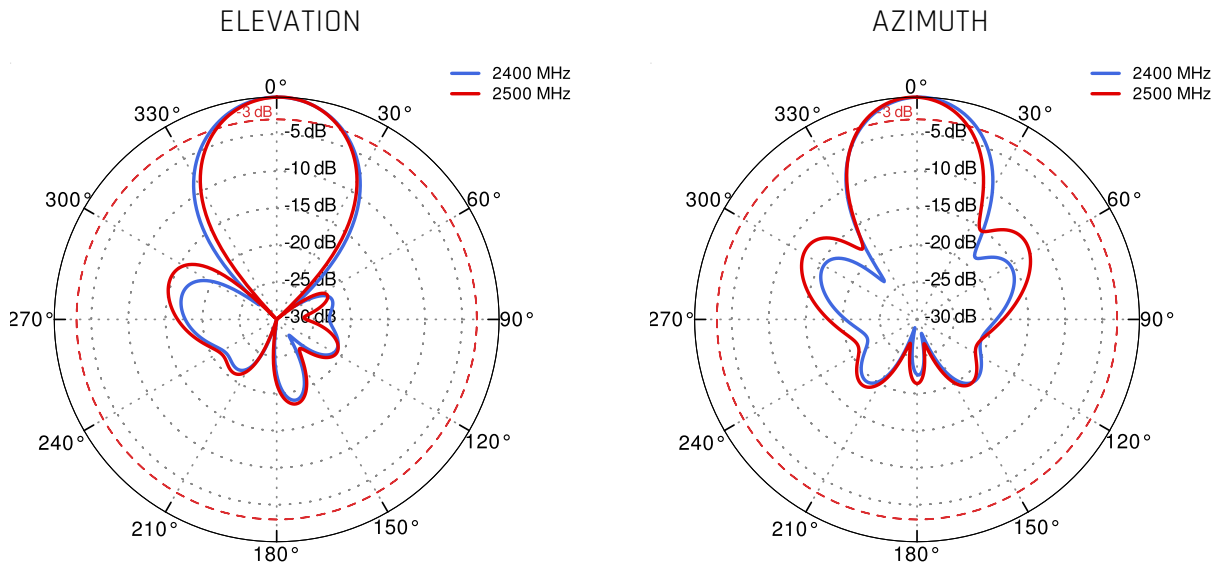


PORT 2 from 2.4GHz to 2.5GHz

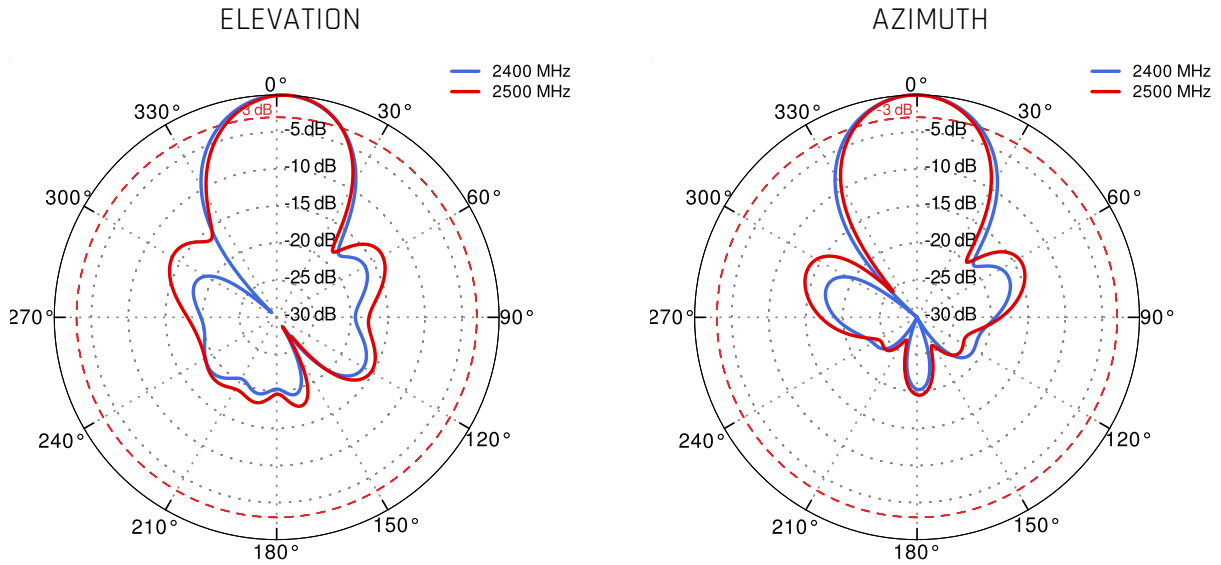

PORT 3, 5 from 5.1GHz to 6.9GHz

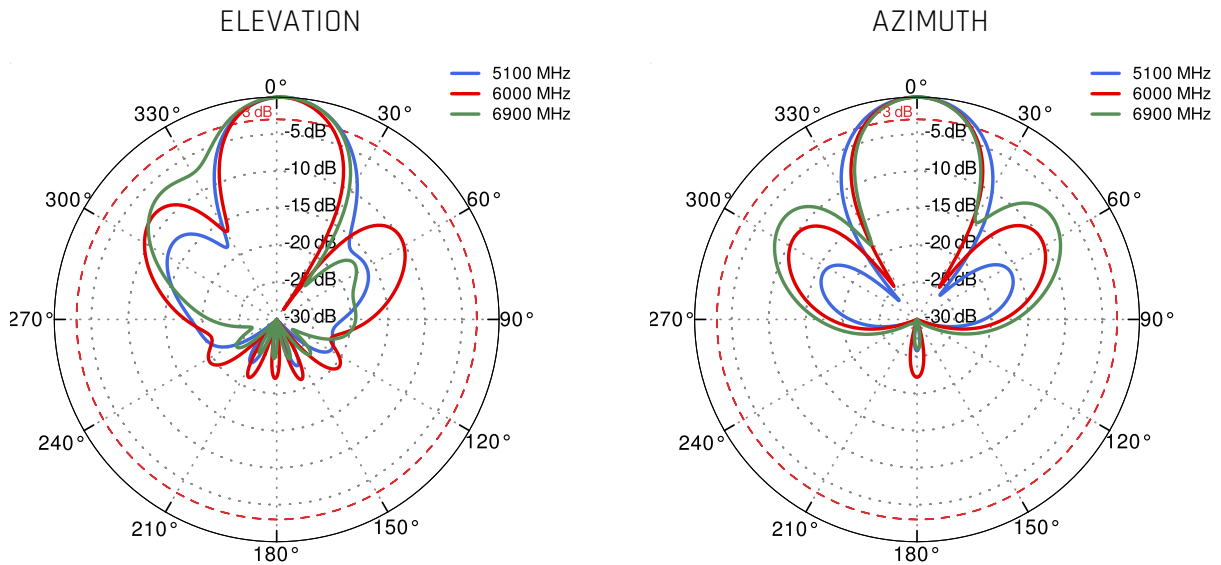

PORT 4, 6 from 5.1GHz to 6.9GHz

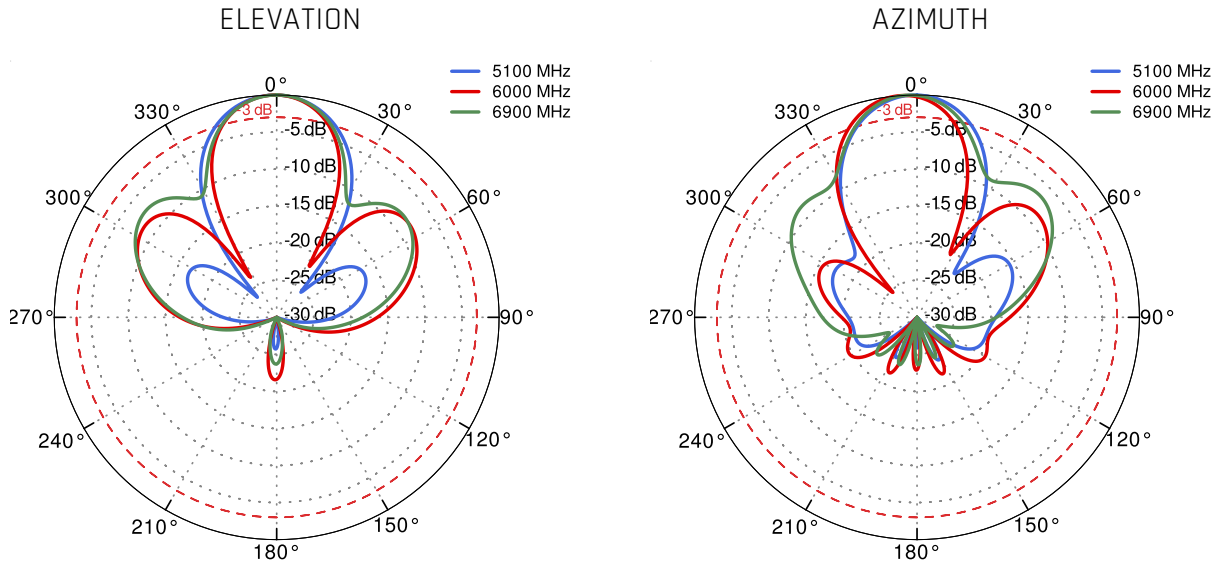

## DIMENSIONS

