QuSector 14X-30-4 Wi-Fi 6e

QuSector 14X-30-4 Wi-Fi 6e offers a 30 degrees, 14dBi gain signal with two 2.4GHz and 5GHz+7GHz connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector 14X-30-4 Wi-Fi 6e is a concurrent dual band, X polarity, MIMO 4x4 panel antenna. It operates at 2.4GHz and 5-7.125GHz simultaneously with 14dBi gain. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. Wide frequency range (2.4-2.5GHz & 5.1-7.125GHz) helps to find suitable frequency for the most effective operation. The antenna comes with four 70cm (28inch) cables terminated with RPTNC, RPSMA or Nm connectors.

Wi Fi 6E | 2.4GHz + 5GHz 6GHz + 7GHz | 14 dBi | DIRECTIONAL | IP 67 | -40° TO +80° | 4x4 MIMO



WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5GHz 5.1 - 7.125GHz
GAIN	14 dBi
VSWR	< 2.00
BEAMWIDTH	30°/30°
POLARIZATION	X (+-45degrees)
IMPEDANCE	50 Ω
SEPARATION BETWEEN CONNECTORS	>25dB
FRONT-TO-BACK	> 20dB >25dB
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ASA
CONNECTOR	4xRPSMA/4xNM/4xRPTNC
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 66mm 0.98-2.60 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
MOUNTING PLACE	Wall or ceiling or mast

COMPATIBLE ROUTERS

VARIANT: S14X.30.4RS

ADTRAN	Bluesocket 1925
ADVANTECH	EKI-6333AC-2G, EKI-6333AC-4GP, EKI-6333AC-M12
ALCATEL-LUCENT	Stellar AP1222, Stellar AP1322
ARUBA	AP-314, AP-324, AP-334, AP-344, AP-514, AP-534, AP-634, AP-734, AP-764, IAP-314, IAP-324, IAP-334
CISCO	Catalyst IW9165E
COMSET	CM770W-6
D-LINK	DWL-6600AP, DWL-6610APE, DWL-8600AP
ENGENIUS	EAP1300EXT, ECW160, ECW260, ENS620EXT, ESW850
ERICSSON (CRADLEPOINT)	R2400

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

EXTREME NETWORKS	AP 305Cx, AP 8533, AP3000X, AP310e
FORTINET	AP1020E, AP822E, FAP-223C, FAP-223E, FAP-224D, FAP-433F, FAP-433G, FAP-C225C, FAP-U223EV, FAP-U432F
HUAWEI	AP6150DN
JUNIPER NETWORKS	AP41E
MIKROTIK	L23UGSR-5HaxD2HaxD, RB912
MIST	AP32E, AP41E, AP43E, AP61E
PEPLINK	Balance 310 fiber 5G, MAX HD2, MAX HD4
WAVETEL	W3604 Multi-WAN, W3608 Multi-WAN
WLINK	G930
OTHER	4 * RPSMA

VARIANT: S14X.30.4NM

RAJANT	BreadCrumb ES1–5050CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1–2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS
AEROHIVE NETWORKS	AP1130
ARISTA	O-105E
ARUBA	AP-674
CISCO	AIR-CAP1532E, AIR-CAP1562E, AIR-CAP1572EAC, AIR-CAP1572EC, Catalyst 9163E, Catalyst IW6300, IW3702-2E, IW3702-4E, MR74, MR76, MR84, MR86

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

D-LINK	DWL-8710AP
EXTREME NETWORKS	AP 360E, AP 3965E
FORTINET	FAP-222C
HUAWEI	AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8150DN
PEPLINK	AP Pro AX
RAJANT	BreadCrumb ES1–5050CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1–2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS
RUCKUS	T750SE
SIEMENS	6GK5788-1GY01-0AA0, 6GK5748-1GY01-0AA0
XIRRUS	XH2-120
OTHER	4 * N-male


VARIANT: S14X.30.4RT

CISCO	AIR-CAP1852E, AIR-CAP2602E, AIR-CAP2702E, AIR-CAP2802E, AIR-CAP3602E, AIR-CAP3702E, AIR-CAP3702P, AIR-CAP3802E, AIR-CAP3802I, AIR-CAP3802P, Catalyst 9115AXE, Catalyst 9120AXE, Catalyst 9120AXP, MR42E, MR46E, MR53E
OTHER	4 * RPTNC


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PLOTS

VSWR

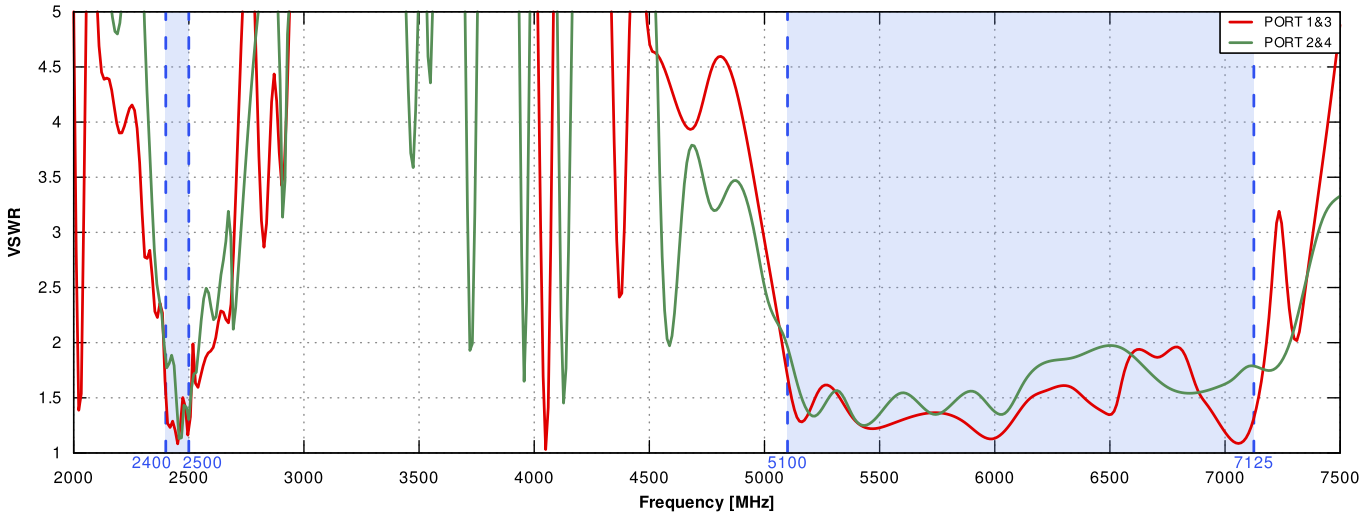


Gain

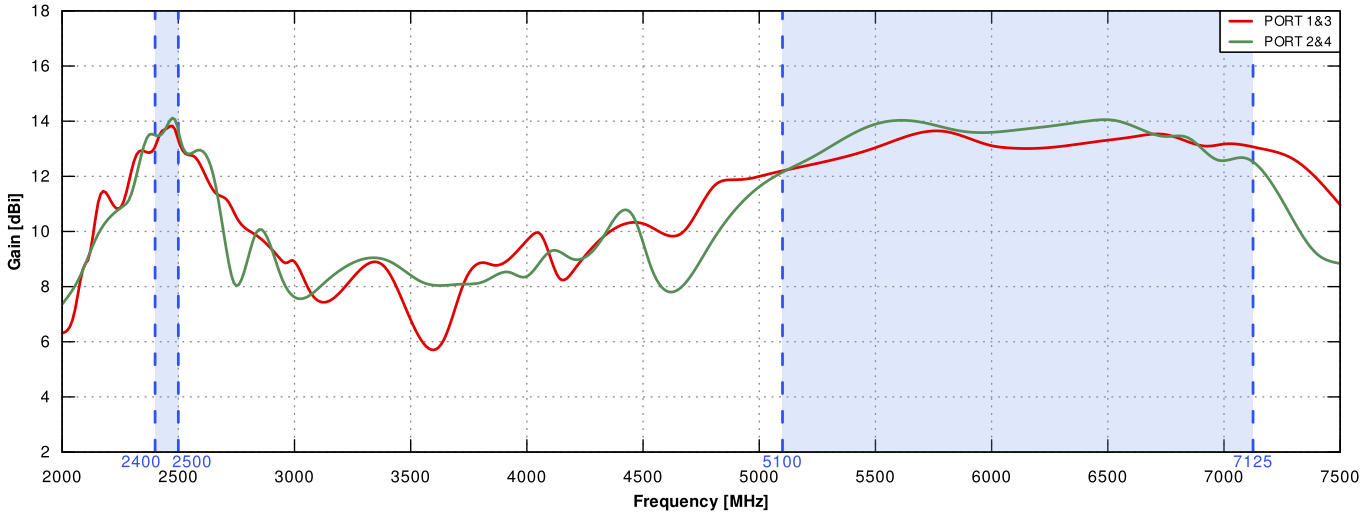


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PORT 1, 3 from 2.4GHz to 2.5GHz

ELEVATION

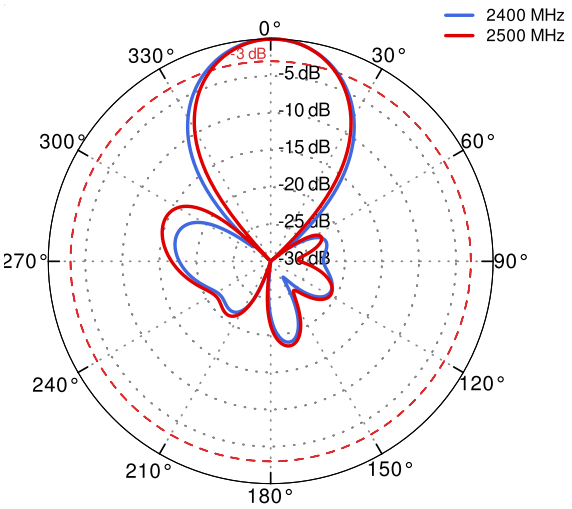


AZIMUTH

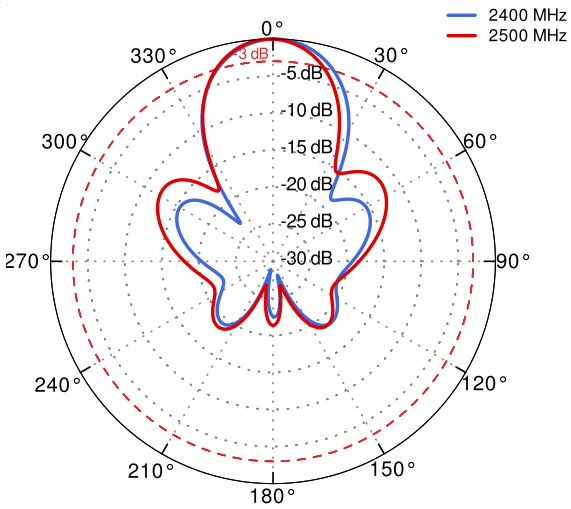


PORT 1, 3 from 5.1GHz to 6.9GHz

ELEVATION

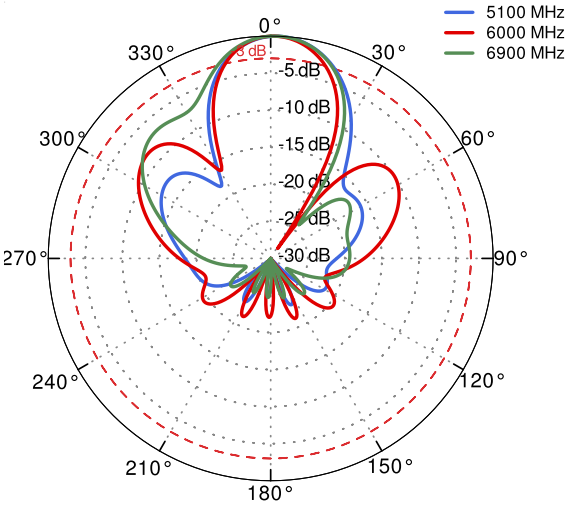


AZIMUTH

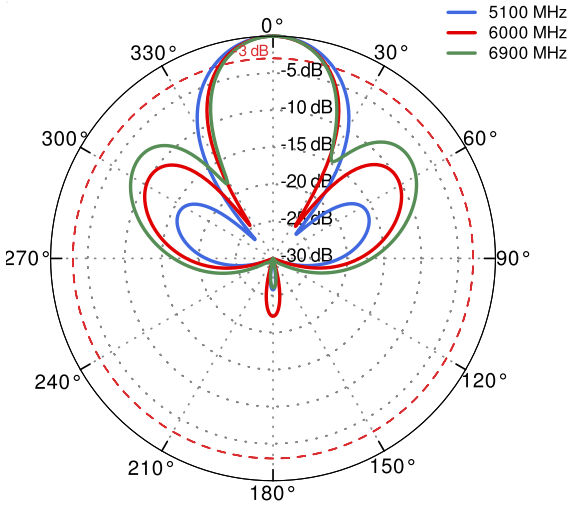


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PORT 2, 4 from 2.4GHz to 2.5GHz

ELEVATION

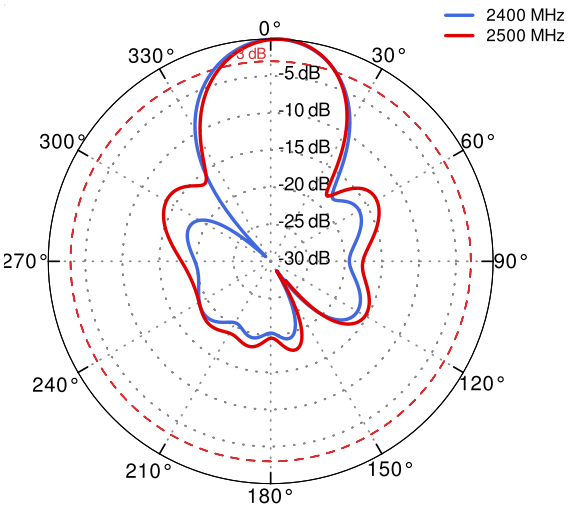


AZIMUTH

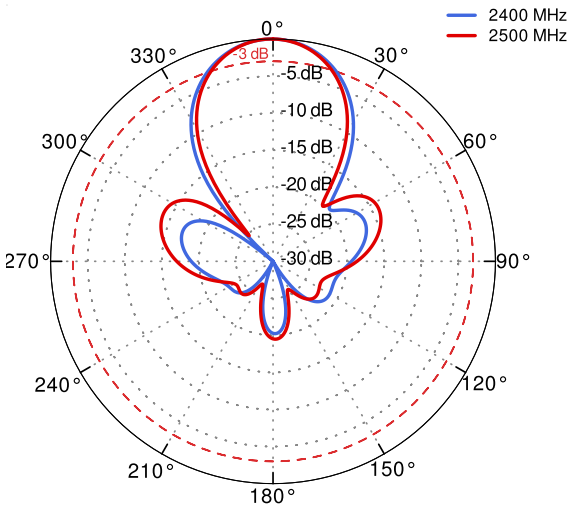


PORT 2, 4 from 5.1GHz to 6.9GHz

ELEVATION

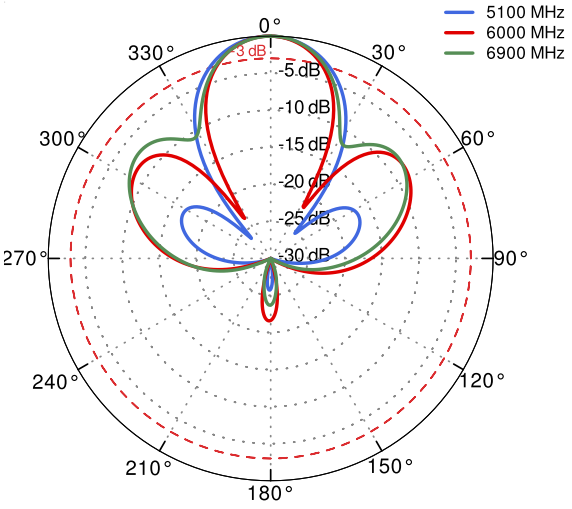


AZIMUTH

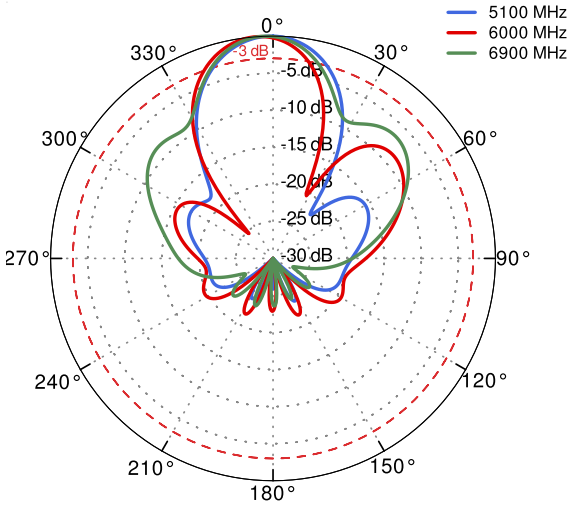

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

DIMENSIONS

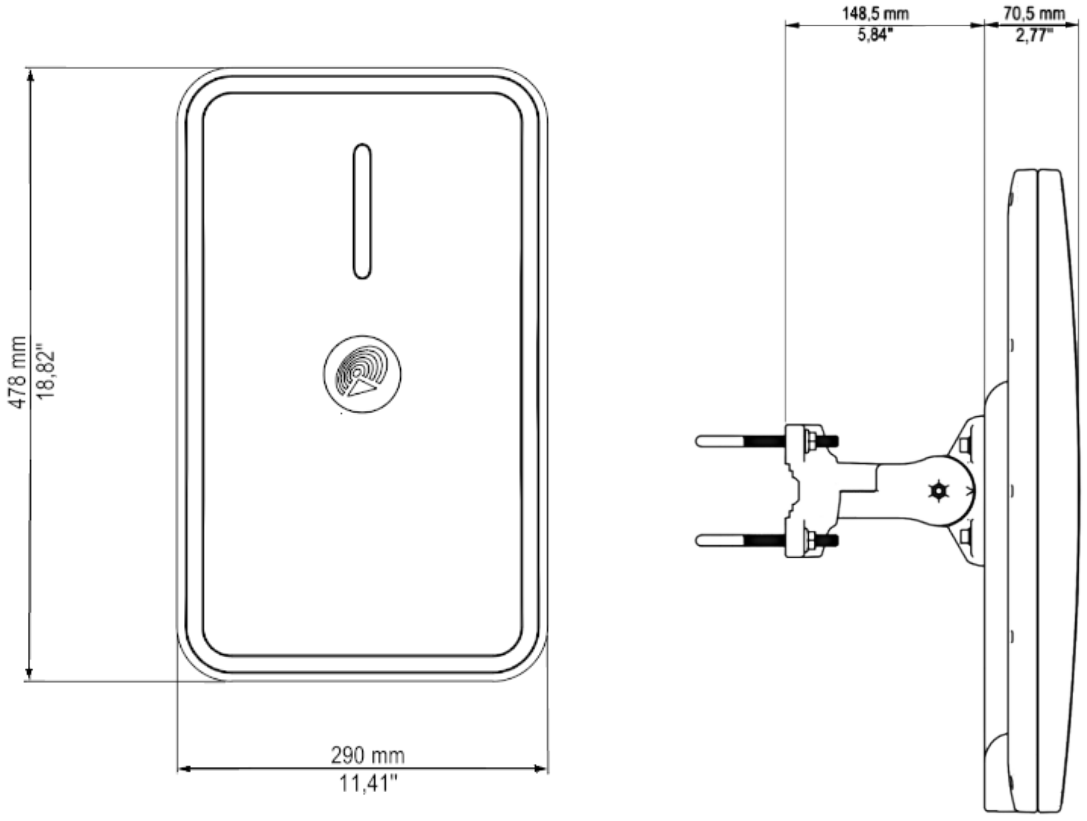

QuWireless
WWW.QUWIRELESS.COM
Sales email: sales@quwireless.com
Tel: +48 513 900 416
Support email: support@quwireless.com
Website: www.quwireless.com
Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.