

QuSector 9HV-65-3 Wi-Fi 6E

QuSector 9HV-65-3 Wi-Fi 6E offers a 65 degrees, 8dBi (2.4GHz) & 9dBi (5GHz-7GHz) gain signal. It is a perfect indoor and outdoor device for industrial installations.

QuSector 9HV-65-3 is a concurrent dual band, H&V polarity, MIMO 3x3 panel antenna. It simultaneously operates at **2.4GHz** with 8dBi gain and at **5GHz-7GHz** with 9dBi gain. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. Wide frequency range (2.4-2.5GHz & 5-7.125GHz) helps to find suitable frequency for the most effective operation. It is designed to be applied mainly to special access points working in the systems where two bands (frequencies) are diplexed for one antenna connector. The antenna comes in following configurations: 3*70cm (28inch) cables terminated with Nm, RPSMA, RPTNC connectors. QuSector 9HV-65-3 was designed to be a perfect match for your access point.

Wi-Fi 6E
2.4GHz + 5GHz
6GHz + 7GHz
9 dBi
DIRECTIONAL
IP 67
-40° TO +80°

ADJUSTABLE, POLE **MOUNTING**
SYSTEM




ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP67



MADE IN **EUROPE**

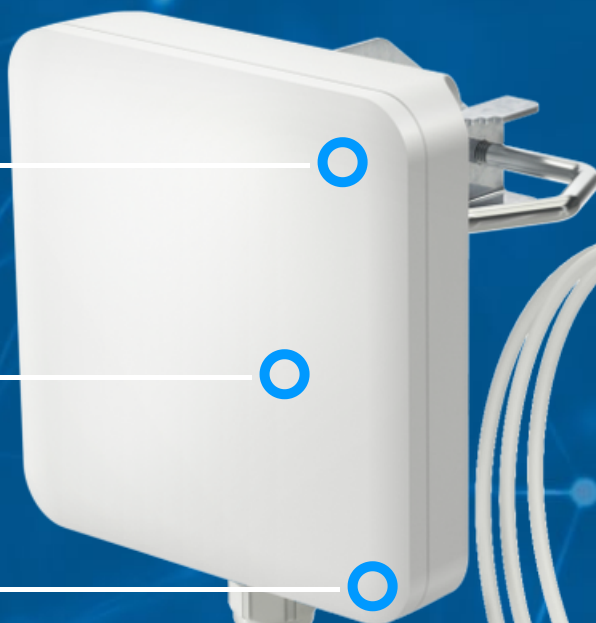

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5 - 7.125 GHz
GAIN	2.4 - 2.5 GHz: 8 dBi 5 - 7.125 GHz: 9 dBi
VSWR	< 1.80
BEAMWIDTH	2.4 - 2.5 GHz - 65°/65° 5 - 7.125 GHz - 60°/60°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 Ω
SEPARATION BETWEEN CONNECTORS	2.4 - 2.5 GHz: > 33dB
FRONT-TO-BACK	2.4 - 2.5 GHz: 20dB 4.9 - 6 GHz: 25dB
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	3xRPSMA/3xNM/3xRPTNC
OUTER DIMENSIONS	16.5 x 16.5 x 4.5 cm 6.5 x 6.5 x 1.77 inch
WEIGHT	0.9 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

MOUNTING KIT

MATERIAL	Galvanized steel
WEIGHT	0.3 kg
MOUNTING PLACE	Mast
MAST DIAMETER	40-66 mm 1.57-2.60 inch

COMPATIBLE ROUTERS

VARIANT: S9HV.65.3RT

CISCO

AIR-AP1602E

OTHER

3 * RPTNC

VARIANT: S9HV.65.3RS

TELTONIKA

RUT976, RUTC50

ADVANTECH

ICR-4401W

ARUBA

AP-114, AP-214, AP-224, AP-304, IAP-214, IAP-224, IAP-304

D-LINK

DSR-1000AC

EXTREME NETWORKS

AP 7532

FORTINET

FAP-S313C, FAP-S323C, FAP-S323CR

HUAWEI

AP5130DN

JUNIPER NETWORKS

AX11

TELTONIKA

RUT976, RUTC50

OTHER

3 * RPSMA


VARIANT: S9HV.65.3NM

SIEMENS6GK5748-1GD00-0AB0, 6GK5748-1GD00-0AA0, 6GK5788-1GD00-0AA0,
6GK5788-1GD00-0AB0**OTHER**


3 * N-male

PLOTS



VSWR 

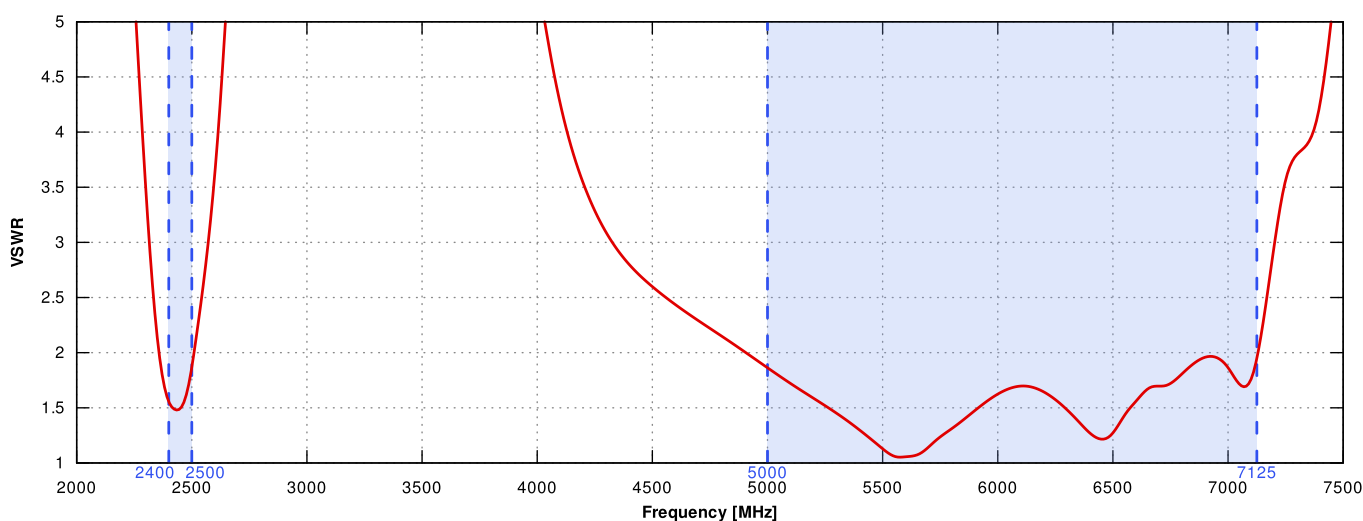



Gain 

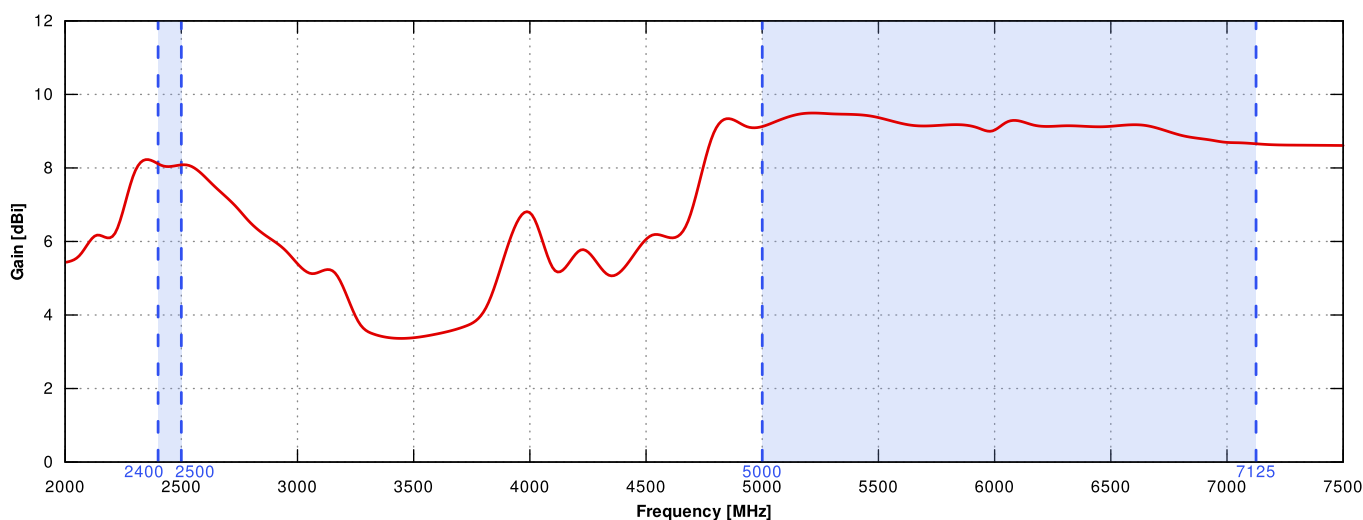



2.4GHz to 2.5GHz

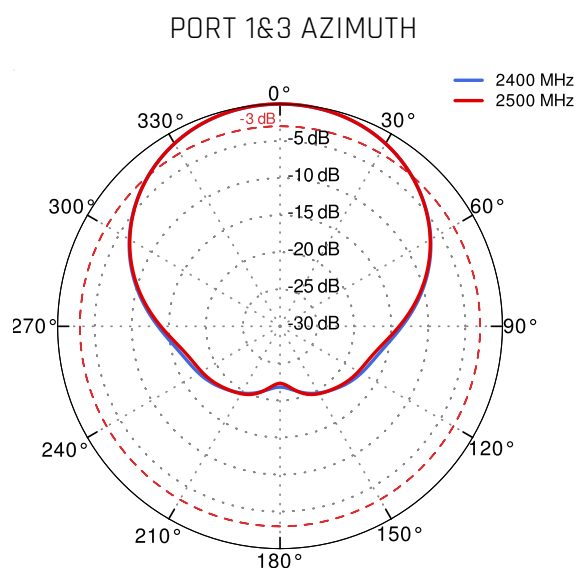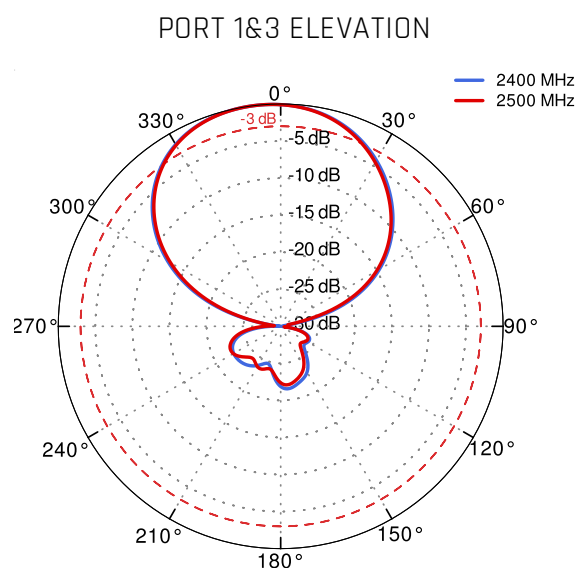



5GHz to 6GHz

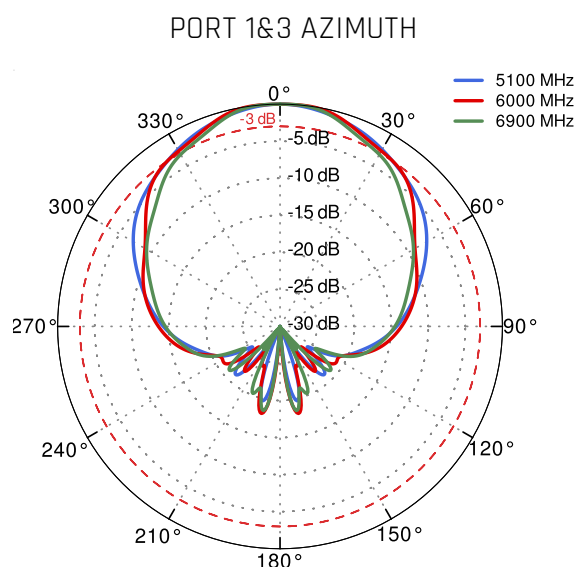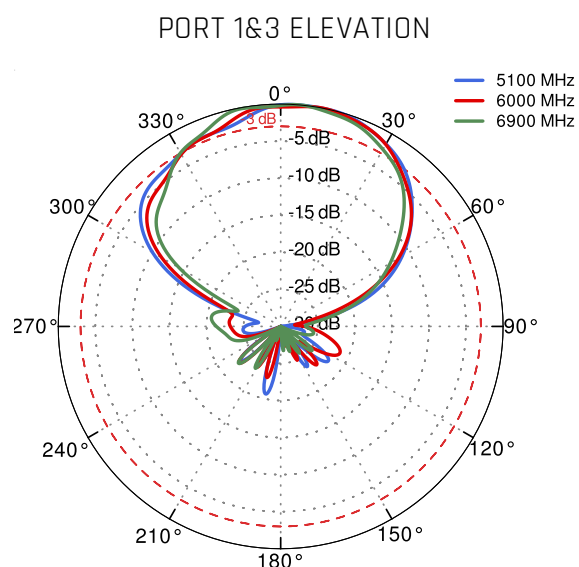

2.4GHz to 2.5GHz

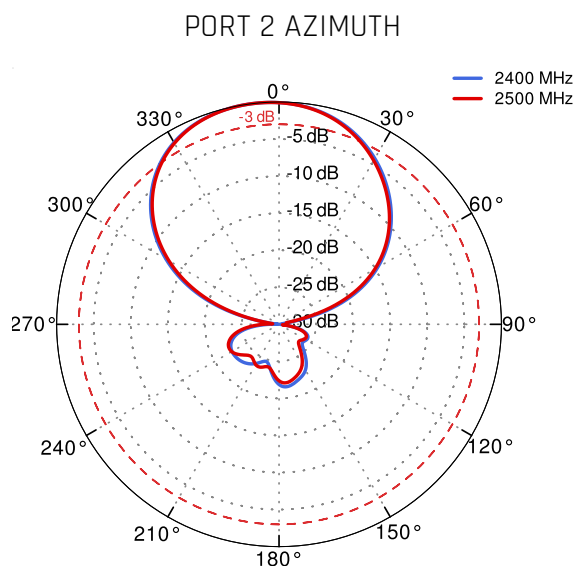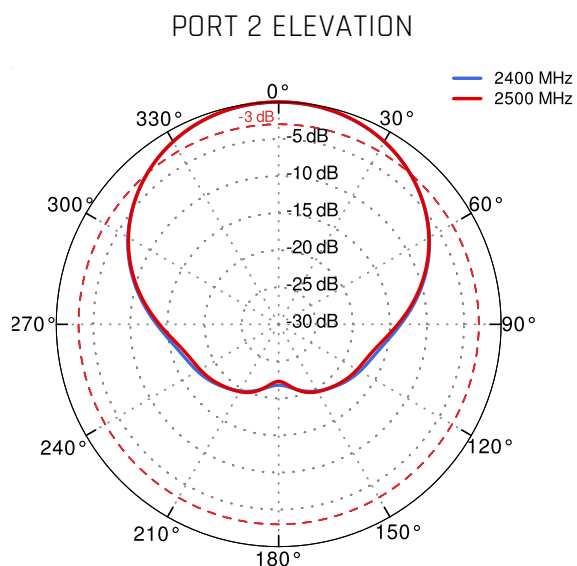

5GHz to 6GHz

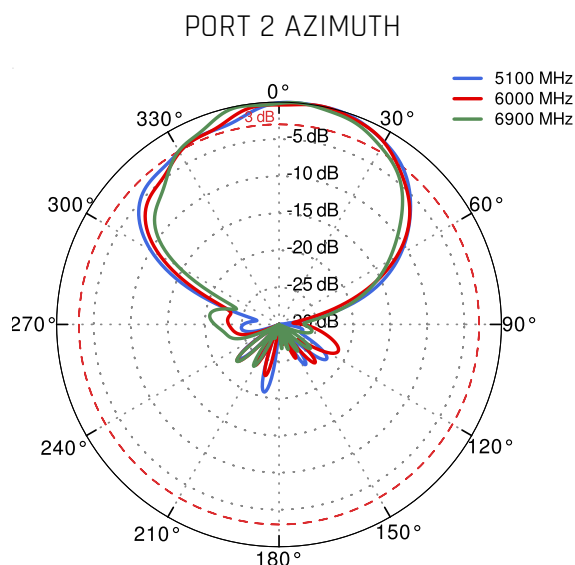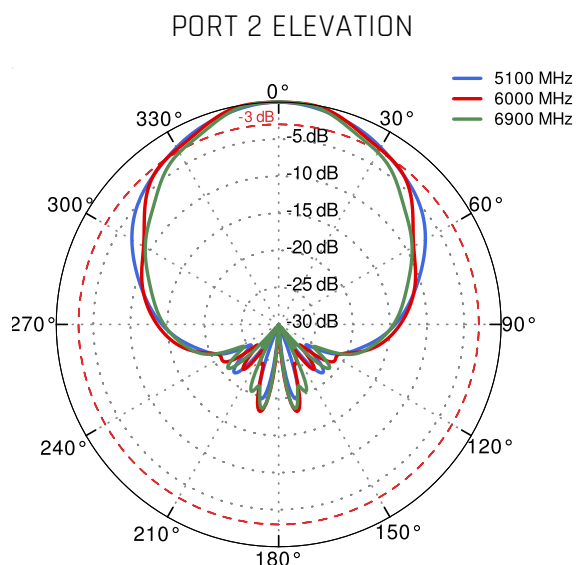

DIMENSIONS

