

QuSector S57-14HV-90-4 Nf

QuSector S57-14HV-90-4 offers a 90 degrees, 14dBi gain signal with four Nf connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector S57-14HV-90-4 Nf is a concurrent, Wi-Fi 6e / 7, H&V polarity, MIMO 4x4 panel antenna. It simultaneously operates at **5.1GHz** and **7.125GHz** with **14dBi gain**. Due to its high gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. High quality injection moulded enclosure allows to implement it alongside with indoor and IP68 outdoor solutions.


The antenna comes with integrated Nf connectors.



OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP68



ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER



WALL OR MAST MOUNTING SYSTEM WITH **TWO PLANES, 60 DEGREES REGULATION**



MADE IN **EUROPE**



WI-FI SPECIFICATION

FREQUENCY	5.1 - 7.125GHz
GAIN	14 dBi
VSWR	< 2.00
BEAMWIDTH	90°/16°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 Ω
FRONT-TO-BACK	> 25dB
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xNf
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

MOUNTING KIT

DIMENSIONS

9.9 x 10.5 x 14.8 cm
3.9 x 4.13 x 5.83 inch

REGULATION RANGE

+/- 30°

MAST DIAMETER RANGE

25 - 66mm
0.98-2.60 inch

MATERIAL

Polyamide with fiberglass + galvanized steel U-Bolts

MOUNTING PLACE

Wall or ceiling or mast

COMPATIBLE ROUTERS

VARIANT: SS57.14HV.90.4NF

RAJANT

BreadCrumb ES1-5050CS, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1-2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS

CISCO

AIR-CAP1532E, Catalyst IW9165E

DIGI

TX64

EXTREME NETWORKS

AP3000X

MIKROTIK


L23UGSR-5HaxD2HaxD

RAJANT


BreadCrumb ES1-5050CS, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1-2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS

PLOTS


VSWR

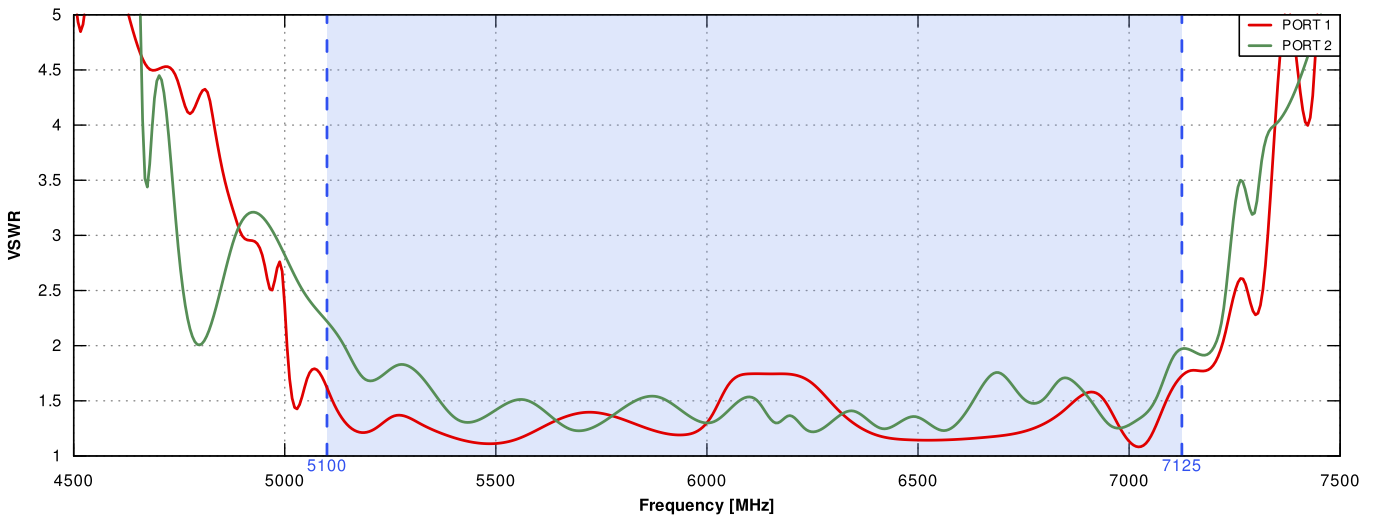


Gain

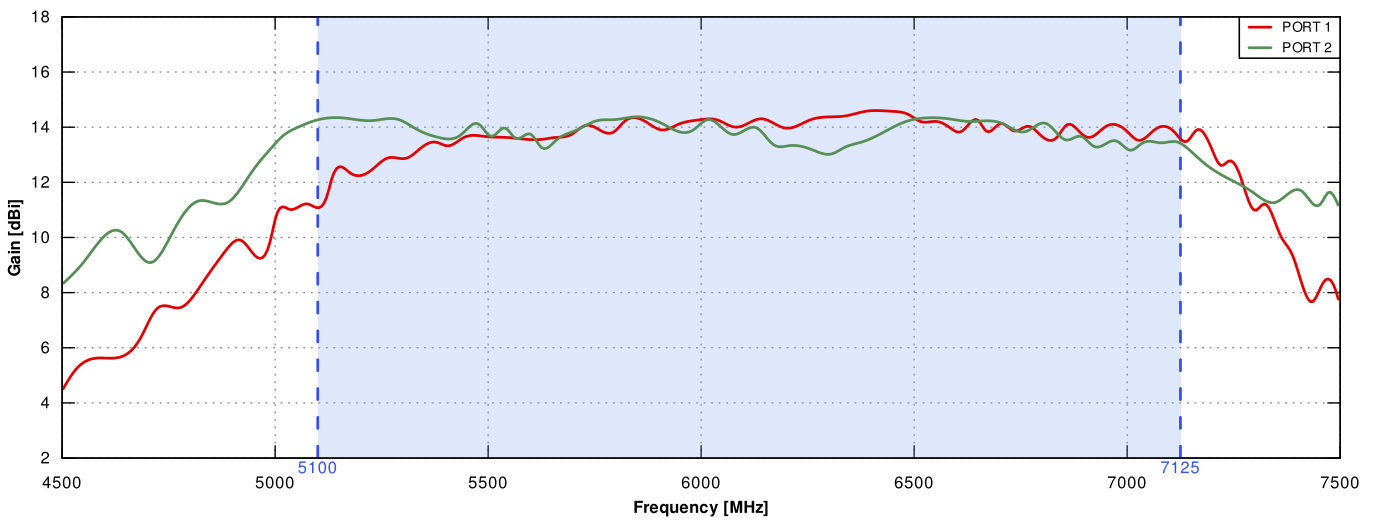

PORT 1&3 From 5.1GHz to 6.9GHz

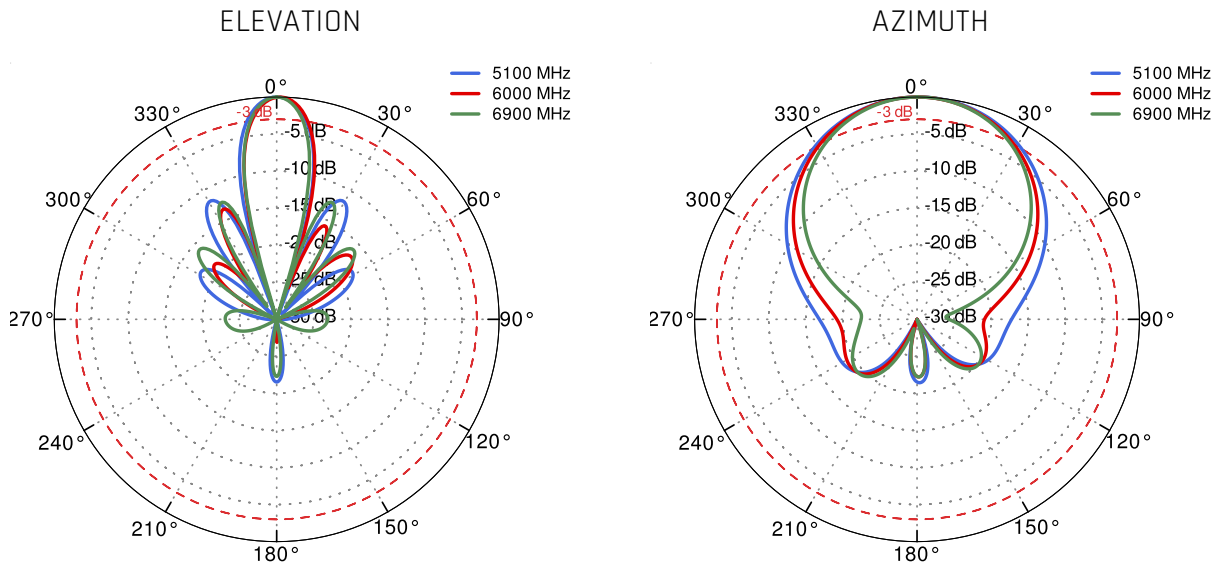

PORT 2&4 From 5.1GHz to 6.9GHz

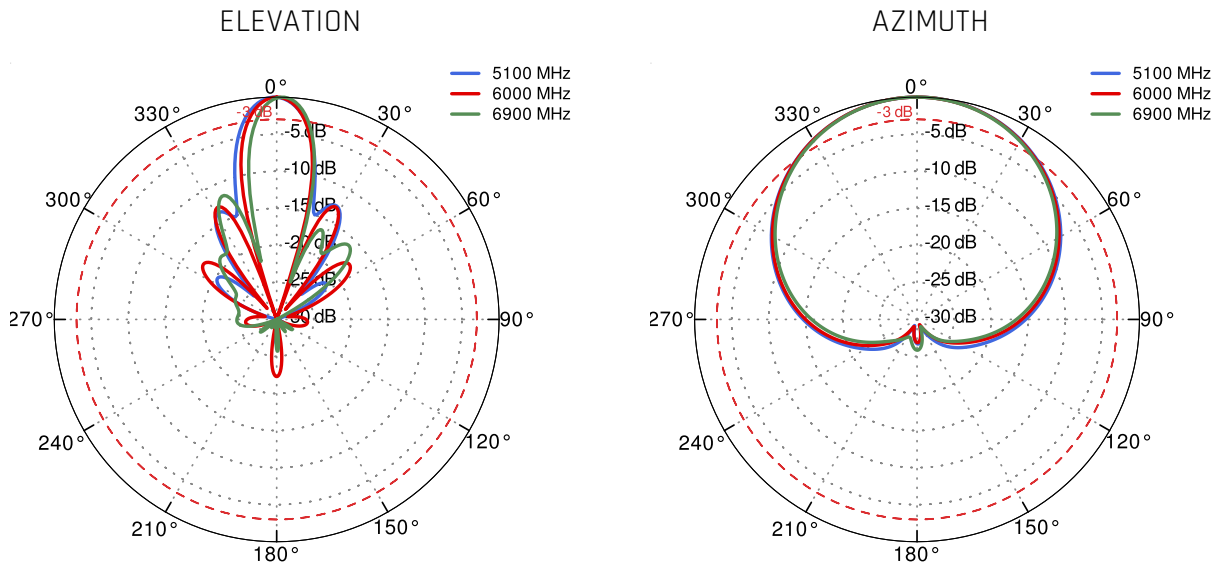

DIMENSIONS

