

# QuSector S57-14HV-90-4 Nf

QuSector S57-14HV-90-4 offers a 90 degrees, 14dBi gain signal with four Nf connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector S57-14HV-90-4 Nf is a concurrent, Wi-Fi 6e / 7, H&V polarity, MIMO 4x4 panel antenna. It simultaneously operates at **5.1GHz** and **7.125GHz** with **14dBi gain**. Due to its high gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions.

The antenna comes with integrated Nf connectors.

**Wi-Fi 6E**

5GHz



14 dBi



DIRECTIONAL



IP 67



-40° TO +80°



4x4 MIMO



OUTDOOR ANTENNA WORKS IN **ANY**  
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER



WALL OR MAST MOUNTING SYSTEM  
WITH **TWO PLANES, 60 DEGREES**  
REGULATION



MADE IN **EUROPE**



## WI-FI SPECIFICATION

FREQUENCY	5.1 - 7.125GHz
GAIN	14 dBi
VSWR	< 2.00
BEAMWIDTH	90°/16°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 $\Omega$
FRONT-TO-BACK	> 25dB
MAX INPUT POWER	50W
DC GROUND	Yes

## MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xNf
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

## MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 66mm 0.98-2.60 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
MOUNTING PLACE	Wall or ceiling or mast


## COMPATIBLE ROUTERS

VARIANT: SS57.14HV.90.4NF


RAJANT	BreadCrumb ES1-5050CS, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1-2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS
CISCO	AIR-CAP1532E, Catalyst IW9165E
DIGI	TX64
EXTREME NETWORKS	AP3000X
MIKROTIK	L23UGSR-5HaxD2HaxD
RAJANT	BreadCrumb ES1-5050CS, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1-2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS

## PLOTS


VSWR

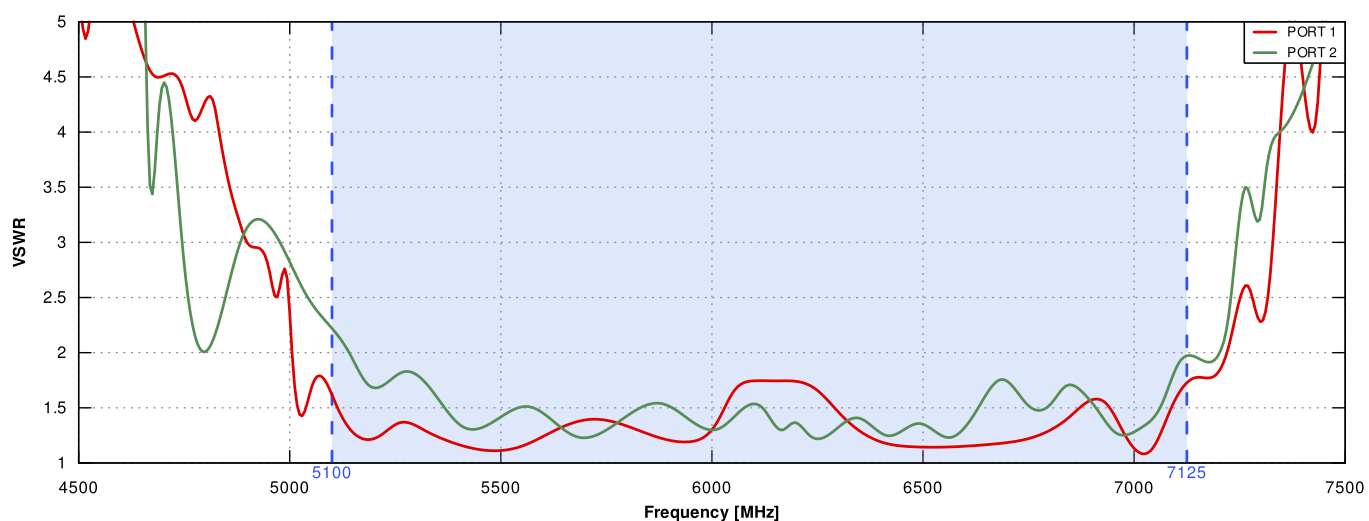


Gain

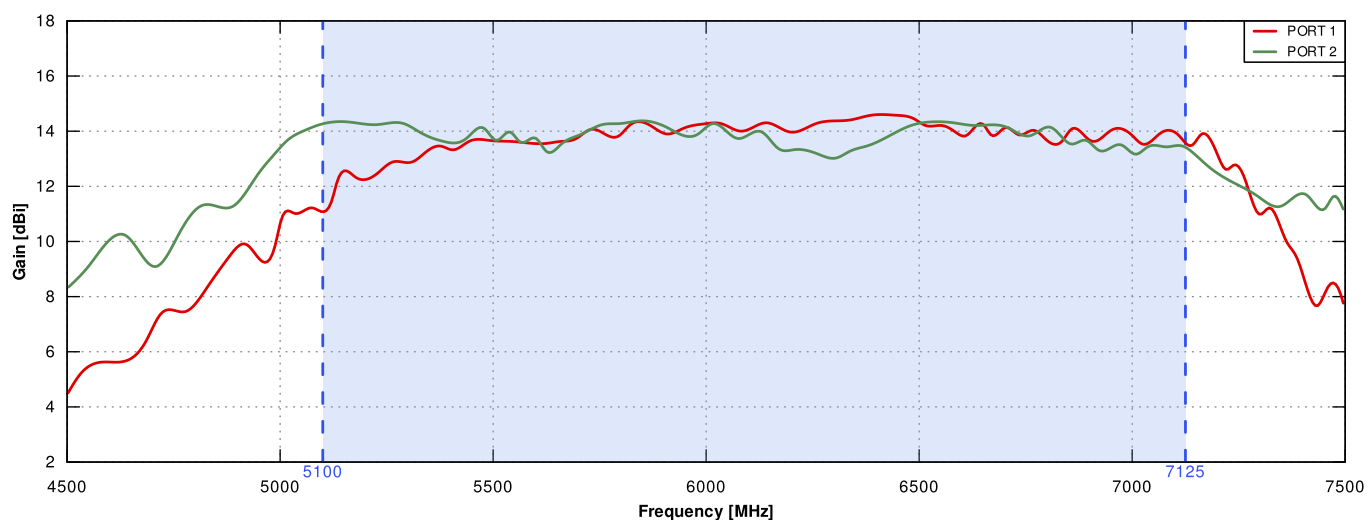

## PORT 1&3 From 5.1GHz to 6.9GHz

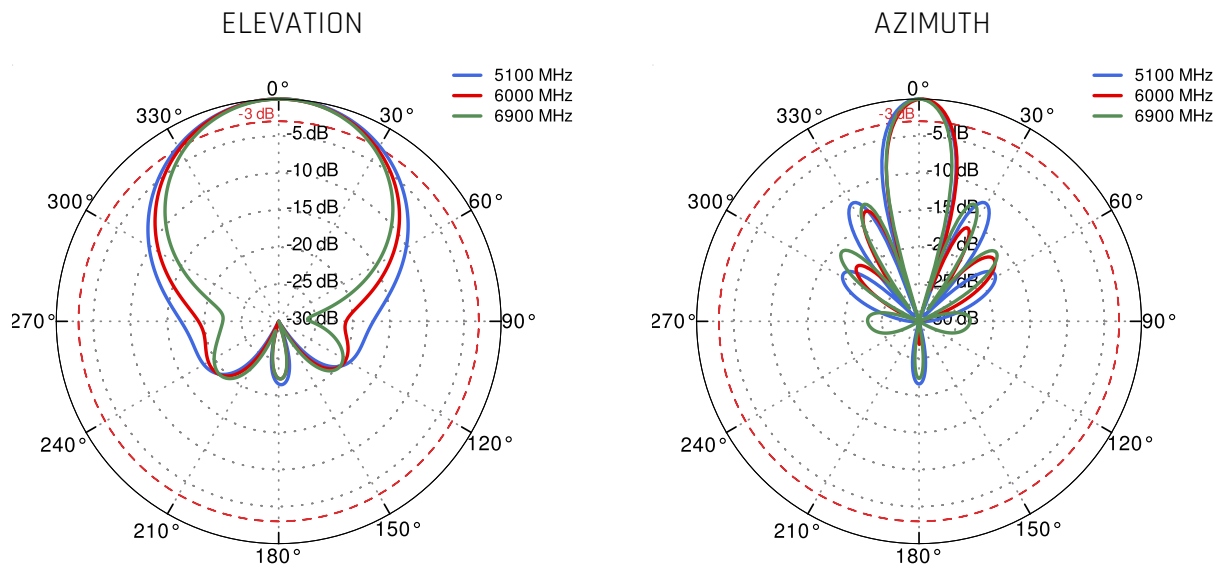

## PORT 2&4 From 5.1GHz to 6.9GHz

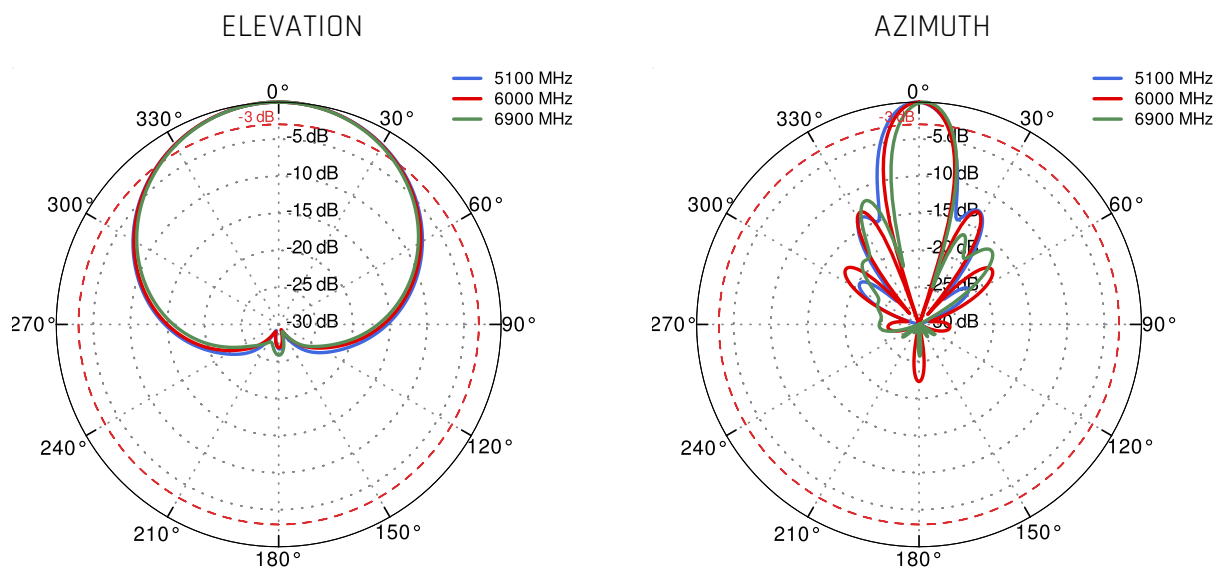

## DIMENSIONS

