
QuSpot for Teltonika RUT360/RUT361

Integrated multi-band LTE omni antennas + WiFi omni antennas + place to install Teltonika RUT360/RUT361 (All-in-one)

QuSpot omni LTE antenna for Teltonika **RUT360/RUT361** router is a perfect outdoor device for mobile and fixed installations like industrial, CCTV, hotspots, yachts, boats, campers, RV etc. **It has embedded also omni Wi-Fi antennas**. If you use **RUT360/RUT361** with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

4G LTE | Wi Fi DUALBAND 2.4GHz 5GHz | 617-6000MHz | 4 dBi | OMNI DIRECTIONAL | IP 68 | -40° TO +80°

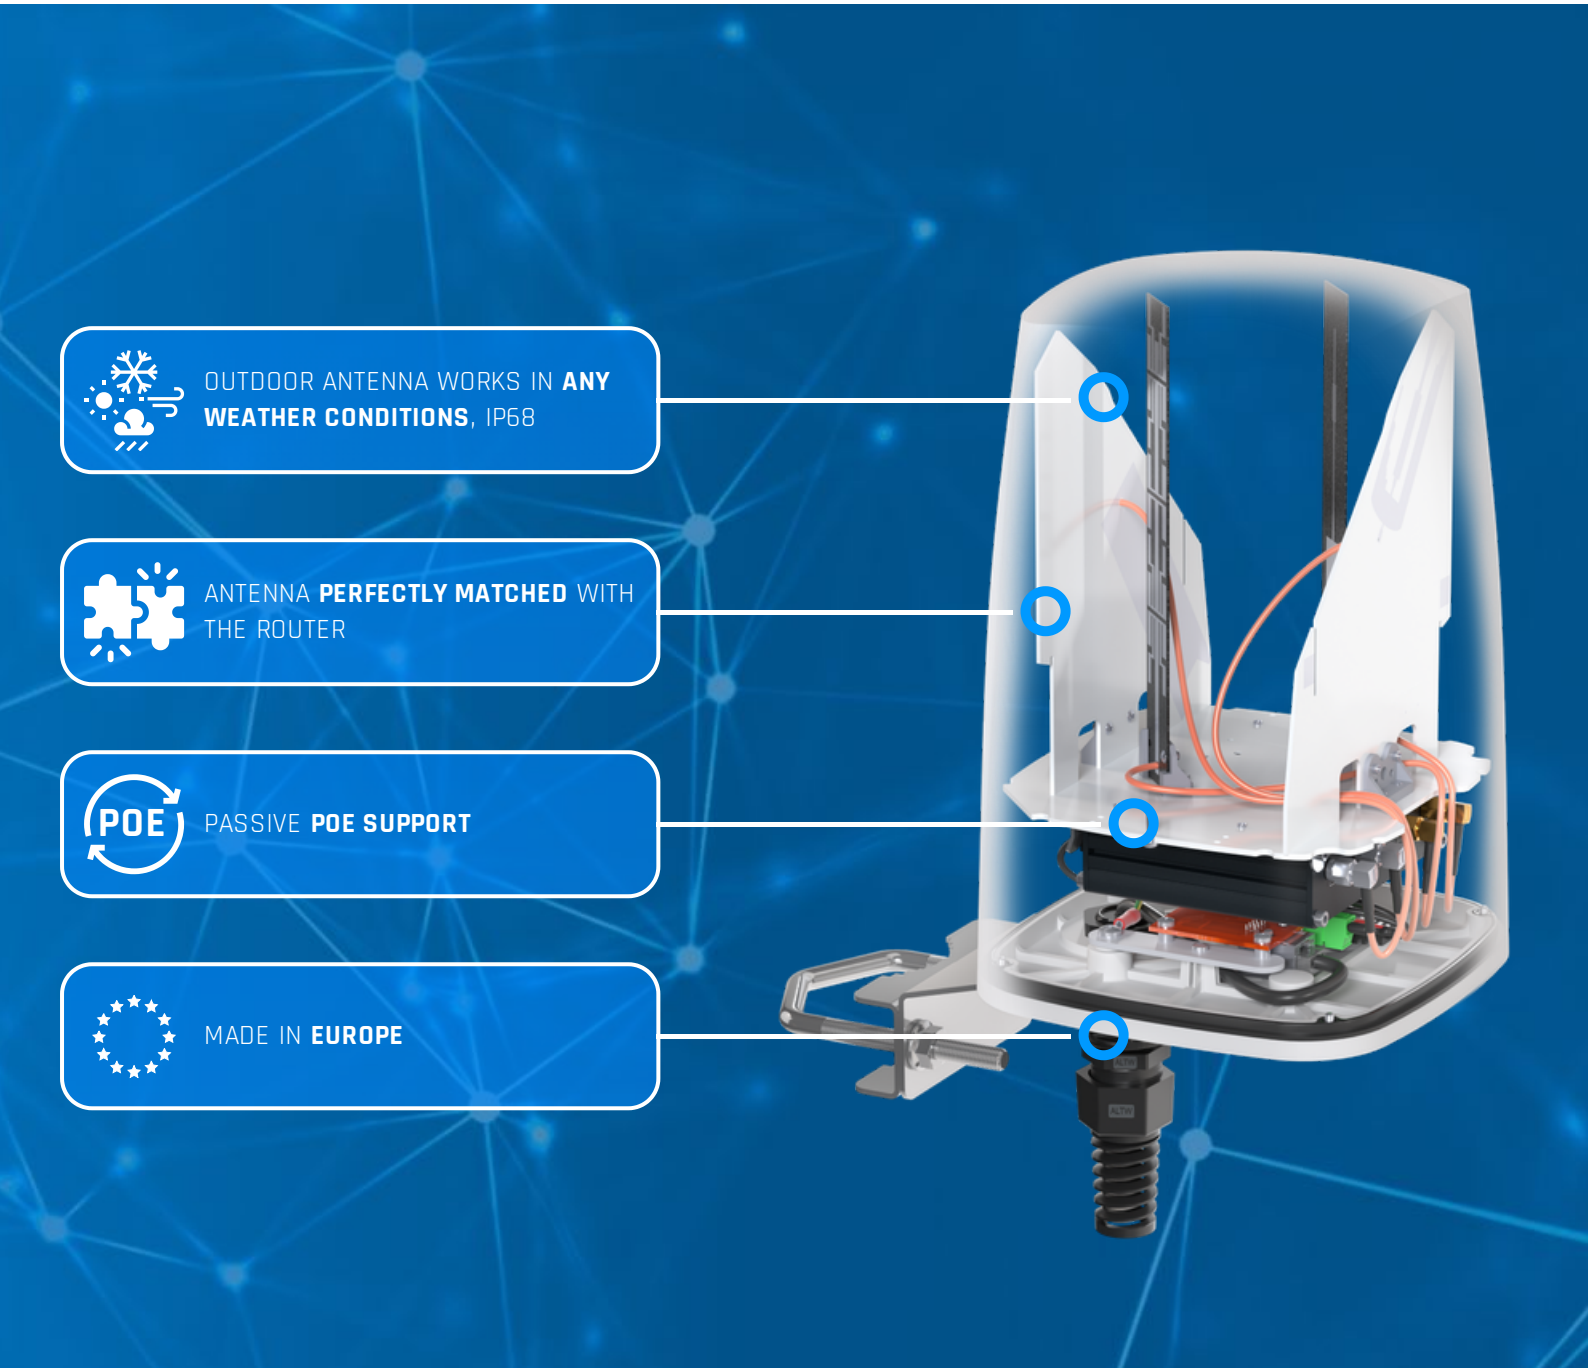

5G/LTE ANTENNA SPECIFICATION

FREQUENCY	0.617 - 0.960 GHz 1.6 - 3.0 GHz 3.0 - 5.0 GHz 5.0 - 6.0 GHz
MAX. GAIN	0.617 - 0.960 GHz : 2 dBi 1.6 - 3.0 GHz : 4 dBi 3.0 - 5.0 GHz : 4 dBi 5.0 - 6.0 GHz : 2 dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 54, 65, 66, 67, 68, 69, 70, 71, 85, 103, 106, 111, 252, 254, 256
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n54, n65, n66, n67, n68, n70, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n99, n100, n101, n106, n252, n254, n256
VSWR	<2.00, max <3.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
MAX. GAIN	2.4 - 2.5 GHz : 6 dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
VSWR	< 1.50, max < 2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

RADOME MATERIAL	UV-resistant ASA
OPERATING HUMIDITY	up to 100% RH
MATERIALS	aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	159 x 159 x 242 ± 10 mm 6.25 x 6.25 x 9.53 ± 0.39 inch
NET WEIGHT	1,25 ± 0.2 kg 2.75 ± 0.44 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.5 - 0.7 Nm
MAST DIAMETER	25-66 mm 0.98-2.60 inch


FREQUENCY BANDS

LTE / 4G GSM	694 MHz	5	6	8	12	13	14	17	960 MHz
		18	19	20	26	27	28	29	
		44	67	68	85	n81	n82	n83	
		n89							
LTE / 4G UMTS	1710 MHz	1	2	3	4	9	10	25	2170 MHz
		33	34	35	36	37	39	59	
		62	n80	n84	n86	n95			
LTE / 4G WCS DARS	2300 MHz	30	40						2400 MHz
LTE / 4G	2400 MHz	7	38	41	53	69	n90		2700 MHz


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PLOTS

VSWR for Wi-Fi antenna

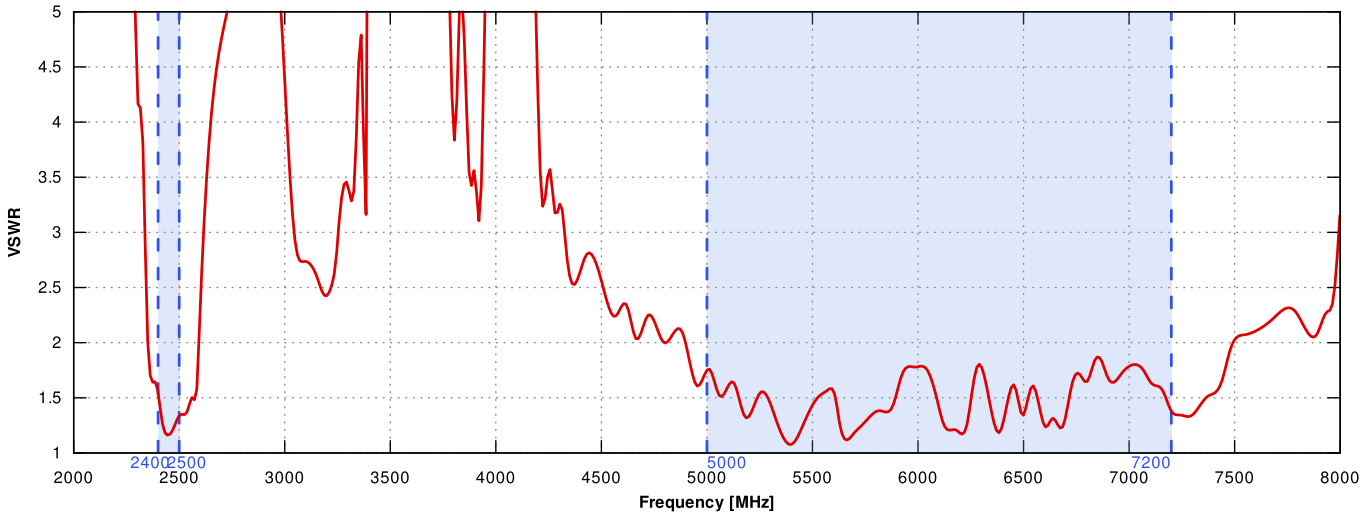


VSWR for 5G/LTE antenna

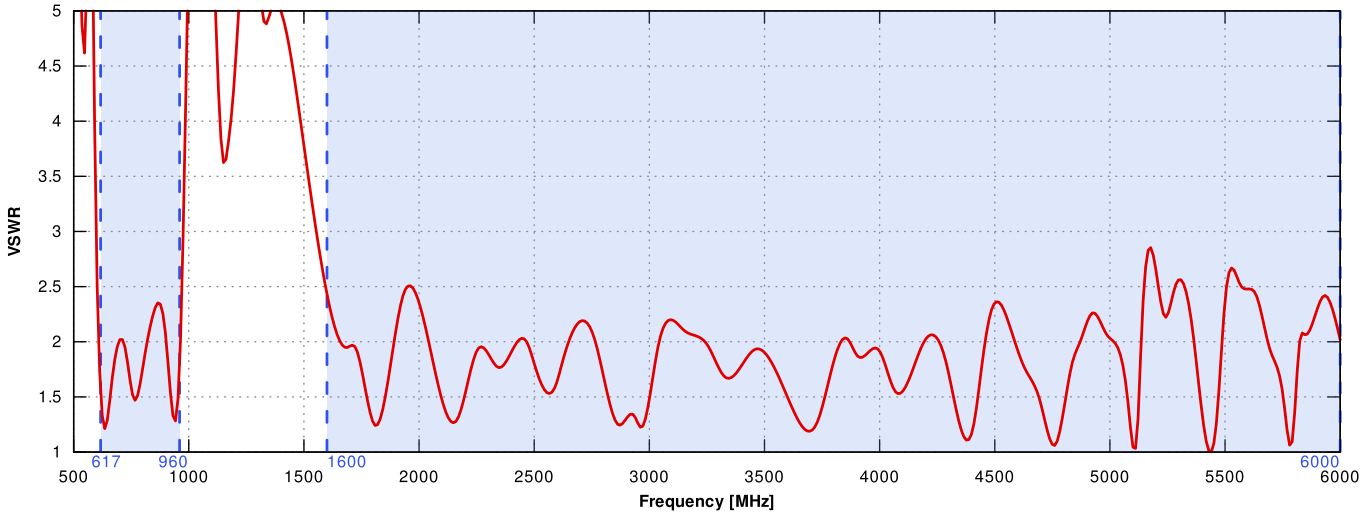


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

Gain for Wi-Fi antenna

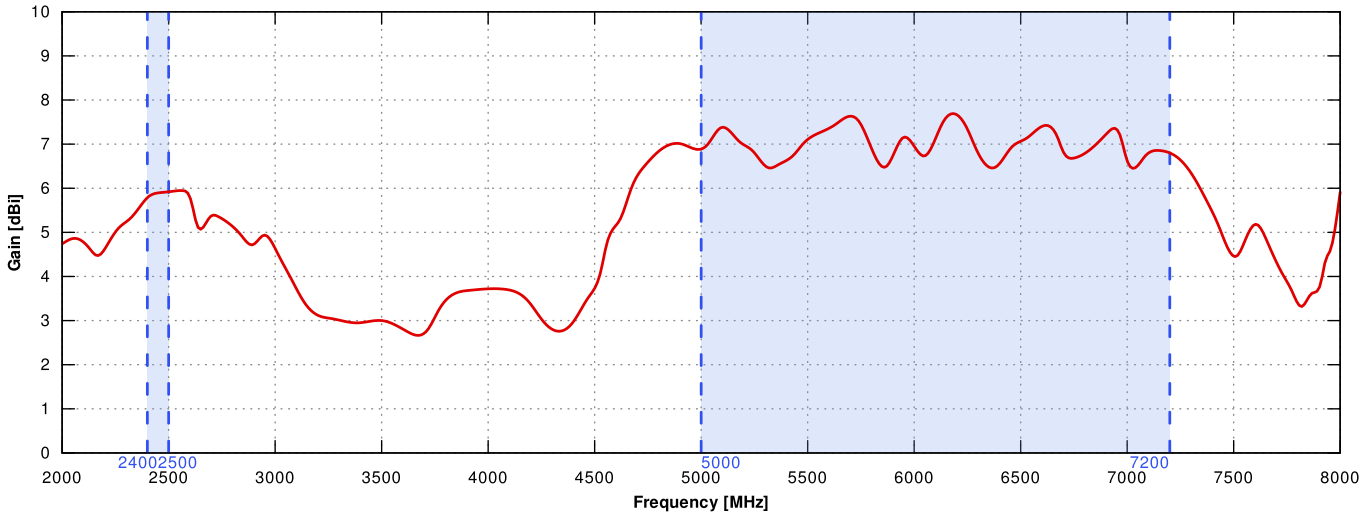


Gain for 5G/LTE antenna

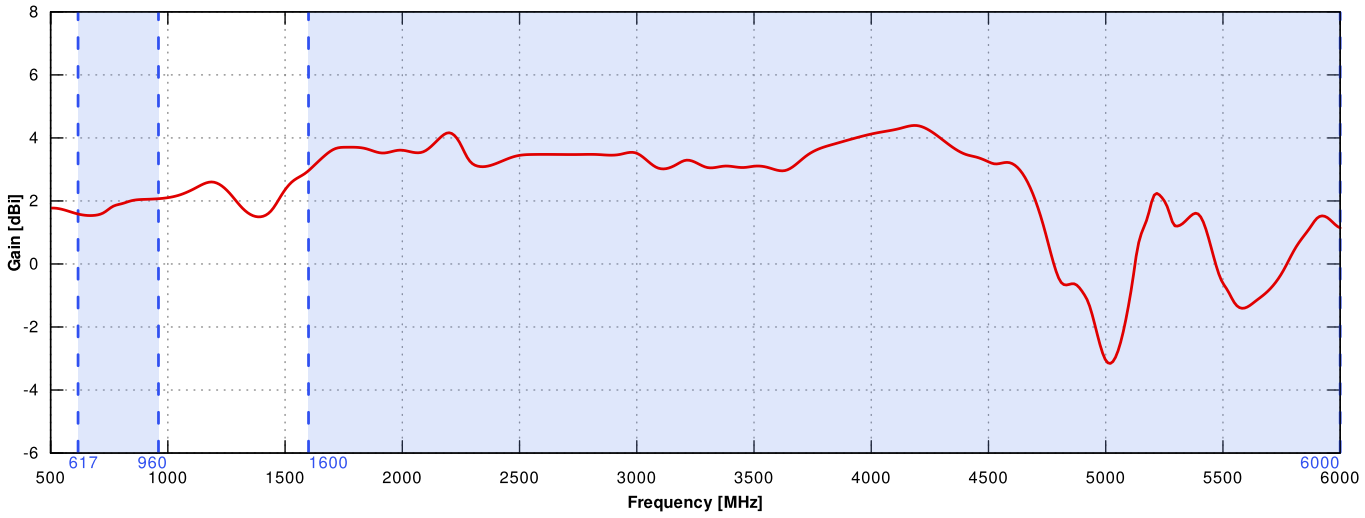


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

5G/LTE From 650MHz to 950MHz

ELEVATION

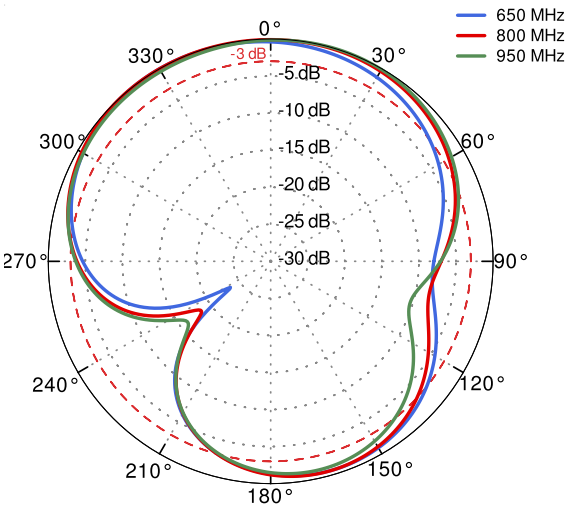


AZIMUTH

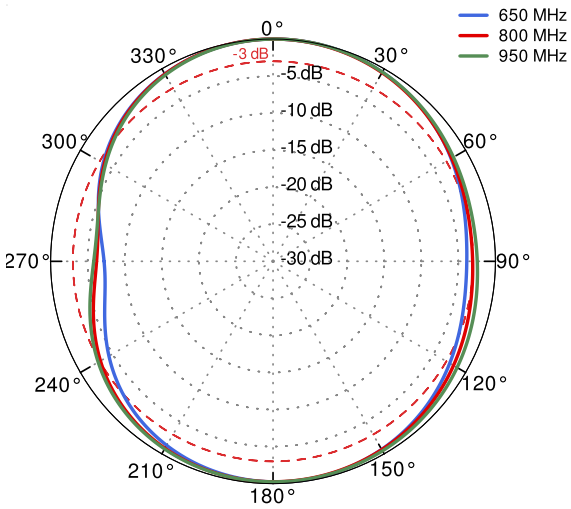


5G/LTE From 1710MHz to 2500MHz

ELEVATION

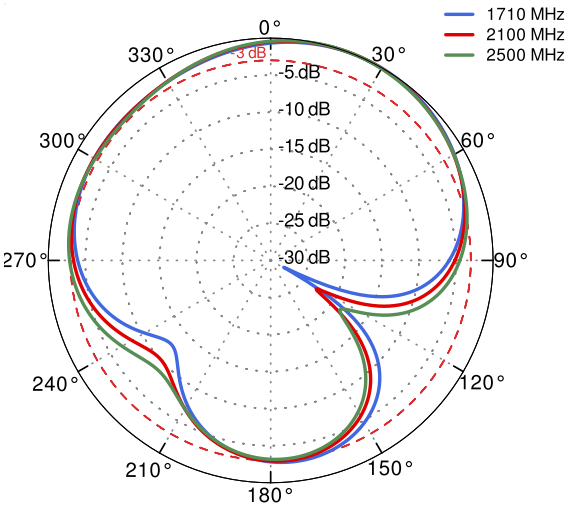


AZIMUTH

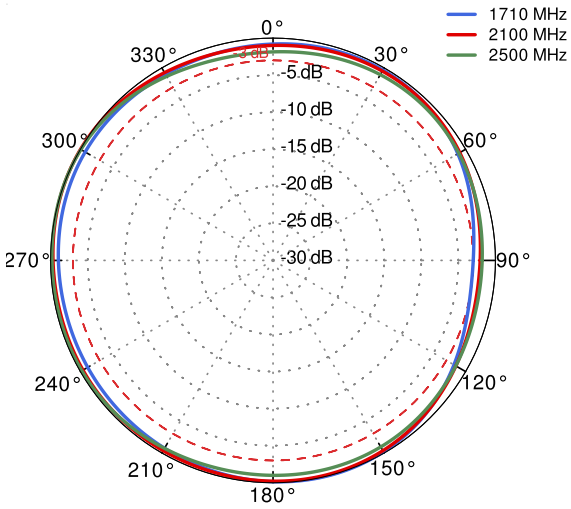


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

5G/LTE From 3300MHz to 4000MHz

ELEVATION

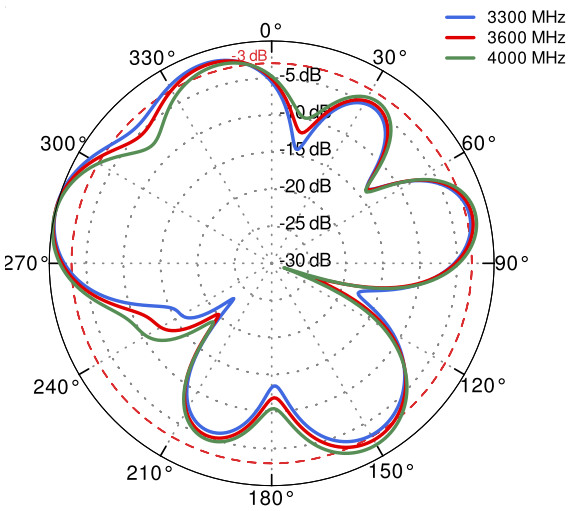


AZIMUTH

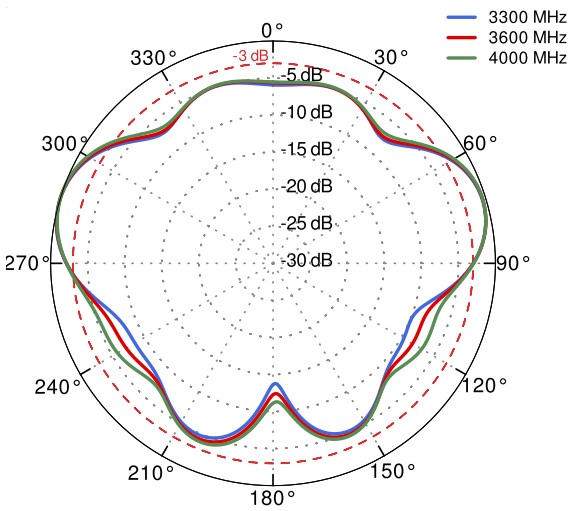


5G/LTE From 4500MHz to 5500MHz

ELEVATION

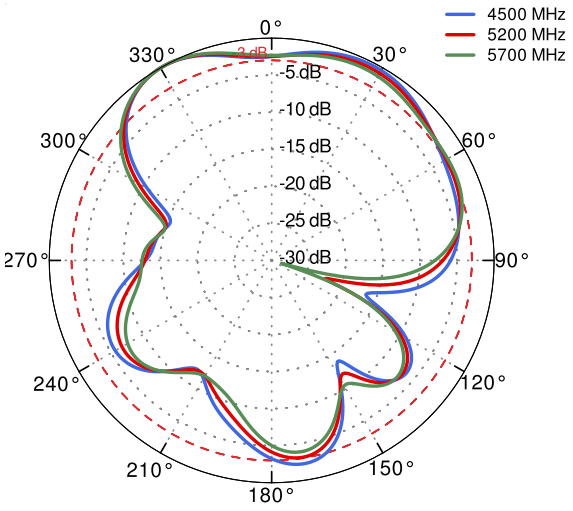


AZIMUTH

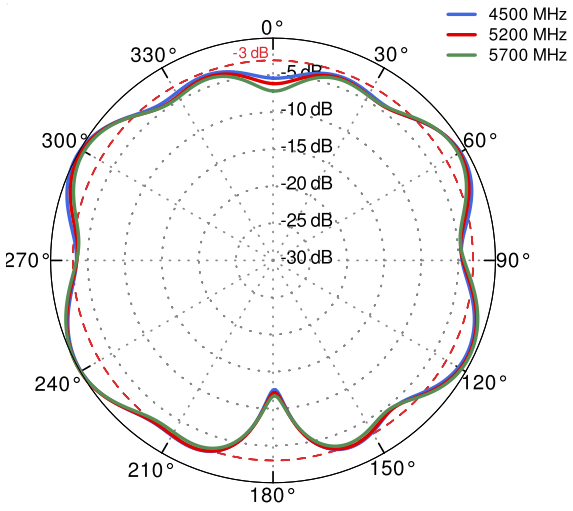


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

Wi-Fi 2.4GHz and 5GHz


ELEVATION

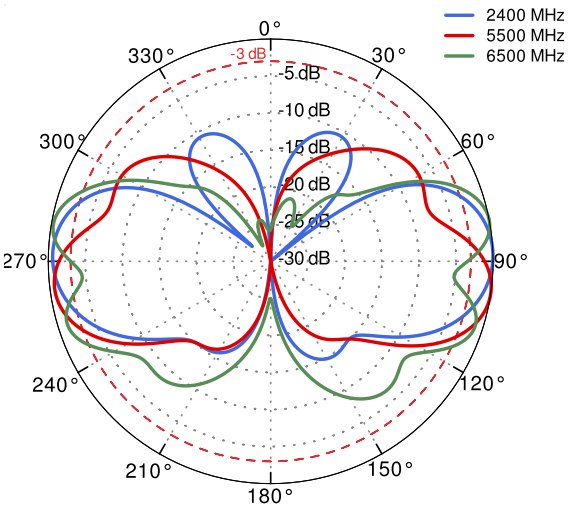


AZIMUTH

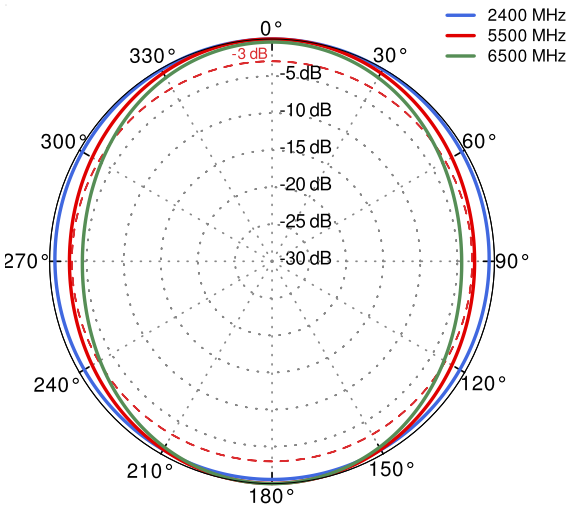

DIMENSIONS

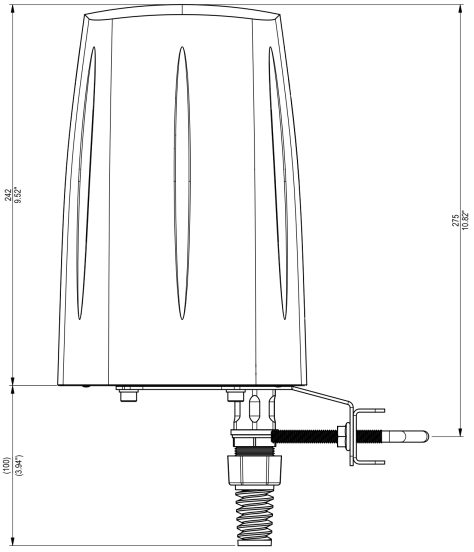

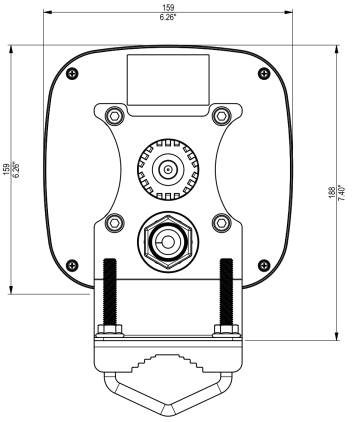

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.