QuSpot for MikroTik RBM11G | LTE

Integrated multi-band LTE omni antenna + place to install MikroTik RBM11G (All-in-one)

QuSpot omnidirectional LTE 2x2 MIMO antenna for **MikroTik RBM11G** is a perfect outdoor device for mobile and fixed installations like CCTV, hotspots, industrial areas, campervans, ships etc. The set contains IP67 ASA enclosure, LTE antennas, RJ45 (Ethernet) port and mast/pole/wall mounting bracket.
If you use RBM11G with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

4G LTE | 694-2700MHz | 4 dBi | OMNI DIRECTIONAL | IP 68 | -40° TO +80°



LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n86, n89, n90, n95, n97, n98, n100, n101, n256
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
VSWR	<1.60, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

MECHANICAL SPECIFICATION

MATERIALS	ASA, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.5 - 0.7 Nm
MAST DIAMETER	25-66 mm 0.98-2.60 inch

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

FREQUENCY BANDS

LTE / 4G GSM	617 MHz	5	8	12	13	14	17	18	960 MHz
		19	20	26	27	28	29	44	
		67	68	85	103	n81	n82	n83	
		n89	100						
LTE / 4G UMTS	1710 MHz	1	2	3	4	9	10	25	2170 MHz
		33	34	35	36	37	39	n80	
		n84	n86	n95	n98	n101			
LTE / 4G WCS DARS	2300 MHz	30	40	n97					2400 MHz
LTE / 4G	2400 MHz	7	38	41	53	69	n90		2700 MHz

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PLOTS

VSWR for LTE antenna

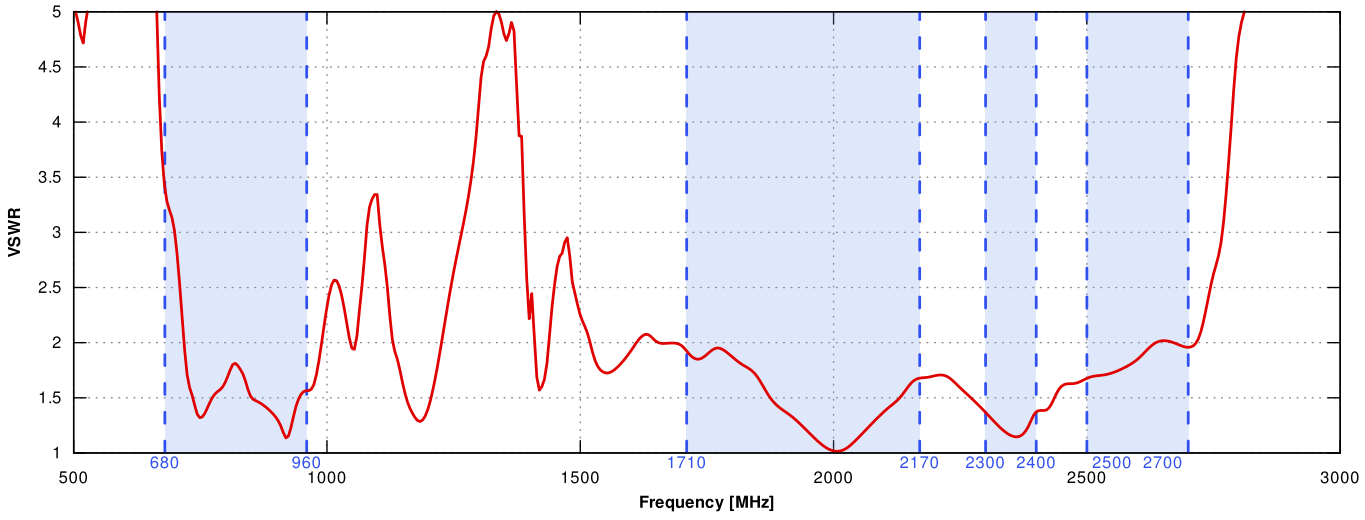

Gain for LTE antenna

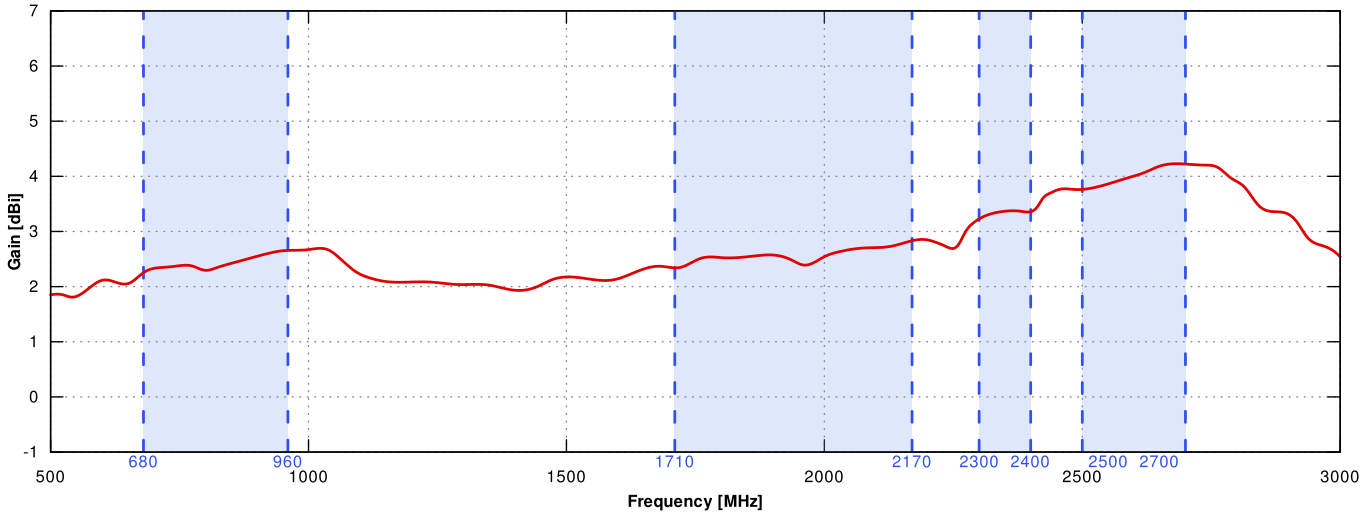

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

LTE from 700MHz to 900MHz

ELEVATION

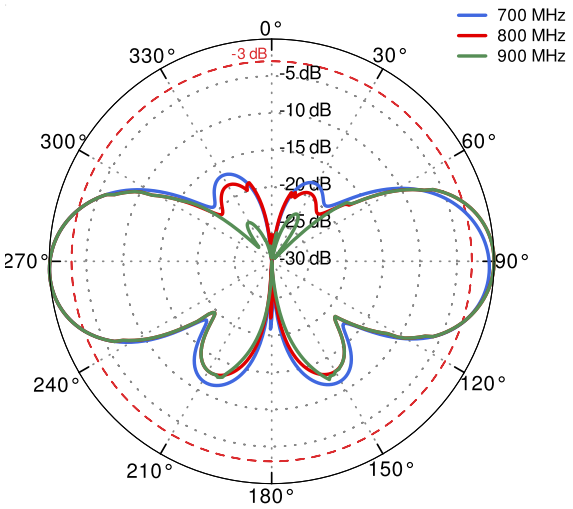

AZIMUTH

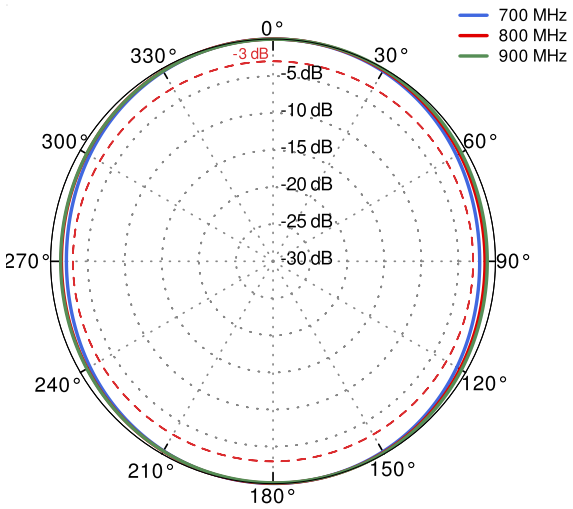

LTE from 1.71GHz to 2.17GHz

ELEVATION

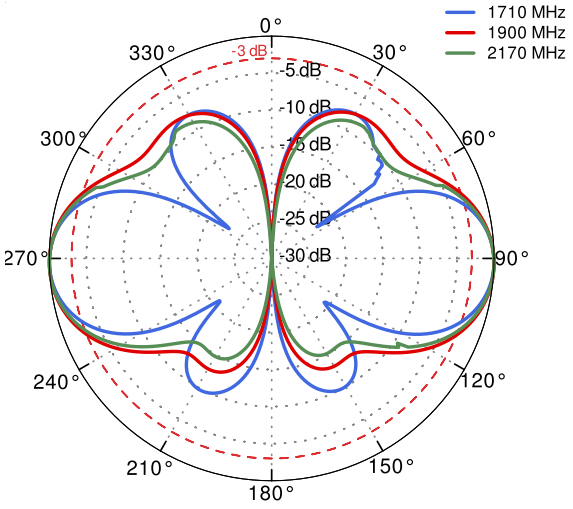

AZIMUTH

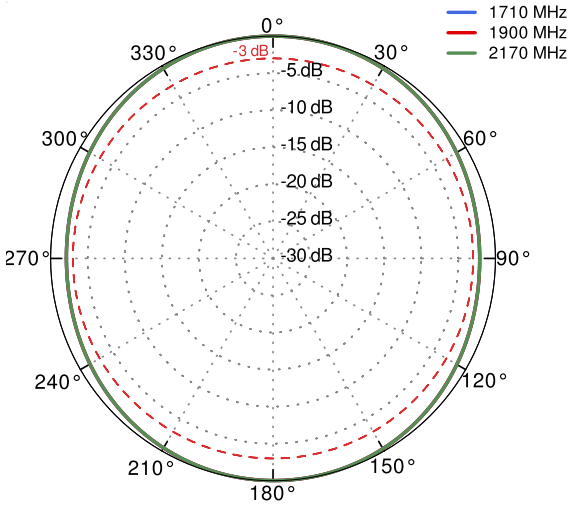

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

LTE from 2.3GHz to 2.7GHz

ELEVATION

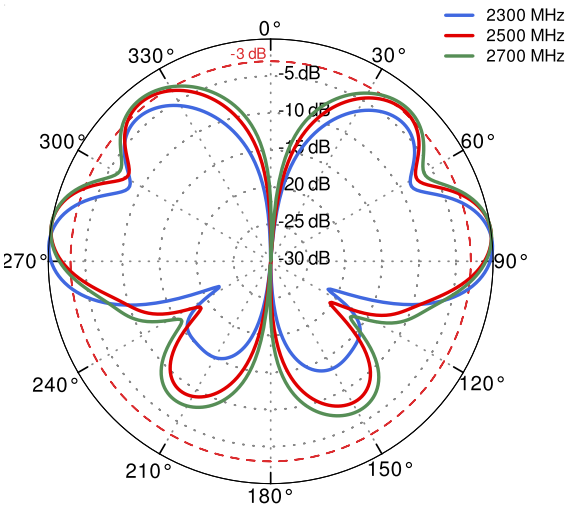

AZIMUTH

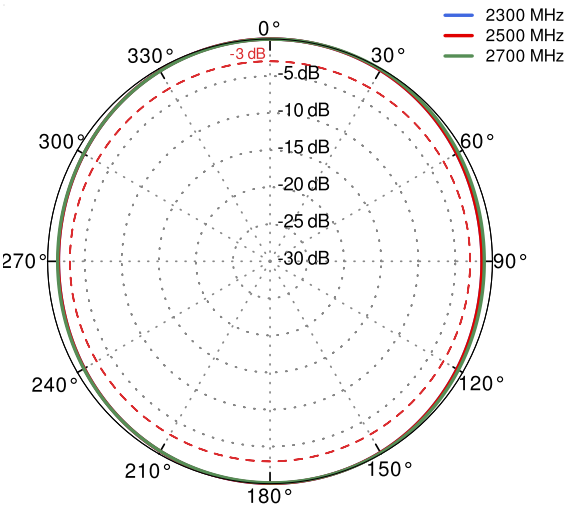

DIMENSIONS

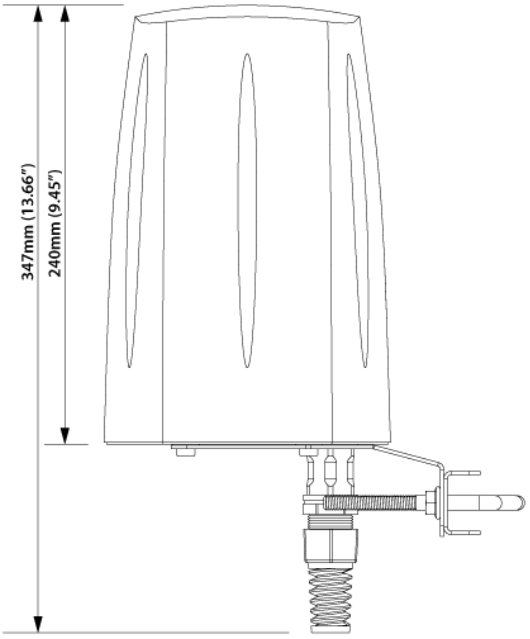

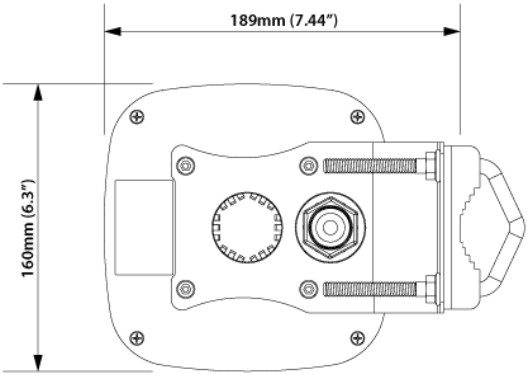

QuWireless
WWW.QUWIRELESS.COM
Sales email: sales@quwireless.com **Tel:** +48 513 900 416
Support email: support@quwireless.com **Website:** www.quwireless.com
Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.