QuSpot for Semtech / Sierra Wireless RV55

Integrated multi-band LTE omni antenna + WiFi omni antenna + GPS antenna + place to install Semtech / Sierra Wireless RV55 (All-in-one)

QuSpot omni LTE antenna for Semtech / Sierra Wireless **RV55** router is a perfect outdoor device for mobile and fixed installations like industrial, CCTV, hotspots, yachts, boats, campers, RV etc. It also has embedded Wi-Fi dualband 2.4 & 5 GHz omni antenna, GPS antenna and Bluetooth antenna. If you use **RV55** with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.
The set contains a Passive PoE splitter, allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection. **NOTE:** should only be used with a 24V (or lower voltage) Passive PoE power supply it is not compatible with an 802.3af/at power source!

4G LTE | Wi Fi DUALBAND 2.4GHz 5GHz | GPS | 694-2700MHz | 7 dBi | OMNI DIRECTIONAL | IP 68 | -40° TO +80°C

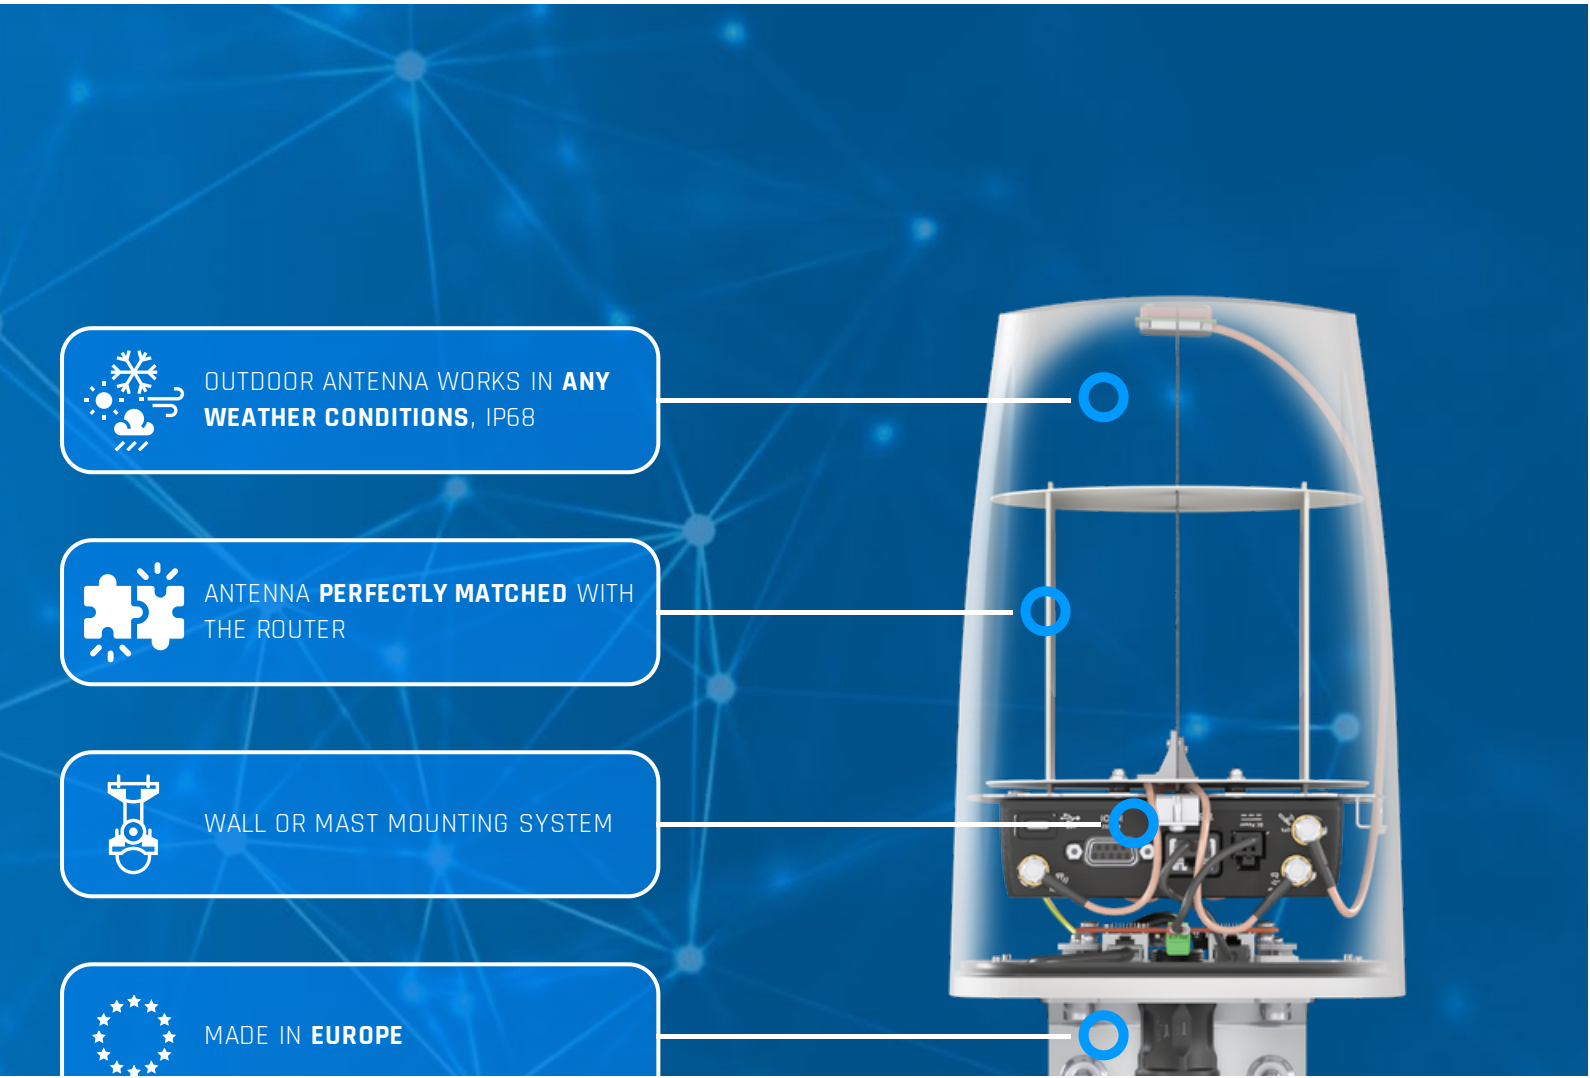

LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
VSWR	<1.60, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 4.7 - 6 GHz
GAIN	2.4 - 2.5 GHz : 6 dBi 4.7 - 6 GHz : 7 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

POE SPECIFICATION

POE TYPE	Passive PoE up to 24V, not compatible with an 802.3af/at power source!
POE IN MODE	Mode type: B
IEEE STANDARD	IEEE 802.3ab 1000Base-T Gigabit Ethernet

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.5 - 0.7 Nm
MAST DIAMETER	25-66 mm 0.98-2.60 inch

FREQUENCY BANDS

5G / LTE GSM	694 MHz	5	6	8	12	13	14	17	960 MHz
		18	19	20	26	27	28	29	
		44	67	68	85	n81	n82	n83	
		n89							
5G / LTE UMTS	1710 MHz	1	2	3	4	9	10	25	2170 MHz
		33	34	35	36	37	39	59	
		62	n80	n84	n86	n95			
5G / LTE WCS DARS	2300 MHz	30	40						2400 MHz
5G / LTE	2400 MHz	7	38	41	53	69	n90		2700 MHz

PLOTS

VSWR for Wi-Fi antenna

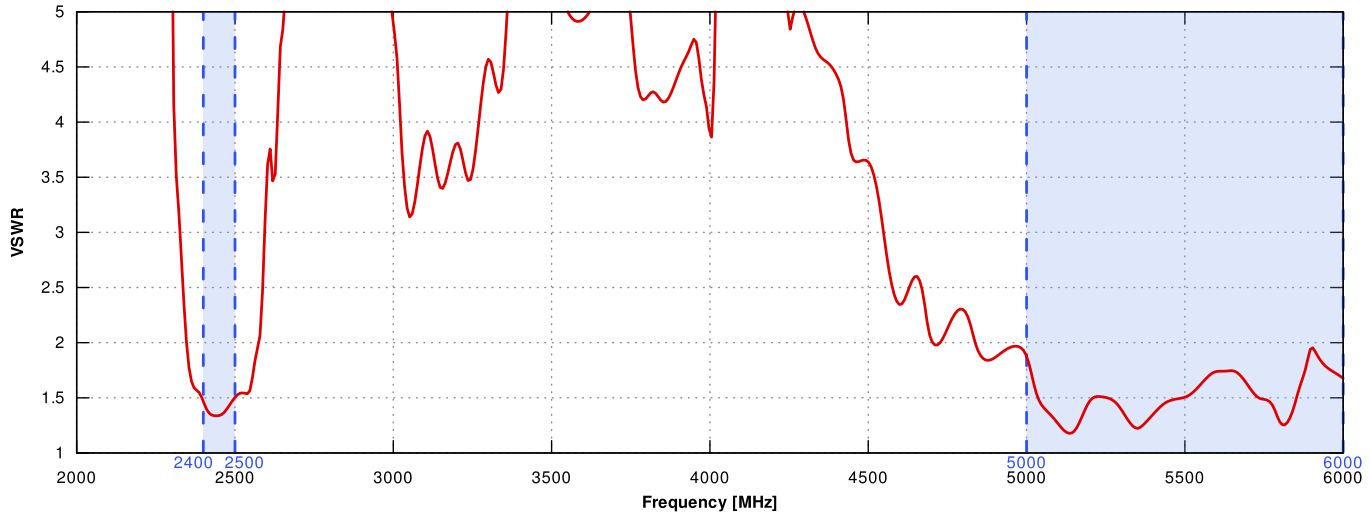

VSWR for LTE antenna

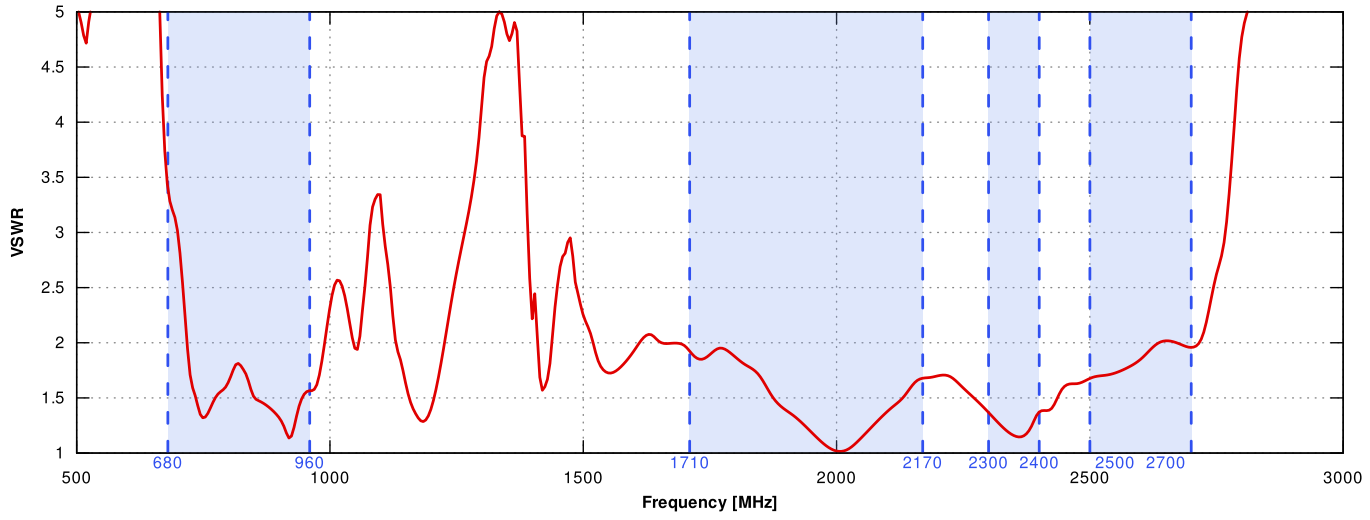

Gain for Wi-Fi antenna

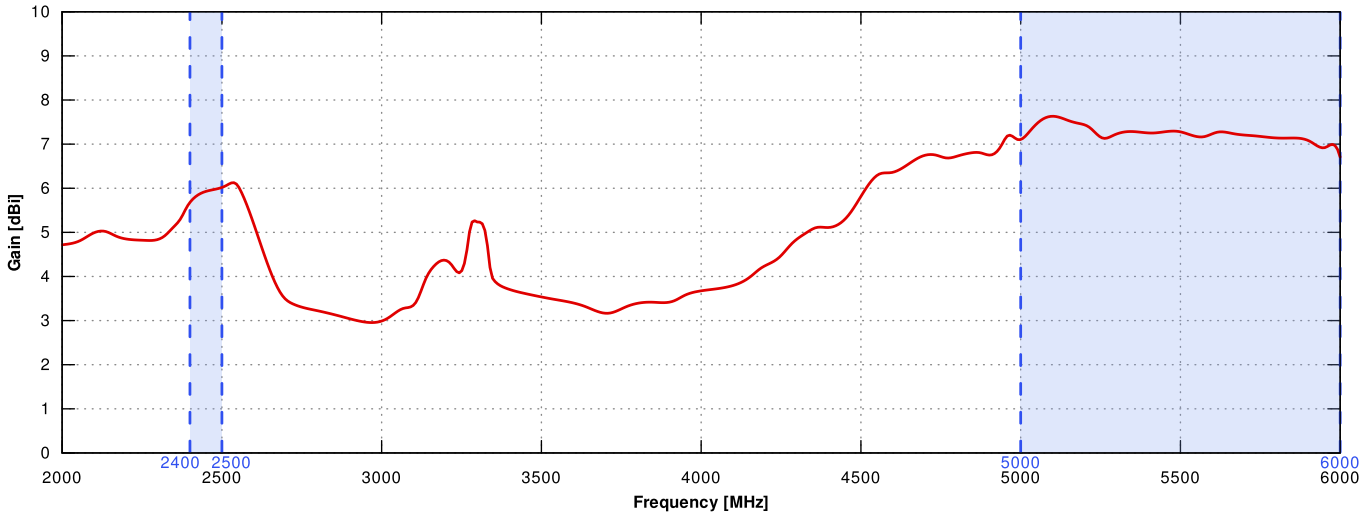

Gain for LTE antenna

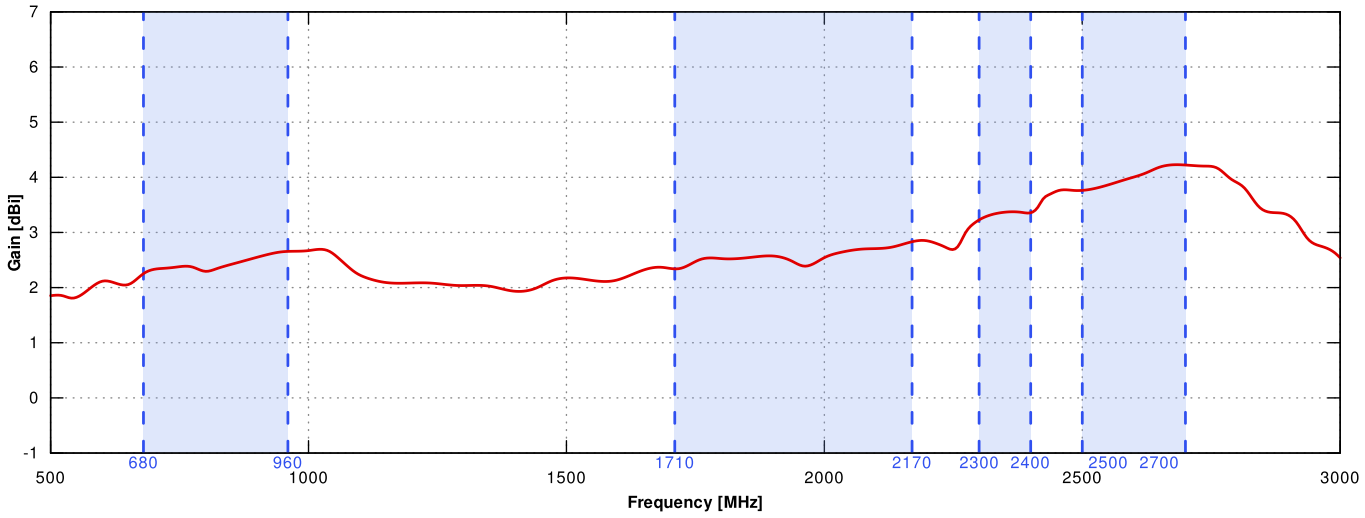

LTE from 700MHz to 900MHz

ELEVATION

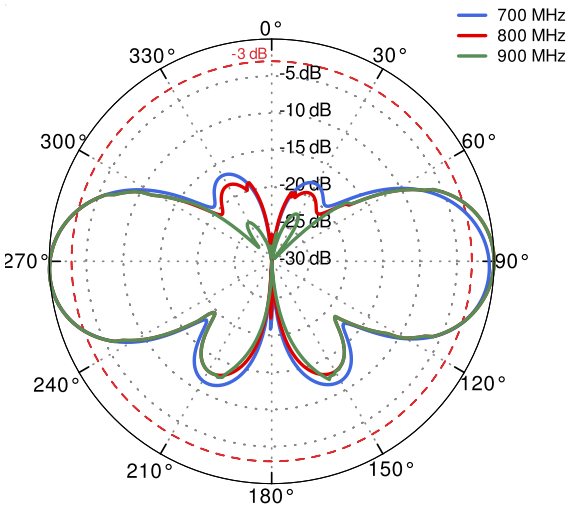

AZIMUTH

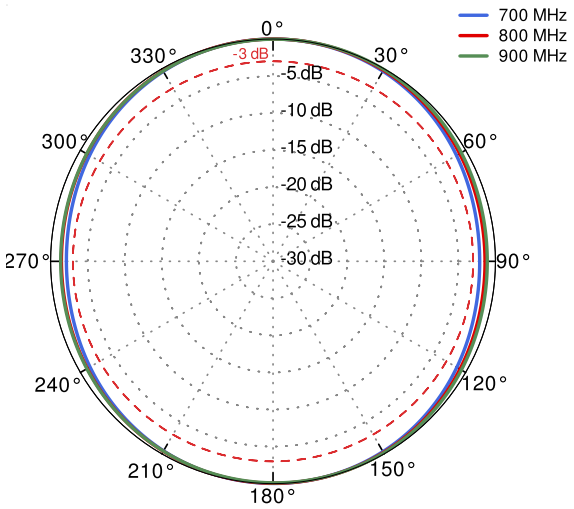

LTE from 1.71GHz to 2.17GHz

ELEVATION

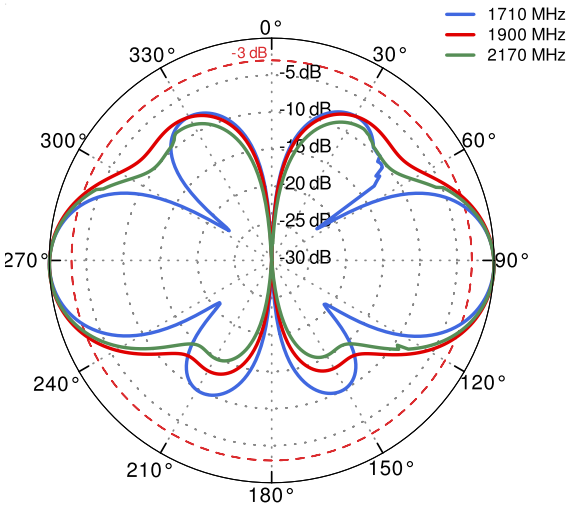

AZIMUTH

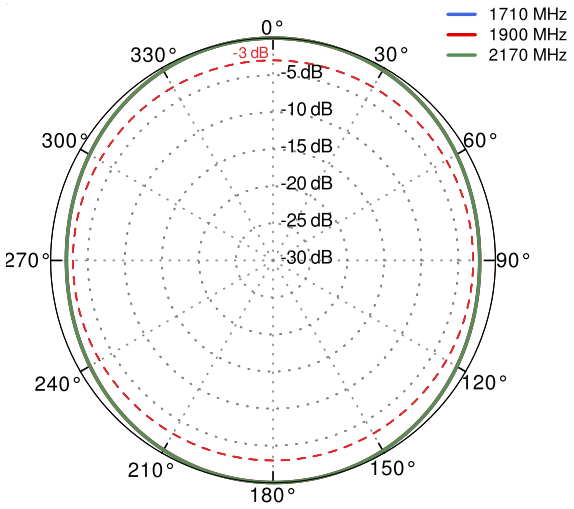

LTE from 2.3GHz to 2.7GHz

ELEVATION

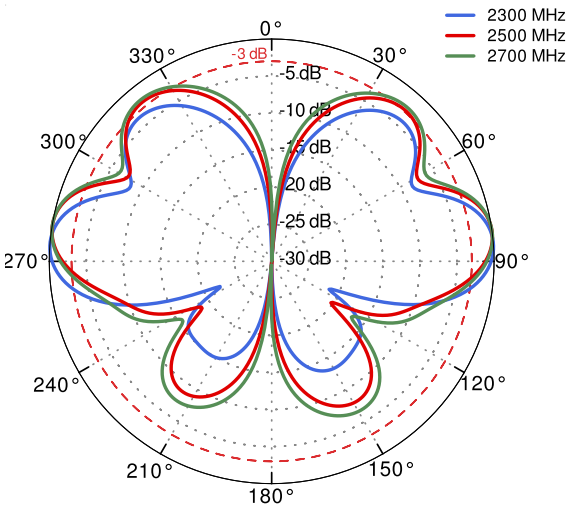

AZIMUTH

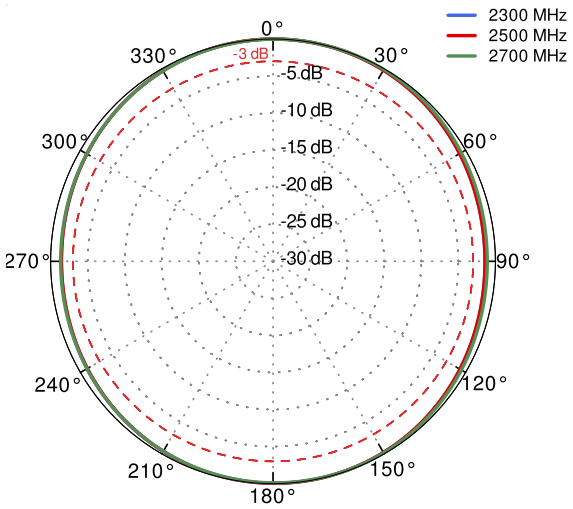

Wi-Fi 2.4GHz and 5GHz

ELEVATION

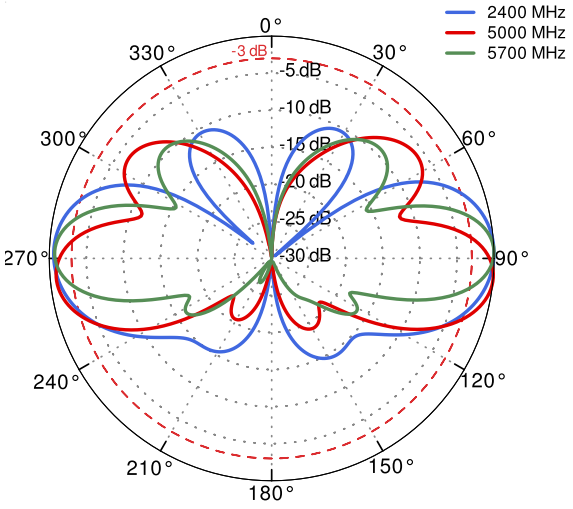

AZIMUTH

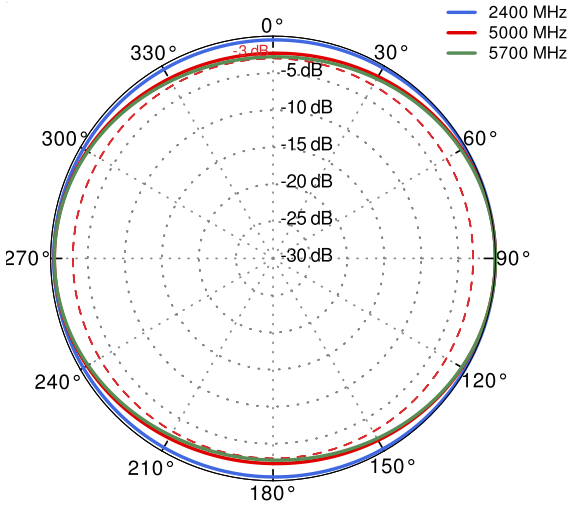

DIMENSIONS

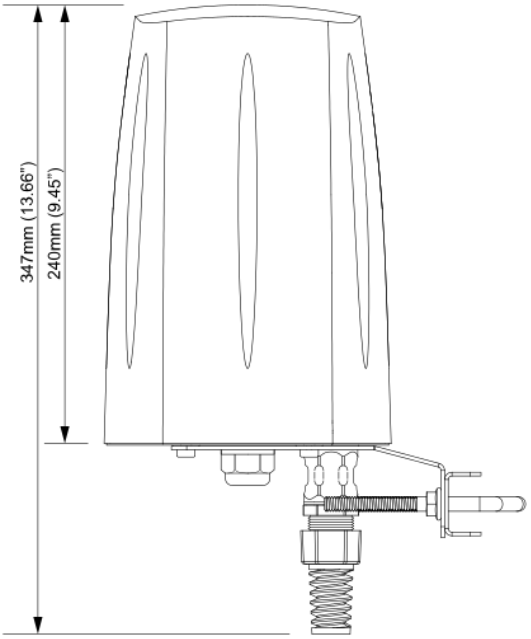

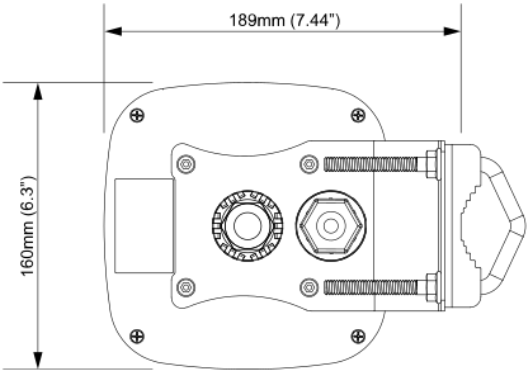

WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com **Tel:** +48 513 900 416

Support email: support@quwireless.com **Website:** www.quwireless.com

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland