


QuSpot for Teltonika RUTX50 2xRJ45 1xQuPS2

INTEGRATED MULTI-BAND LTE & 5G OMNI ANTENNA + WI-FI OMNI ANTENNA + GPS ACTIVE ANTENNA + PLACE TO INSTALL TELTONIKA RUTX50/RUTM51/RUTM54/RUTM55 (ALL-IN-ONE)

QuSpot for RUTX50/RUTM51/RUTM54/RUTM55 is an outdoor antenna designed to provide reliable wireless connectivity in a variety of environments. This product is an all in one solution that integrates a high gain omnidirectional 5G and Wi-Fi antennas with RUTX50, RUTM51, RUTM54, RUTM55 into a single IP67 enclosure. Such integration allows implementation of new outdoor 5G solutions.

QuSpot for RUTX50/RUTM51/RUTM54/RUTM55 is an ideal solution for outdoor wireless connectivity in moving applications such as transportation, yachting, boats and camping but also city centres with high signal density.




OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



MADE IN **EUROPE**

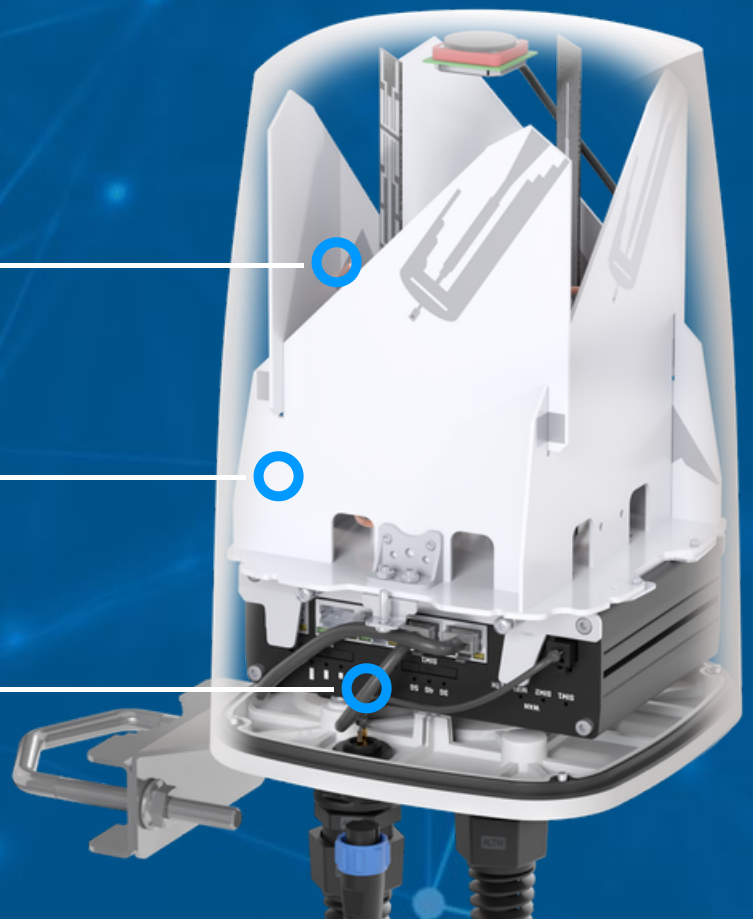

5G ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
GAIN	617 - 960 MHz : 2 dBi 1.7 - 2.7 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 GHz : 2 dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 65, 66, 67, 68, 69, 70, 71, 74, 75, 76, 85, 103, 106, 111, 252, 253, 254, 255, 256
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n24, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n50, n51, n53, n54, n65, n66, n67, n68, n70, n71, n74, n75, n76, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n91, n92, n93, n94, n95, n97, n98, n99, n100, n101, n106, n109, n110, n250, n251, n252, n253, n254, n255, n256
VSWR	<2.00, max <2.50
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	4x SMA
CABLE TYPE	RG316

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 4.7 - 6 GHz
GAIN	2.4 - 2.5 GHz : 6 dBi 4.7 - 6 GHz : 7.5 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	2x RPSMA
CABLE TYPE	RG316

GPS ACTIVE ANTENNA SPECIFICATION

FREQUENCY	1.56 - 1.61 GHz
VSWR	< 2
GAIN	3 dBi
GAIN 3V	28 dBi
DC POWER INPUT	2.5 V ~ 6.5 V
POWER CONSUMPTION	2.5-6.5mA
IMPEDANCE	50 Ω
POLARIZATION	RHCP (right hand circularly polarized)

CONNECTOR

1x SMA

CABLE TYPE

RG174

 **MECHANICAL SPECIFICATION****MATERIALS**

ABS, aluminum, PTFE

CONNECTOR2 x RJ45
1 x QuPS2**INGRESS PROTECTION**

IP67

DIMENSIONS159 x 159 x 242 ± 10 mm
6.25 x 6.25 x 9.53 ± 0.39 inch**NET WEIGHT**1,43 ± 0.2 kg
3.15 ± 0.44 lbs**VENT AIR PERMEABILITY**

> 1000ml/min @70mbar

OPERATING TEMPERATUREFrom -40°C to 75°C
From -40°F to 167°F**MAST DIAMETER**25-66 mm
0.98-2.60 inch**INCLUDED BRACKET WIND SURVIVAL**

≤190 km/h


OPTIONAL BRACKET WIND SURVIVAL (2X U-BOLT)

≤220 km/h

ENCLOSURE RECOMMENDED TIGHTENING TORQUE


0.6 - 0.8 Nm

FREQUENCY BANDS



1	2	3	4	5	6	7
8	9	10	11	12	13	14
17	18	19	20	21	22	23
24	25	26	27	28	29	30
32	33	34	35	36	37	38
39	40	41	42	43	44	45
46	47	48	49	50	51	52
53	54	55	56	57	58	59
70	71	74	75	76	85	103
106	111	252	253	254	255	256

617 MHz 6000 MHz




	n1	n2	n3	n5	n7	n8	n12	
	n13	n14	n18	n20	n24	n25	n26	
	n28	n29	n30	n34	n38	n39	n40	
	n41	n46	n47	n48	n50	n51	n53	
61	n54	n65	n66	n67	n68	n70	n71	60
7	n74	n75	n76	n77	n78	n79	n80	00
M	n81	n82	n83	n84	n85	n86	n89	M
H	n90	n91	n92	n93	n94	n95	n97	Hz
Z	n98	n99	n100	n101	n106	n109	n110	
	n250	n251	n252	n253	n254	n255	n256	

COMPATIBLE ROUTERS


VARIANT: AX50S_T1 _____

PLOTS


VSWR for 5G/LTE antenna

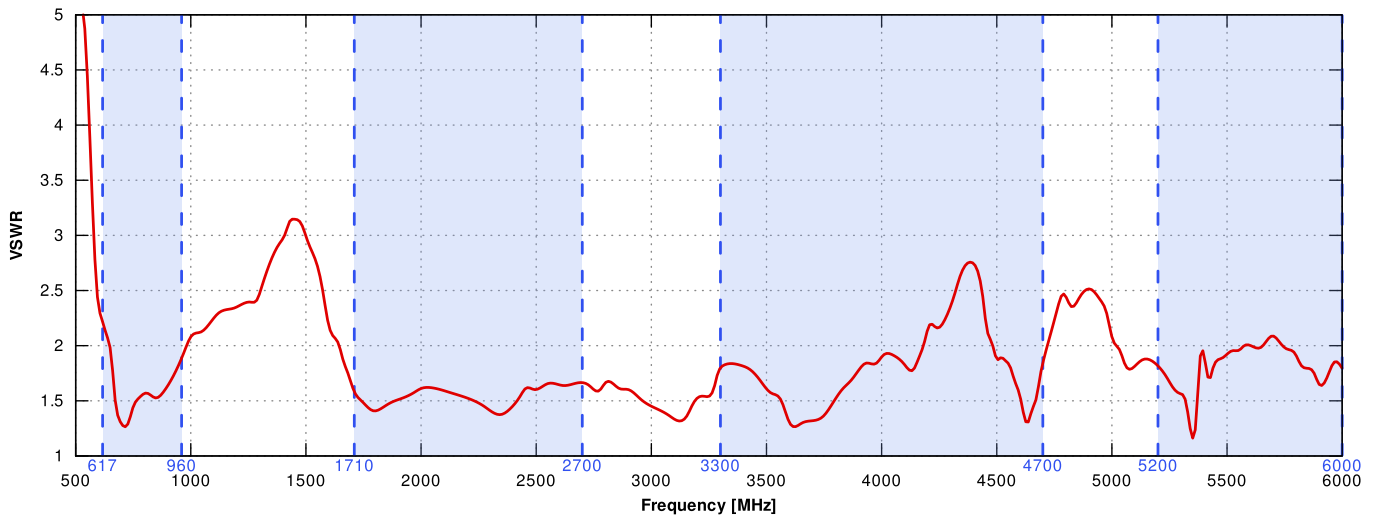


VSWR for Wi-Fi antenna

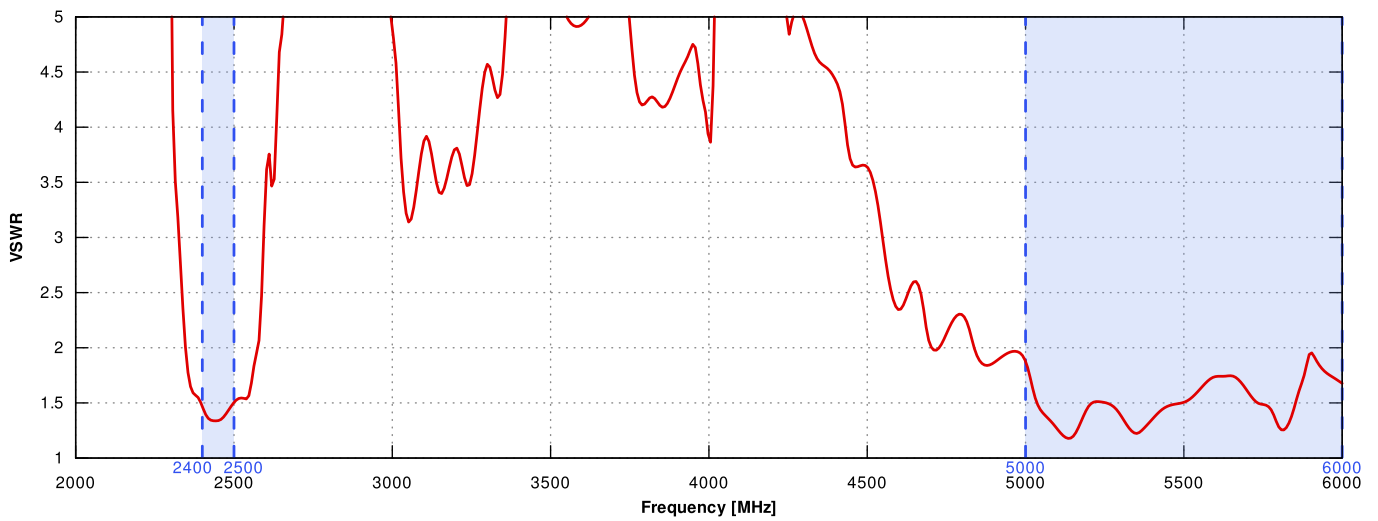


Gain for 5G/LTE antenna

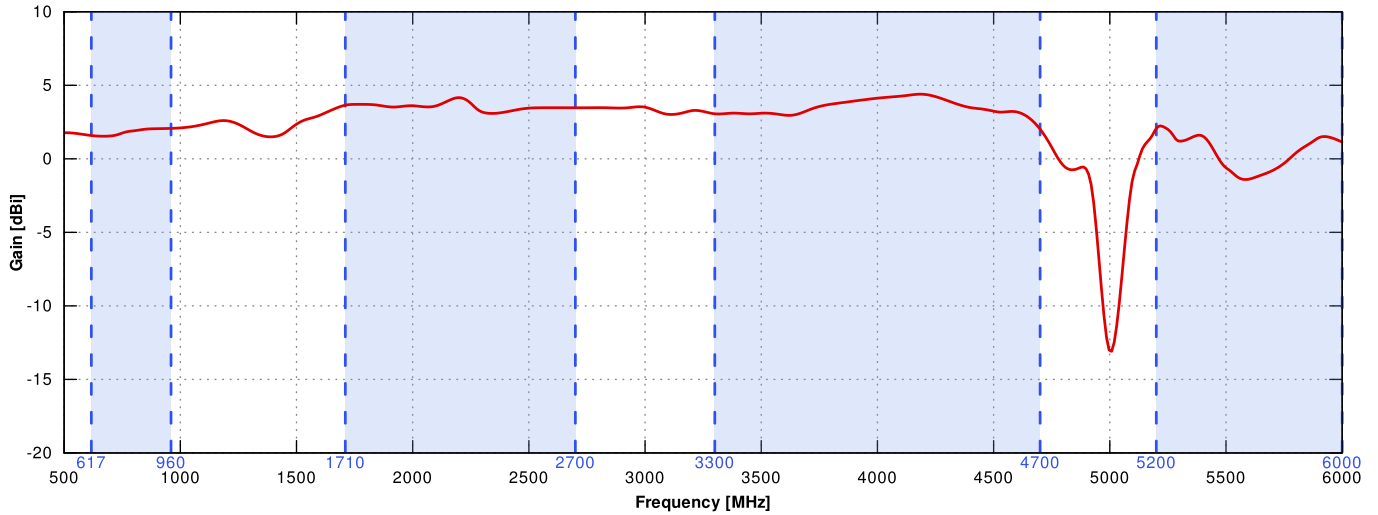


Gain for Wi-Fi antenna

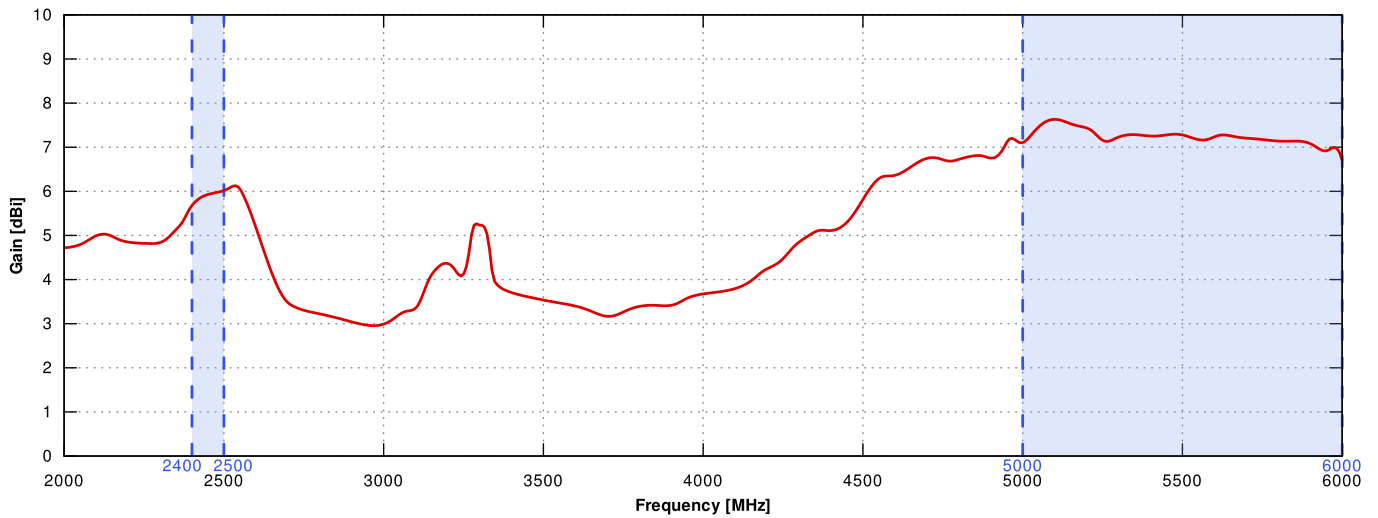


5G/LTE from 650MHz to 950MHz

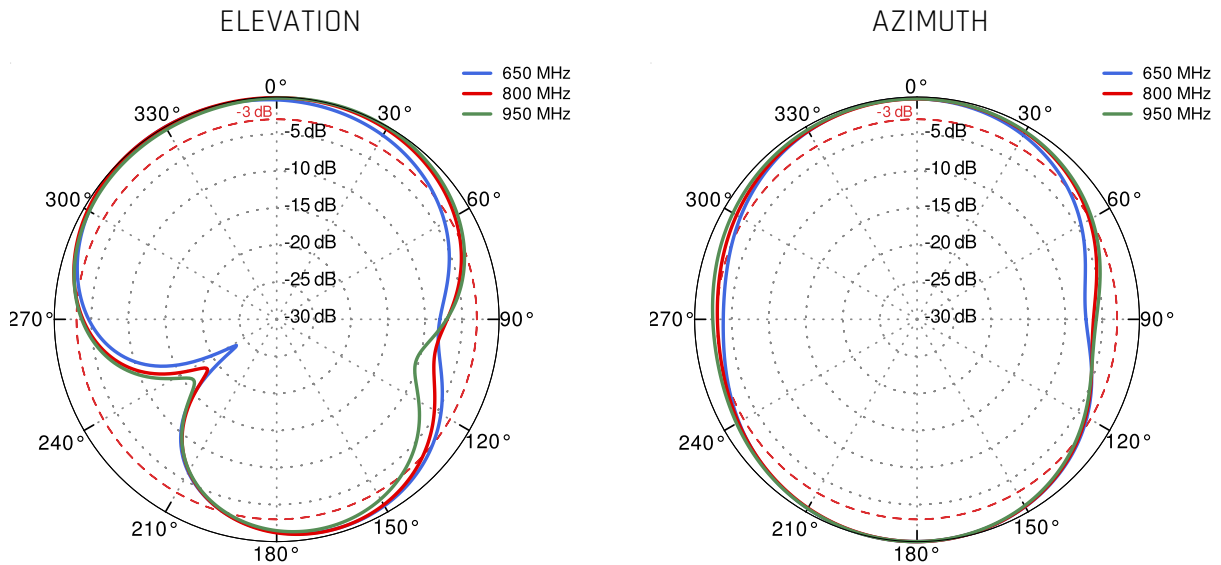


5G/LTE from 1.71GHz to 2.5GHz

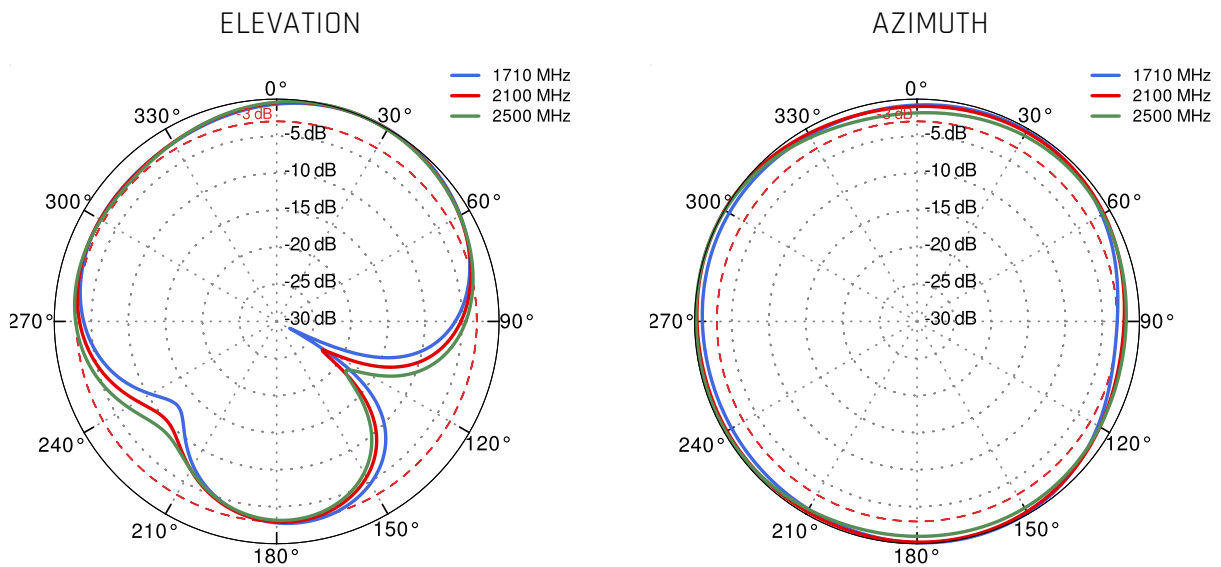


5G/LTE from 3.3GHz to 4.0GHz

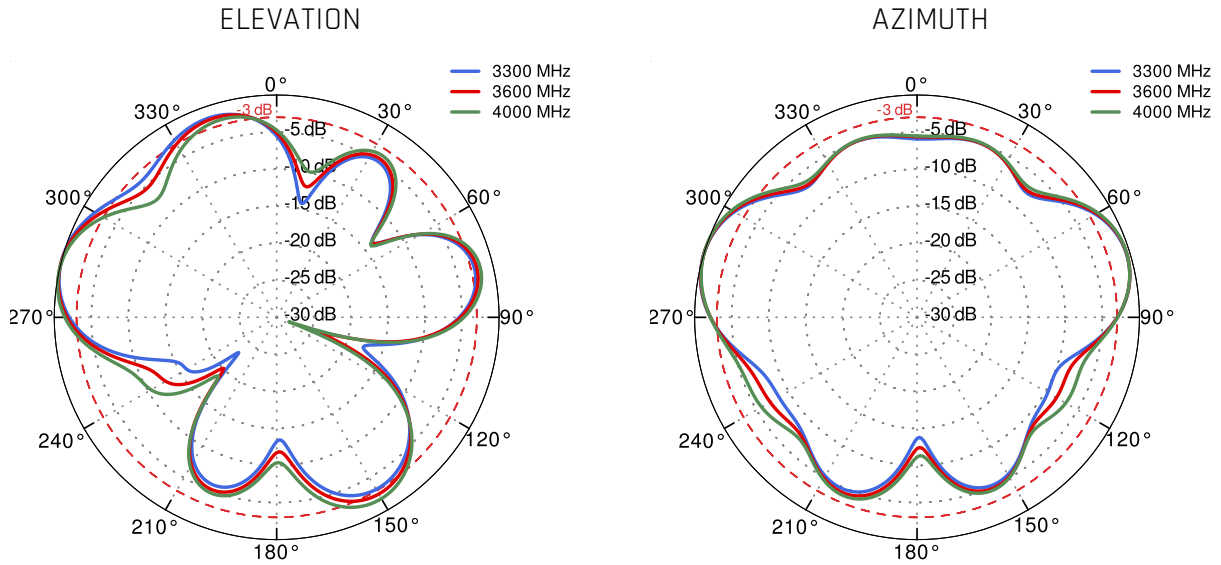

5G/LTE from 4.5GHz to 5.5GHz

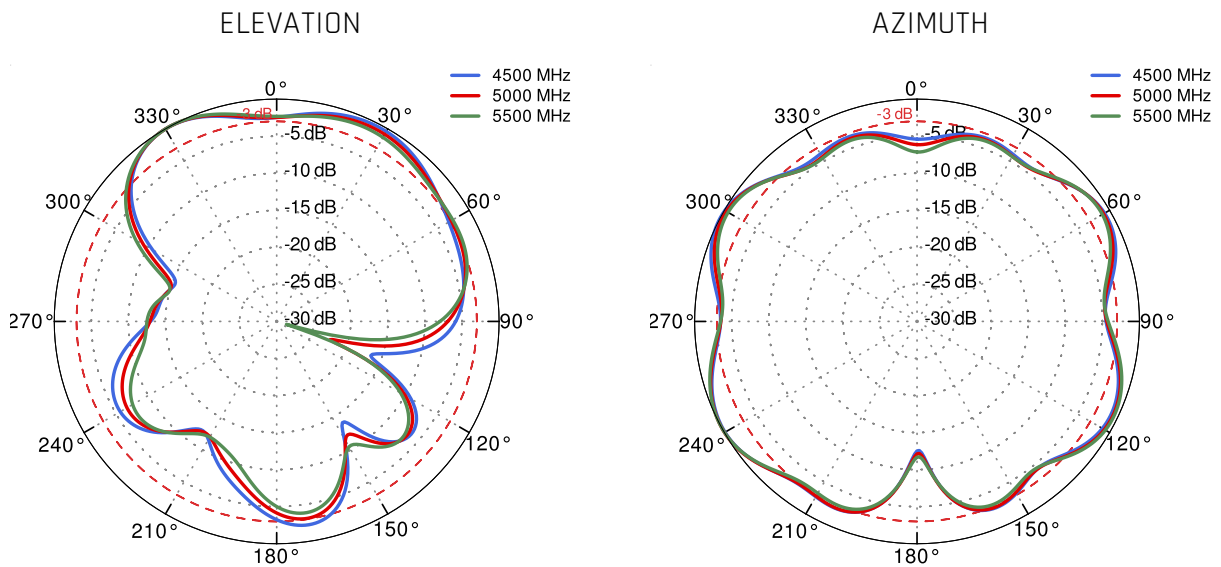

Wi-Fi 2.4 GHz and 5 GHz

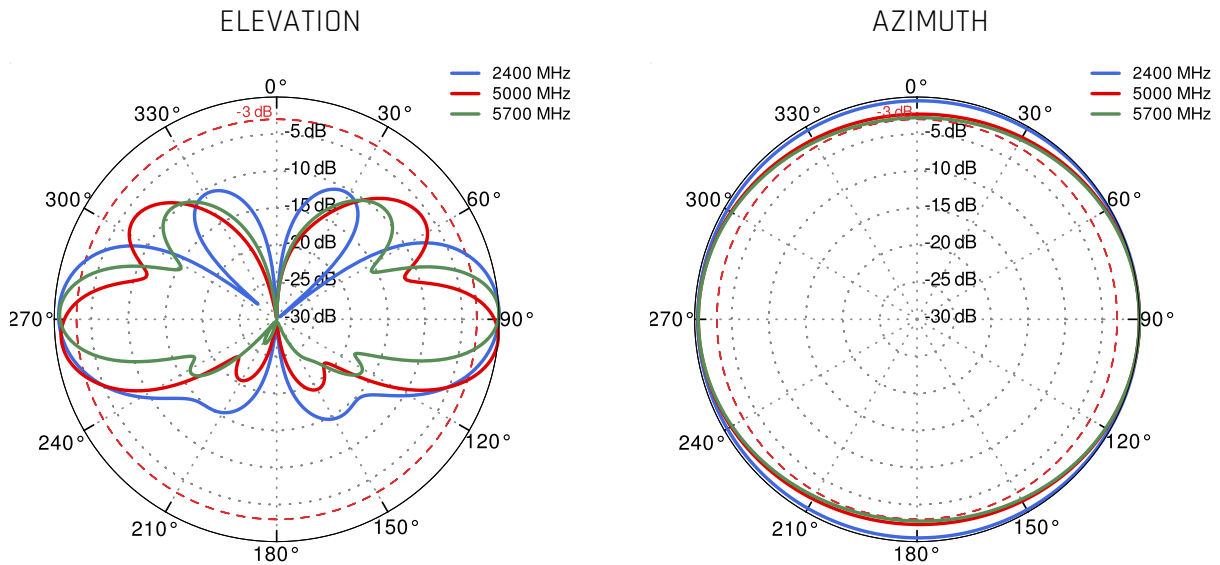

DIMENSIONS
