

QuDrone 1721 for Rajant DX5

QuDrone 1721 for Rajant DX5

QuDrone 1721 for Rajant DX5 is an antenna operating in the **1.7-2.17 GHz** frequency band, providing efficient signal transmission for wireless systems in LTE/5G networks. With a **4 dBi gain**, it helps extend coverage and improve connection quality. It also includes **Passive GPS antenna**.

The **360°/25° beamwidth** ensures wide horizontal coverage while limiting vertical signal dispersion. **V polarization** allows operation in modern radio systems using cross-polarized signals. The antenna is made of high-grade materials, making it compact and extremely durable.



OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, **IP67**




FREQUENCY BAND: **1700 - 2170 MHZ**



HIGH GAIN: **4 DBI**



MADE IN **EUROPE**

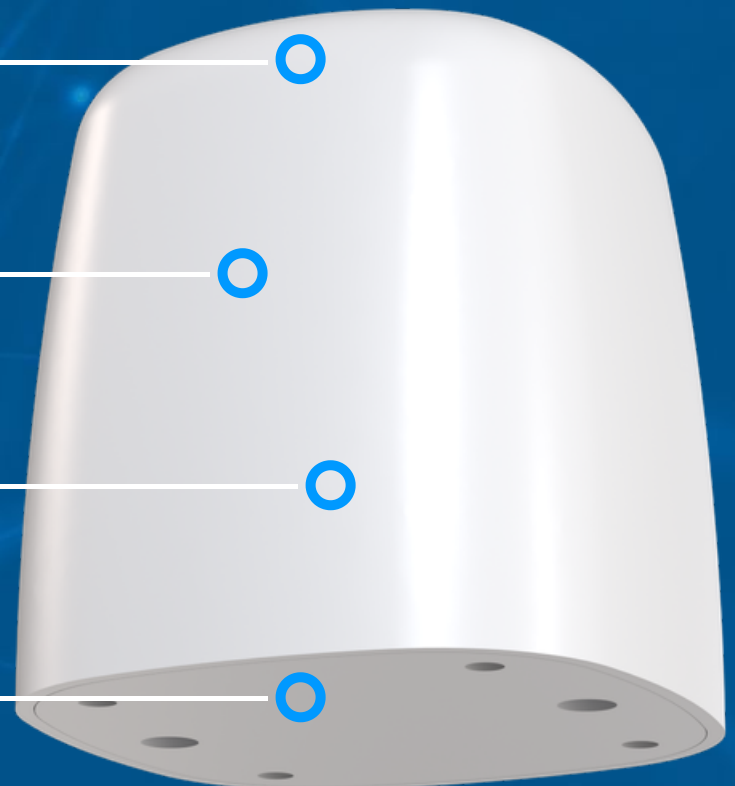

ANTENNA SPECIFICATION

FREQUENCY	1700 - 2170 MHz
GAIN	4 dBi
VSWR	< 1.80, max <2.00
BEAMWIDTH	360°/25°
POLARIZATION	V
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION


MATERIAL	ABS, aluminum, PTFE, Fiberglass
INGRESS PROTECTION	IP67
CONNECTOR TYPE	2x SMA
DIMENSIONS	72 x 72 x 77 mm
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F

COMPATIBLE ROUTERS

VARIANT: ARADX5D _____

PLOTS

VSWR

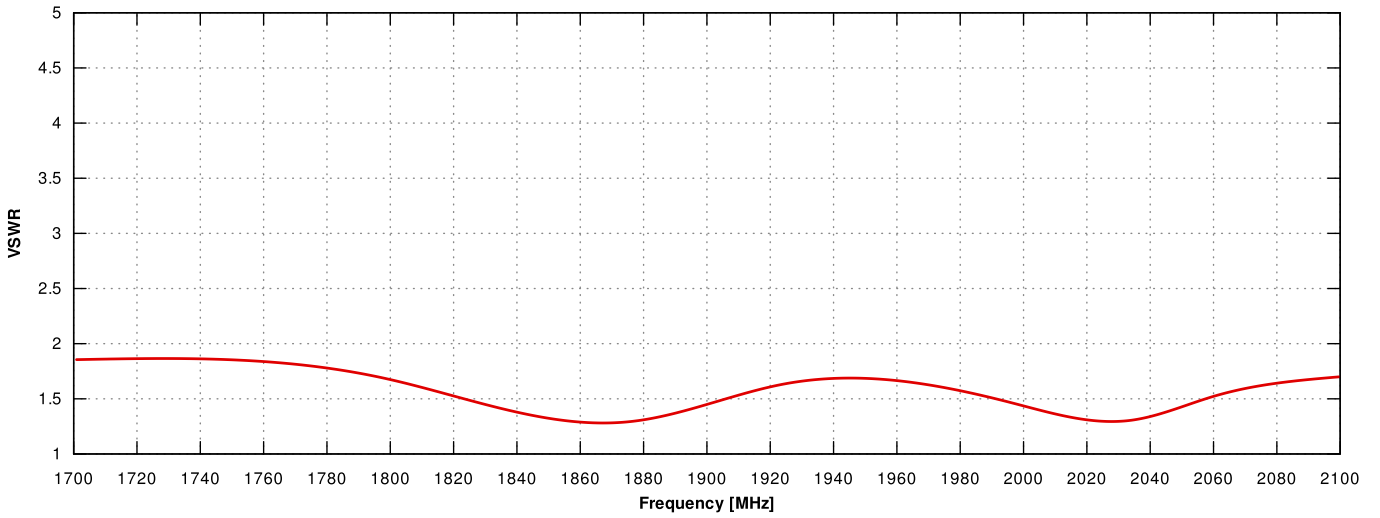

Gain

