

# QuOmni LTE MIMO 2x2 Nf

## Omnidirectional multiband LTE MIMO 2x2 antenna

QuOmni LTE omnidirectional MIMO 2x2 LTE outdoor antenna operates with vertical polarization and is designed for LTE/3G/2G connections. It supports various popular LTE bands (such as 3, 7, 20) across frequencies ranging from 694 MHz to 2700 MHz.

This versatile antenna can be mounted on either on pole or wall. It can be used as an outdoor client antenna, or it can be installed on mobile platforms like trains, buses, trucks, yachts, and boats to enable LTE/3G internet reception.

It is fully compatible with a range of Teltonika products, including the RUT240, RUT900, RUT950, RUT955, RUTX09, RUTX11, as well as other MIMO 2x2 LTE/3G/2G modems and routers.



 OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP68

 GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET

 TWO, INTEGRATED, NF CONNECTORS

 360° BEAMWIDTH

 4DBI GAIN

 MADE IN EUROPE



## LTE ANTENNA SPECIFICATION

<b>FREQUENCY</b>	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
<b>GAIN</b>	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
<b>SUPPORTED LTE/5G BANDS</b>	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
<b>VSWR</b>	<1.60, max <2.00
<b>BEAMWIDTH</b>	360°/35° ±5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## MECHANICAL SPECIFICATION

<b>MATERIALS</b>	ABS, aluminum, PTFE
<b>CONNECTOR TYPE</b>	Integrated Nf
<b>INGRESS PROTECTION</b>	IP68
<b>DIMENSIONS</b>	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
<b>WEIGHT</b>	1.5 kg 3.31 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 80°C From -40°F to 176°F
<b>MAST DIAMETER</b>	25-66 mm 0.98-2.60 inch

## FREQUENCY BANDS

<b>LTE / 4G GSM</b>	<table border="1"> <tr> <td>5</td><td>6</td><td>8</td><td>12</td><td>13</td><td>14</td><td>17</td> </tr> <tr> <td>18</td><td>19</td><td>20</td><td>26</td><td>27</td><td>28</td><td>29</td> </tr> <tr> <td>44</td><td>67</td><td>68</td><td>85</td><td>n81</td><td>n82</td><td>n83</td> </tr> <tr> <td>n89</td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table>	5	6	8	12	13	14	17	18	19	20	26	27	28	29	44	67	68	85	n81	n82	n83	n89							617 MHz	960 MHz
5	6	8	12	13	14	17																									
18	19	20	26	27	28	29																									
44	67	68	85	n81	n82	n83																									
n89																															
<b>LTE / 4G UMTS</b>	<table border="1"> <tr> <td>1</td><td>2</td><td>3</td><td>4</td><td>9</td><td>10</td><td>25</td> </tr> <tr> <td>33</td><td>34</td><td>35</td><td>36</td><td>37</td><td>39</td><td>59</td> </tr> <tr> <td>62</td><td>n80</td><td>n84</td><td>n86</td><td>n95</td><td></td><td></td> </tr> </table>	1	2	3	4	9	10	25	33	34	35	36	37	39	59	62	n80	n84	n86	n95			1710 MHz	2170 MHz							
1	2	3	4	9	10	25																									
33	34	35	36	37	39	59																									
62	n80	n84	n86	n95																											

**LTE / 4G WCS DARS**

 2300 MHz   2400 MHz

**LTE / 4G**

 2400 MHz       2700 MHz

## COMPATIBLE ROUTERS

VARIANT: AOLM2-N

**TELTONIKA**

RUT200, RUT206, RUT230, RUT240, RUT241, RUT260, RUT281, RUT900, RUT901, RUT950, RUT951, RUT951 PoE+, RUT955, RUT956, RUT981, RUT986, RUTC40, RUTM09, RUTM11, RUTM16, RUTM56, RUTX09, RUTX11, TRB160

**ROBUSTEL**

EG5100, LG5100, R1500, R1510, R1511P, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R2110, R2120, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010

**RAJANT**

Peregrine LTE BreadCrumb FE1-2455LW

**ACKSYS**

AirBox LTE, AirWan

**ADVANTECH**

ICR-2031

**AIRGAIN**

NL-SW-LTE-GELS3, NL-SW-LTE-QBG95, NL-SW-LTE-QBG96, NL-SW-LTE-SRC7611-4, NL-SW-LTE-TC1NAG, NL-SW-LTE-TC1WWG, NL-SW-LTE-TC4NAG, NL-SW-LTE-TC4WWG, NL-SW-LTE-TG1WWG, NL-SWNB-LTE-NRF9160-D

**AM TELECOM**

AMM545, AMM5500, AMM574, AMM585

**ANYBUS**

Wireless Router WLAN

**CISCO**


C819 LTE, MG21E, Z4C

<b>COMSET</b>	CM210A-W, CM210Q-W, CM510Q-W, CM685T-W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G, CM820Q-4, CM820Q-6, CM820T-W, CM820V-4, CM820V-W
<b>D-LINK</b>	DWR-960, G415 AX1500, G416 AX1500, N300 4G
<b>DIGI</b>	6310-DX, 6330-MX, EX12, EX15, IX10, IX15, IX20, IX30, WR31, WR44 RR
<b>ERICSSON (CRADLEPOINT)</b>	CBA550, E100, E102, IBR200, IBR600C, IBR900, L950, R500, R920, S400, S700
<b>FIBOCOM</b>	FM101-CG, FM101-EAU, FM101-NA, L610-EU-MiniPCIe, L610-LA-MiniPCIe, L716-CN MiniPCIe, L716-EU-MiniPCIe, NL668-AM MiniPCIe, NL668-EAU-M.2, NL668-EU MiniPCIe, NL668-JP MiniPCIe, NL668-LA MiniPCIe
<b>FORTINET</b>	FEX-101F, FEX-201F, FEX-211E, FEX-212F, FortiGate Rugged 60F-3G4G, FortiGate Rugged 70F-3G4G
<b>FOUR-FAITH</b>	4G Cellular Router F-R100, 4G Industrial Computer F4931-R2H, 4G Industrial Computer F4932-R2H-DF1, Android Industrial Computer F4932-R1Q, Cellular Wireless Router F-R200, Dual Sim 4G Router F3X46, Dual-sim WiFi Router F3946, Industrial WiFi Router F3X36Q, LAN Port Router F3X26 V2, LTE Industrial Router F3X27 V2, LTE Wireless Router F3x36
<b>INHAND</b>	IR302
<b>MIKROTIK</b>	RB912, RB922, RBM11G, RBM33G
<b>MILESIGHT</b>	UR32
<b>OPTION</b>	CloudGate LTE WW CAT4
<b>PEPLINK</b>	Balance 20X, MAX BR1 Classic, MAX BR1 ENT, MAX BR1 IP55, MAX BR1 M2M, MAX BR1 Mini, MAX BR1 Mini (HW3), MAX BR1 Mini Core (HW3), MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Slim
<b>PROROUTE</b>	H685 4G Router, H685 LTE 4G CAT6 Router, H820 M2M 4G Router


<b>QUECTEL</b>	LTE-A EM060K-EA, LTE-A EM060K-GL, LTE-A EM061K-GL, LTE-A EM120K-GL, LTE-A EM120R-GL
<b>RAJANT</b>	Peregrine LTE BreadCrumb FE1-2455LW
<b>ROBUSTEL</b>	EG5100, LG5100, R1500, R1510, R1511P, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R2110, R2120, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010
<b>SEMTECH (SIERRA WIRELESS)</b>	AirLink LX40, AirLink LX60, AirLink MP70, AirLink RV50X, AirLink RV55, AirLink RX55, EM7411, EM7421, EM7431, EM7511, EM7565, EM7590, EM7595, EM7690, MC7411, MC7421, MC7431, WP7607, WP7610
<b>SIEMENS</b>	6GK5876-4AA00-2BA2, 6GK5876-4AA00-2DA2, 6GK5876-4AA10-2BA2
<b>SIMCOM</b>	A7602E-H-M2, A7602E-H-PCIEA, A7608SA-H MiniPCIe, A7906E-M2, A7908, SIM7600X-H MiniPCIe, SIM7600X-H-M2, SIM7600X-MiniPCIe, SIM7906A-M2, SIM7906E-M2, SIM7906G-M2, SIM7912A-M2, SIM7912E-M2
<b>TELIT CINTERION</b>	LE910Cx Linux mPCIe Series, LE910Cx ThreadX mPCIe Series, LM940, LN920, mPLS53, mPLS83
<b>TELTONIKA</b>	RUT200, RUT206, RUT230, RUT240, RUT241, RUT260, RUT281, RUT900, RUT901, RUT950, RUT951, RUT951 PoE+, RUT955, RUT956, RUT981, RUT986, RUTC40, RUTM09, RUTM11, RUTM16, RUTM56, RUTX09, RUTX11, TRB160
<b>WAVETEL</b>	W2400 LTE , W3600 4G/LTE Dual WAN, W3604 Multi-WAN, W3608 Multi-WAN, W421, W4600, W4600-S2
<b>WLINK</b>	ER120, G200, G510, G520, ODU310, R210, R220, R520
<b>ZYXEL</b>	LTE3202-M437, LTE3301-PLUS, LTE5388-M804, LTE5398-M904
<b>OTHER</b>	2 * SMA, 3 * SMA

# PLOTS



## VSWR

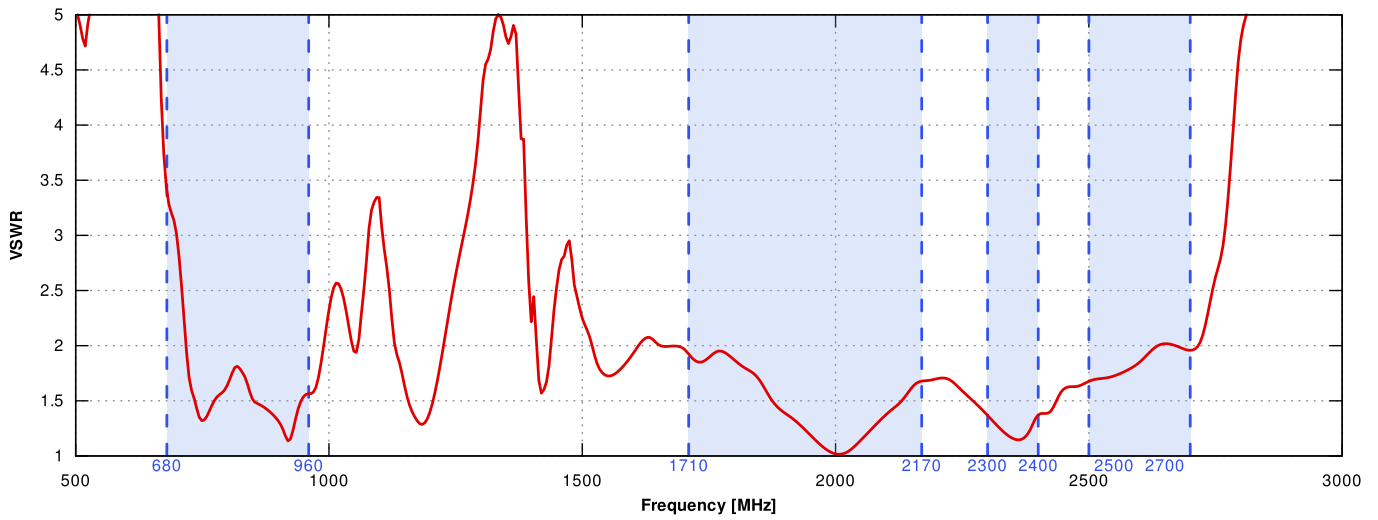



## Gain

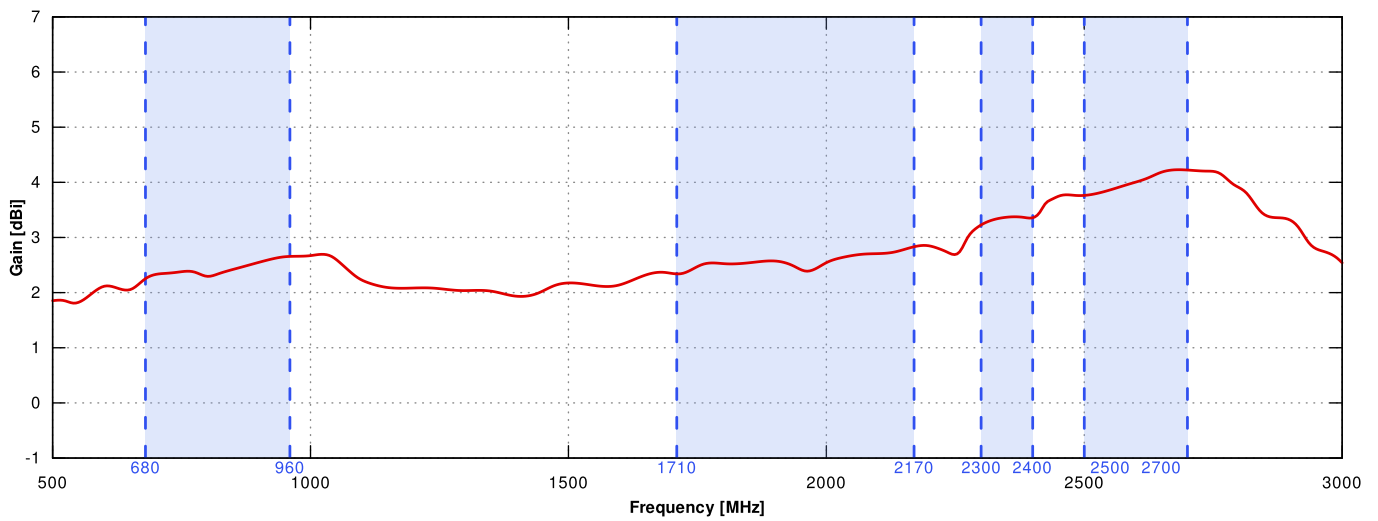


### From 700MHz to 900MHz

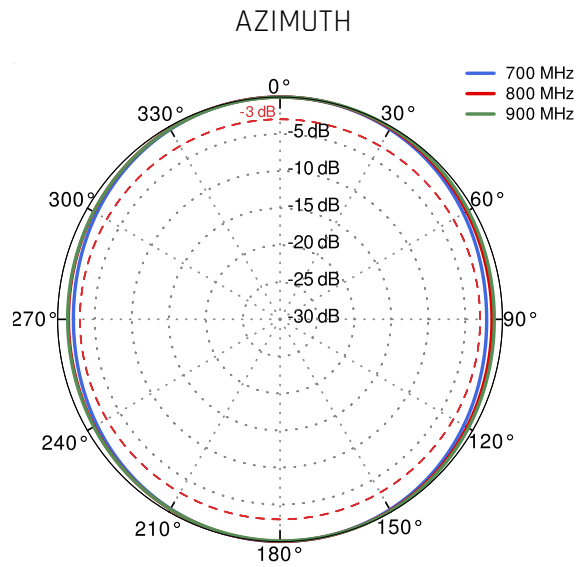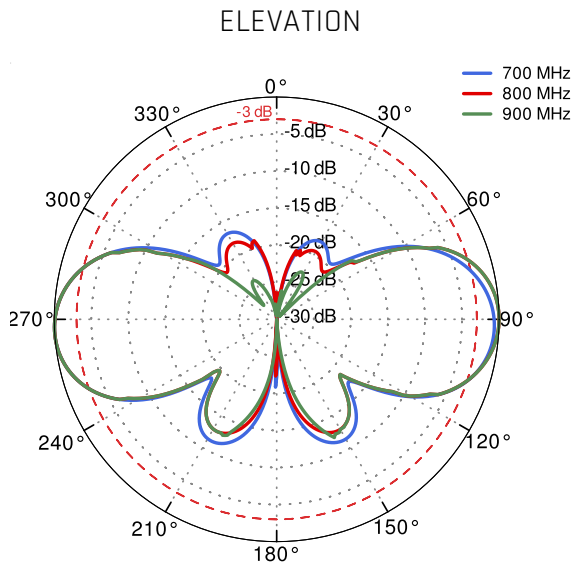

### From 1.71GHz to 2.17GHz

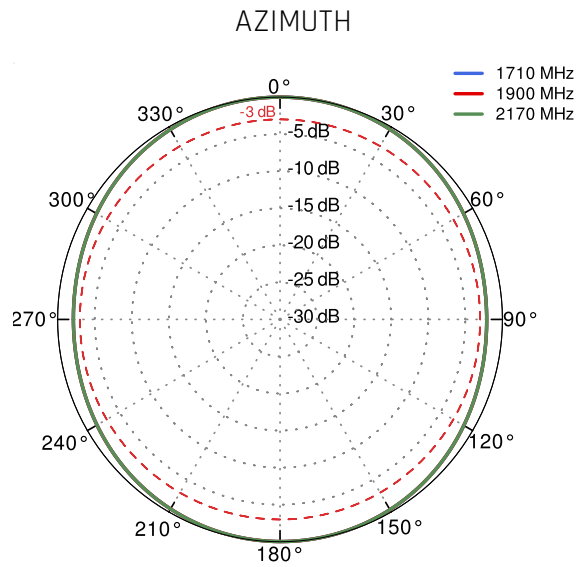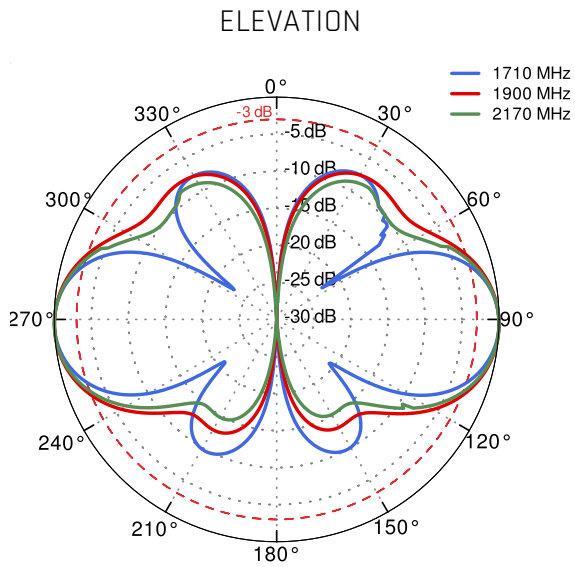

From 2.3GHz to 2.7GHz

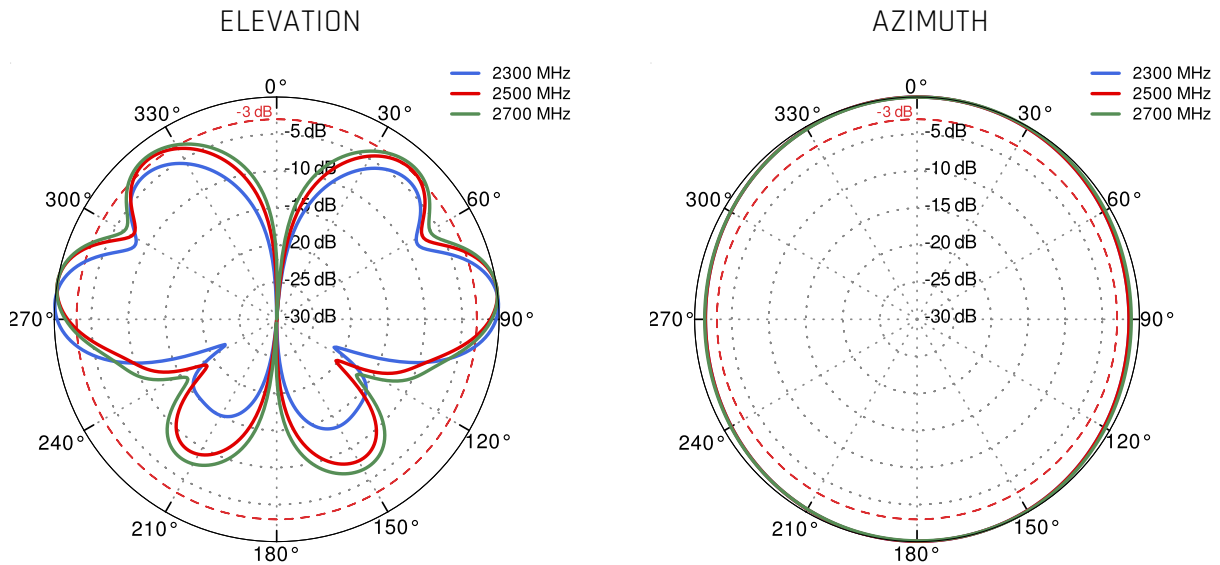

## DIMENSIONS

