

QuOmni LTE MIMO 2x2 Nf

Omnidirectional multiband LTE MIMO 2x2 antenna

QuOmni LTE omnidirectional MIMO 2x2 LTE outdoor antenna operates with vertical polarization and is designed for LTE/3G/2G connections. It supports various popular LTE bands (such as 3, 7, 20) across frequencies ranging from 694 MHz to 2700 MHz.

This versatile antenna can be mounted on either on pole or wall. It can be used as an outdoor client antenna, or it can be installed on mobile platforms like trains, buses, trucks, yachts, and boats to enable LTE/3G internet reception.

It is fully compatible with a range of Teltonika products, including the RUT240, RUT900, RUT950, RUT955, RUTX09, RUTX11, as well as other MIMO 2x2 LTE/3G/2G modems and routers.



OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP68



GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET



TWO, INTEGRATED, NF CONNECTORS



360° BEAMWIDTH



4DBI GAIN



MADE IN EUROPE



LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
VSWR	<1.60, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	Integrated Nf
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
MAST DIAMETER	25-66 mm 0.98-2.60 inch

FREQUENCY BANDS

LTE / 4G GSM	5	6	8	12	13	14	17	617 MHz	960 MHz
	18	19	20	26	27	28	29		
	44	67	68	85	n81	n82	n83		
	n89								
LTE / 4G UMTS	1	2	3	4	9	10	25	1710 MHz	2170 MHz
	33	34	35	36	37	39	59		
	62	n80	n84	n86	n95				

LTE / 4G WCS DARS

 2300
MHz

30

40

 2400
MHz

LTE / 4G

 2400
MHz

7

38

41

53

69

n90

 2700
MHz

COMPATIBLE ROUTERS

VARIANT: AOLM2-N

TELTONIKA

RUT200, RUT202, RUT206, RUT230, RUT240, RUT241, RUT260, RUT261, RUT281, RUT286, RUT900, RUT901, RUT950, RUT951, RUT951 PoE+, RUT955, RUT956, RUT981, RUT986, RUTC40, RUTM09, RUTM11, RUTM16, RUTM56, RUTX09, RUTX11, TRB160

ROBUSTEL

EG5100, LG5100, R1500, R1510, R1511P, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R2110, R2120, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010

RAJANT

Peregrine LTE BreadCrumb FE1-2455LW

ACKSYS

AirBox LTE, AirWan

ADVANTECH

ICR-2031

AIRGAIN

NL-SW-LTE-GELS3, NL-SW-LTE-QBG95, NL-SW-LTE-QBG96, NL-SW-LTE-SRC7611-4, NL-SW-LTE-TC1NAG, NL-SW-LTE-TC1WWG, NL-SW-LTE-TC4NAG, NL-SW-LTE-TC4WWG, NL-SW-LTE-TG1WWG, NL-SWNB-LTE-NRF9160-D

AM TELECOM

AMM545, AMM5500, AMM574, AMM585

ANYBUS

Wireless Router WLAN

CISCO


C819 LTE, MG21E, Z4C

COMSET	CM210A-W, CM210Q-W, CM510Q-W, CM685T-W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G, CM820Q-4, CM820Q-6, CM820T-W, CM820V-4, CM820V-W
D-LINK	DWR-960, G415 AX1500, G416 AX1500, N300 4G
DIGI	6310-DX, 6330-MX, EX12, EX15, IX10, IX15, IX20, IX30, WR31, WR44 RR
ERICSSON (CRADLEPOINT)	CBA550, E100, E102, IBR200, IBR600C, IBR900, L950, R500, R920, S400, S700
FIBOCOM	FM101-CG, FM101-EAU, FM101-NA, L610-EU-MiniPCIe, L610-LA-MiniPCIe, L716-CN MiniPCIe, L716-EU-MiniPCIe, NL668-AM MiniPCIe, NL668-EAU-M.2, NL668-EU MiniPCIe, NL668-JP MiniPCIe, NL668-LA MiniPCIe
FORTINET	FEX-101F, FEX-201F, FEX-211E, FEX-212F, FortiGate Rugged 60F-3G4G, FortiGate Rugged 70F-3G4G
FOUR-FAITH	4G Cellular Router F-R100, 4G Industrial Computer F4931-R2H, 4G Industrial Computer F4932-R2H-DF1, Android Industrial Computer F4932-R1Q, Cellular Wireless Router F-R200, Dual Sim 4G Router F3X46, Dual-sim WiFi Router F3946, Industrial WiFi Router F3X36Q, LAN Port Router F3X26 V2, LTE Industrial Router F3X27 V2, LTE Wireless Router F3x36
INHAND	IR302
MIKROTIK	RB912, RB922, RBM11G, RBM33G
MILESIGHT	UR32
OPTION	CloudGate LTE WW CAT4
PEPLINK	Balance 20X, MAX BR1 Classic, MAX BR1 ENT, MAX BR1 IP55, MAX BR1 M2M, MAX BR1 Mini, MAX BR1 Mini (HW3), MAX BR1 Mini Core (HW3), MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Slim
PROROUTE	H685 4G Router, H685 LTE 4G CAT6 Router, H820 M2M 4G Router


QUECTEL	LTE-A EM060K-EA, LTE-A EM060K-GL, LTE-A EM061K-GL, LTE-A EM120K-GL, LTE-A EM120R-GL
RAJANT	Peregrine LTE BreadCrumb FE1-2455LW
ROBUSTEL	EG5100, LG5100, R1500, R1510, R1511P, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R2110, R2120, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010
SEMTECH (SIERRA WIRELESS)	AirLink LX40, AirLink LX60, AirLink MP70, AirLink RV50X, AirLink RV55, AirLink RX55, EM7411, EM7421, EM7431, EM7511, EM7565, EM7590, EM7595, EM7690, MC7411, MC7421, MC7431, WP7607, WP7610
SIEMENS	6GK5876-4AA00-2BA2, 6GK5876-4AA00-2DA2, 6GK5876-4AA10-2BA2
SIMCOM	A7602E-H-M2, A7602E-H-PCIEA, A7608SA-H MiniPCIe, A7906E-M2, A7908, SIM7600X-H MiniPCIe, SIM7600X-H-M2, SIM7600X-MiniPCIe, SIM7906A-M2, SIM7906E-M2, SIM7906G-M2, SIM7912A-M2, SIM7912E-M2
TELIT CINTERION	LE910Cx Linux mPCIe Series, LE910Cx ThreadX mPCIe Series, LM940, LN920, mPLS53, mPLS83
TELTONIKA	RUT200, RUT202, RUT206, RUT230, RUT240, RUT241, RUT260, RUT261, RUT281, RUT286, RUT900, RUT901, RUT950, RUT951, RUT951 PoE+, RUT955, RUT956, RUT981, RUT986, RUTC40, RUTM09, RUTM11, RUTM16, RUTM56, RUTX09, RUTX11, TRB160
WAVETEL	W2400 LTE , W3600 4G/LTE Dual WAN, W3604 Multi-WAN, W3608 Multi-WAN, W421, W4600, W4600-S2
WLINK	ER120, G200, G510, G520, ODU310, R210, R220, R520
ZYXEL	LTE3202-M437, LTE3301-PLUS, LTE5388-M804, LTE5398-M904
OTHER	2 * SMA, 3 * SMA

PLOTS



VSWR

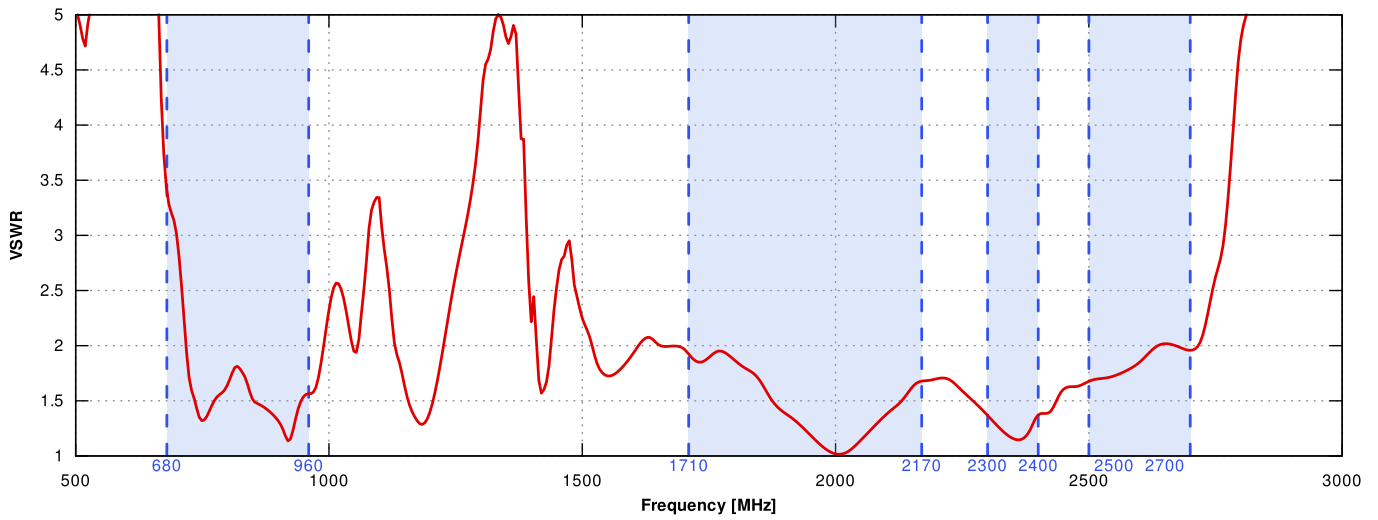



Gain

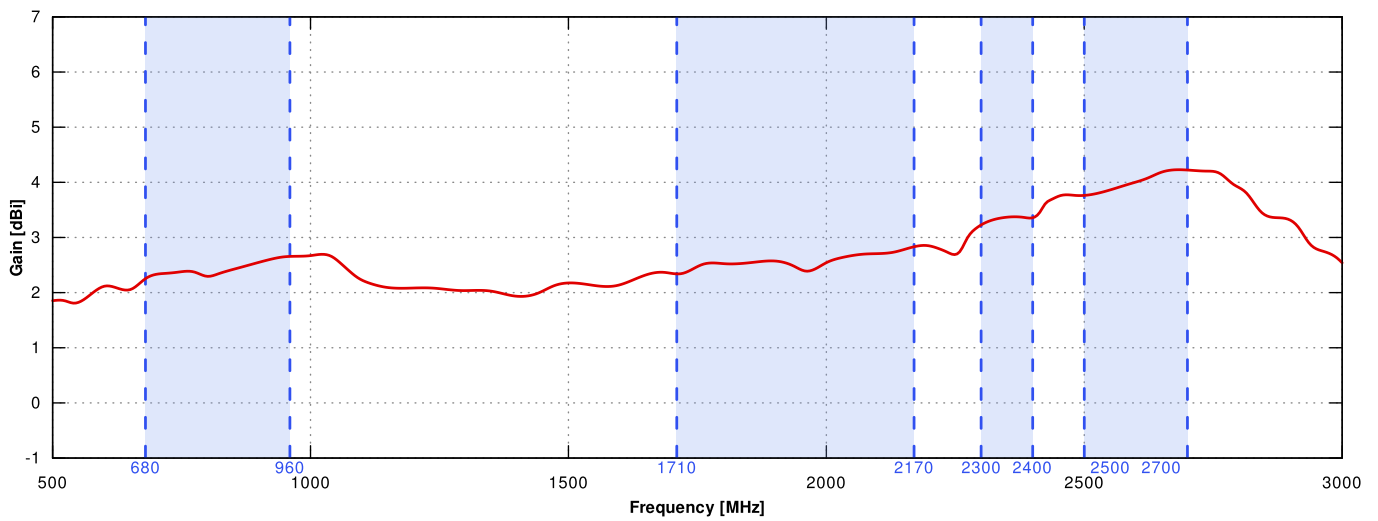


From 700MHz to 900MHz

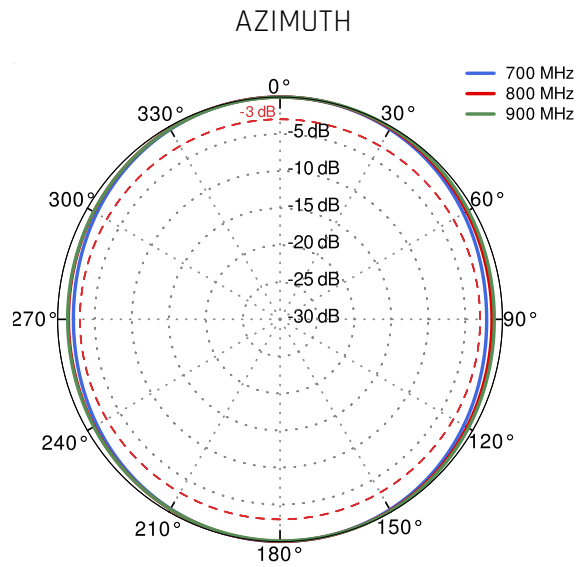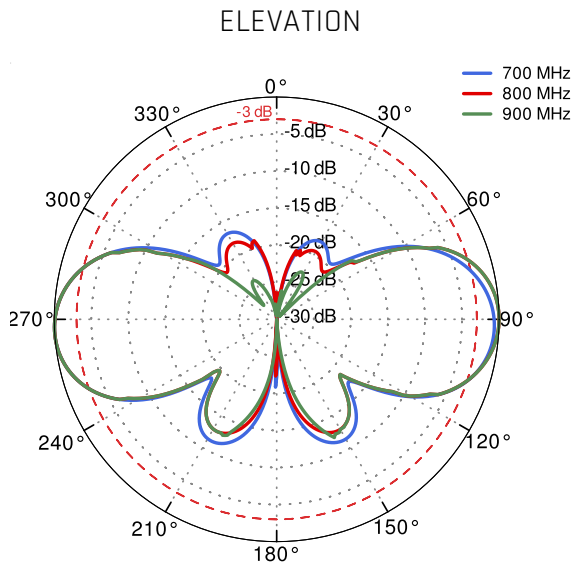

From 1.71GHz to 2.17GHz

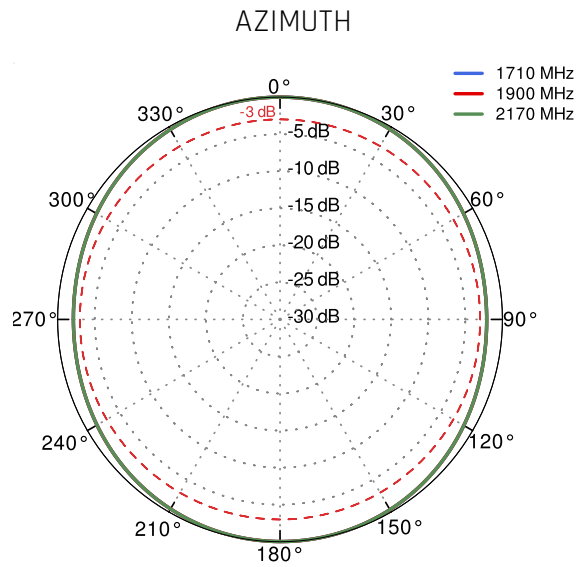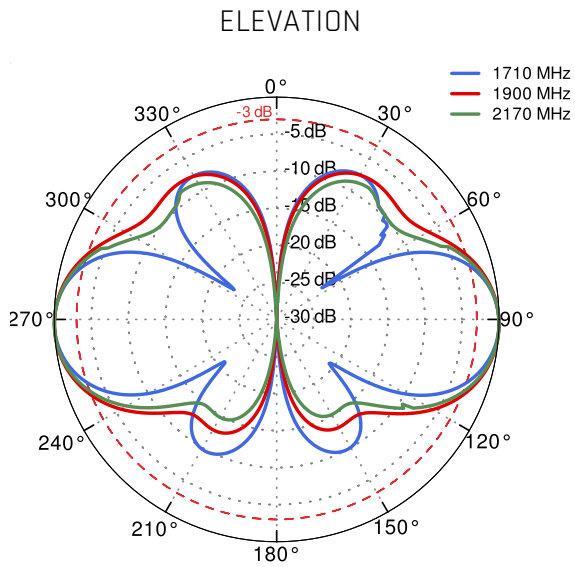

From 2.3GHz to 2.7GHz

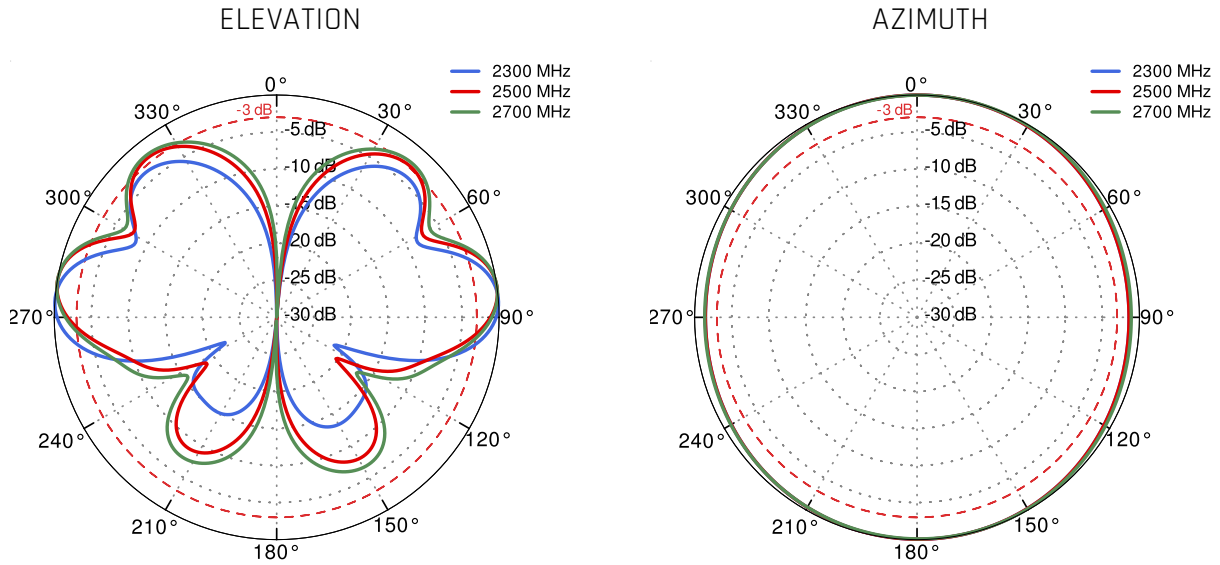

DIMENSIONS

