

QuPanel 5G/LTE Global MIMO 2x2

Directional ultra wideband 5G/LTE MIMO 2x2 antenna

QuPanel **5G**/LTE directional MIMO 2x2 is ultra wideband 5G outdoor antenna. It's primary designed for LTE/5G/3G/2G devices which require high efficiency connections. The antenna covers many LTE bands including the new Extended LTE **Band 71** and frequencies: **600 - 6000MHz**. The mounting bracket allows the antenna to be installed on the pole or on the wall, as the client antenna to receive Internet by LTE/5G/3G/2G. It's ideal solution to use with all industrial and domestic 2x2 5G modems and routers like: Teltonika, Digi, Mikrotik, Robustel, Cisco, etc.

5G**BAND 71****2x2 MIMO****617-6000MHz****7 dBi****DIRECTIONAL****IP 67****-40° TO +80°****WIDE BAND 600-6000MHZ, 5G TECHNOLOGY****GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET****TWO SMA CONNECTORS****80° BEAMWIDTH****7DBI GAIN****MADE IN EUROPE**

5G / LTE ANTENNA SPECIFICATION

| | |
|---------------------|--|
| FREQUENCY | 617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.6 GHz 4.7 - 6.0 GHz |
| GAIN | 617 - 960 MHz : 6 dBi 1.7 - 2.7 GHz : 7 dBi 3.3 - 4.6 GHz : 7 dBi 4.7 - 6.0 GHz : 5.5dBi |
| SUPPORTED LTE BANDS | 1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106 |
| SUPPORTED 5G BANDS | n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n65, n66, n67, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256 |
| VSWR | <2.00, max <3.00 |
| BEAMWIDTH | 80°/80° ±15° |
| POLARIZATION | X (±45degrees) |
| IMPEDANCE | 50 Ω |

MECHANICAL SPECIFICATION

| | |
|-----------------------|---|
| MATERIALS | ABS, aluminum, PTFE, fiberglass |
| CONNECTOR TYPE | SMA |
| INGRESS PROTECTION | IP67 |
| DIMENSIONS | 486.0 x 292.2 x 105.6 mm 19.13 x 11.50 x 4.16 inch |
| WEIGHT | 2.8 kg 6.17 lbs |
| OPERATING TEMPERATURE | From -40°C to 80°C From -40°F to 176°F |
| MAST DIAMETER | 25-60mm 0.98-2.36 inch |

FREQUENCY BANDS

| | | | | | | | | |
|----------|-----|----|----|----|----|----|-----|----------|
| LTE / 4G | 1 | 2 | 3 | 4 | 5 | 7 | 8 | 6000 MHz |
| | 9 | 10 | 12 | 13 | 14 | 17 | 18 | |
| | 19 | 20 | 22 | 25 | 26 | 27 | 28 | |
| | 29 | 30 | 33 | 34 | 35 | 36 | 37 | |
| | 38 | 39 | 40 | 41 | 42 | 43 | 44 | |
| | 45 | 47 | 48 | 49 | 52 | 53 | 65 | |
| | 66 | 67 | 68 | 69 | 71 | 85 | 103 | |
| | 106 | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| 617 MHz | | | | | | | | |

5G

617
MHz

6000
MHz

| | | | | | | |
|-----|-----|------|------|------|-----|-----|
| n1 | n2 | n3 | n5 | n7 | n8 | n12 |
| n13 | n14 | n18 | n20 | n25 | n26 | n28 |
| n29 | n30 | n34 | n38 | n39 | n40 | n41 |
| n46 | n47 | n48 | n53 | n65 | n66 | n67 |
| n71 | n77 | n78 | n79 | n80 | n81 | n82 |
| n83 | n84 | n85 | n86 | n89 | n90 | n95 |
| n97 | n98 | n100 | n101 | n256 | | |

COMPATIBLE ROUTERS

VARIANTS: AP5G2-G, AP5G2-G1

TELTONIKA

RUT200, RUT230, RUT240, RUT241, RUT260, RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTX09, RUTX11

DIGI

6310-DX, 6330-MX, EX12, EX15, IX10, IX15, IX20, IX30, WR31

ROBUSTEL

EG5100, LG5100, R1500, R1510, R1511P, R151x, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R2110, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010

ACKSYS

AirBox LTE, AirWan

ANYBUS

Wireless Router WLAN

COMSET

CM210A-W, CM210Q-W, CM510Q-W, CM685T-W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G, CM820Q-4, CM820Q-6, CM820T-W, CM820V-4, CM820V-W

CRADLEPOINT

CBA550, E100, E102, IBR200, IBR600C, IBR900, L950, R500, R920, S700

| | |
|------------------------|--|
| D-LINK | DWR-960, G415 AX1500, G416 AX1500, N300 4G |
| DIGI | 6310-DX, 6330-MX, EX12, EX15, IX10, IX15, IX20, IX30, WR31 |
| FORTINET | FEX-101F, FEX-201F, FEX-211E, FEX-212F, FortiGate Rugged 60F-3G4G, FortiGate Rugged 70F-3G4G |
| FOUR-FAITH | 4G Cellular Router F-R100, 4G Industrial Computer F4931-R2H, 4G Industrial Computer F4932-R2H-DF1, Android Industrial Computer F4932-R1Q, Cellular Wireless Router F-R200, Dual Sim 4G Router F3X46, Dual-sim WiFi Router F3946, Edge Computing Gateway F-G100, Industrial WiFi Router F3X36Q, LAN Port Router F3X26 V2, LTE Industrial Router F3X27 V2, LTE Wireless Router F3x36 |
| MIKROTIK | RB912, RB922, RBM11G, RBM33G |
| MILESIGHT | UR32 |
| OPTION | CloudGate LTE WW CAT4 |
| PEPLINK | Balance 20X, Balance 310 5G, MAX BR1 Classic, MAX BR1 ENT, MAX BR1 IP55, MAX BR1 M2M, MAX BR1 Mini, MAX BR1 Mini (HW3), MAX BR1 Mini Core (HW3), MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Slim |
| PROROUTE | H685 4G Router, H685 LTE 4G CAT6 Router, H820 M2M 4G Router |
| ROBUSTEL | EG5100, LG5100, R1500, R1510, R1511P, R151x, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R2110, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010 |
| SIEMENS | 6GK5876-4AA00-2BA2, 6GK5876-4AA00-2DA2, 6GK5876-4AA10-2BA2 |
| SIERRA WIRELESS | AirLink LX40, AirLink LX60, AirLink MP70, AirLink RV50X, AirLink RV55, AirLink RX55 |
| TELTONIKA | RUT200, RUT230, RUT240, RUT241, RUT260, RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTX09, RUTX11 |

WAVETEL

W2400 LTE , W3600 4G/LTE Dual WAN, W3604 Multi-WAN, W3608 Multi-WAN, W421, W4600, W4600-S2

WLINK


ER120, G200, G510, G520, R210, R220, R520

ZYXEL


LTE3202-M437, LTE3301-PLUS, LTE5388-M804, LTE5398-M904, NR5101

OTHER



2 * SMA, 3 * SMA

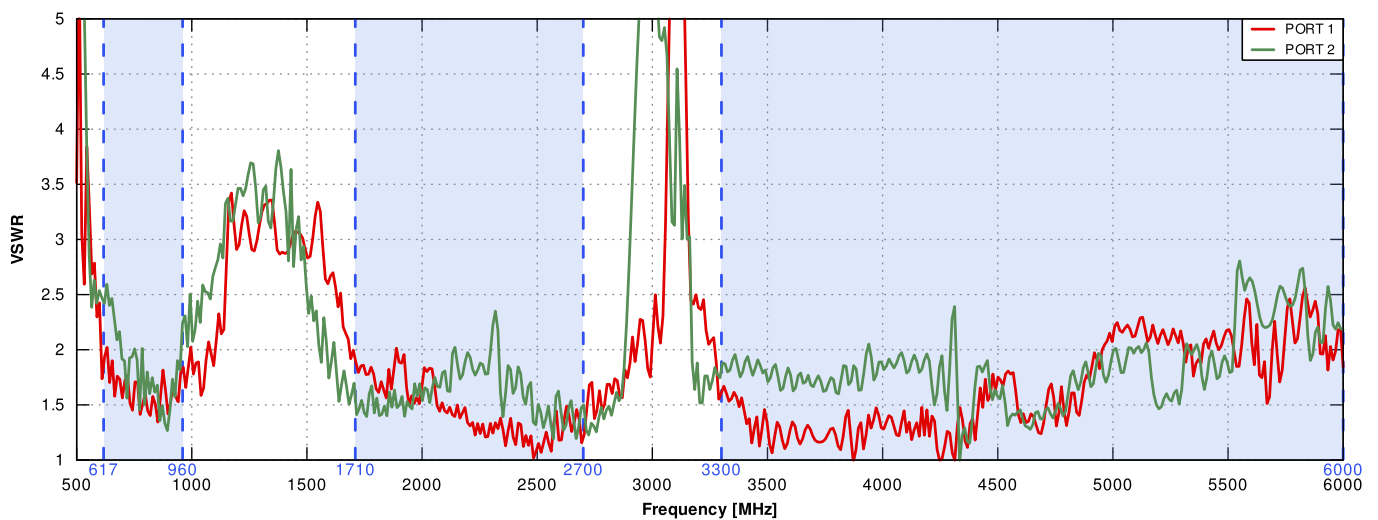 **PLOTS**
VSWR


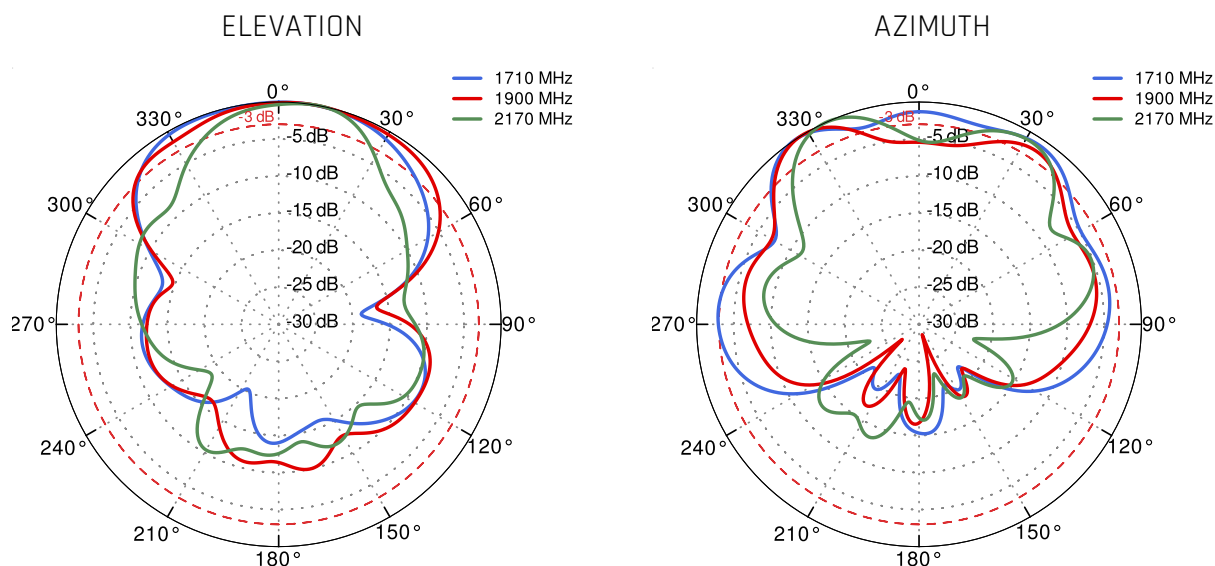
Gain

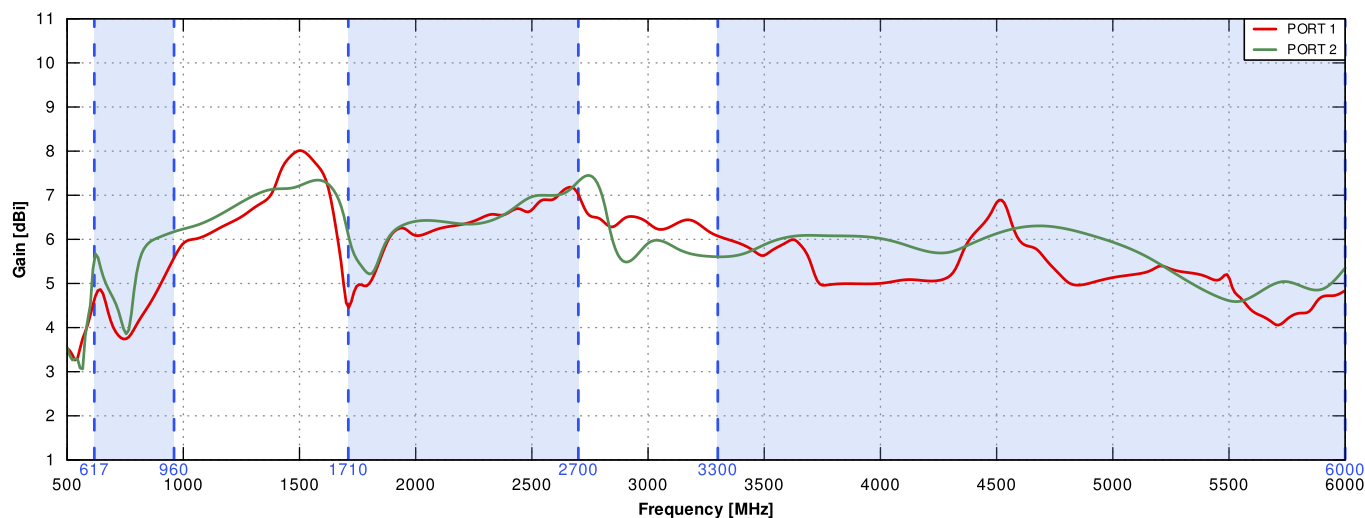


PORT 1 - 5G/LTE from 650MHz to 950MHz

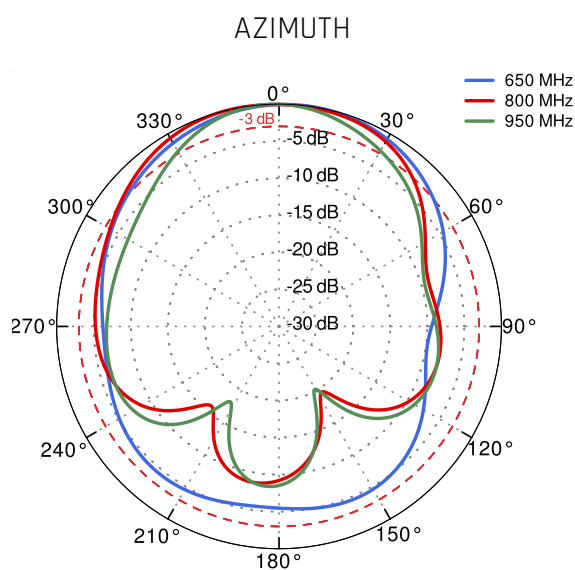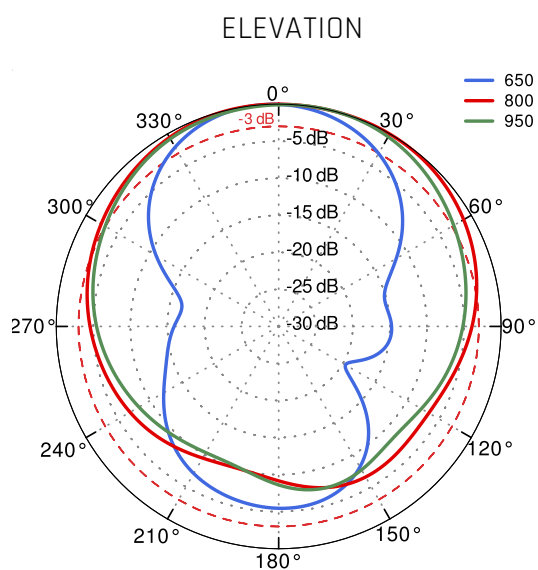


PORT 1 - 5G/LTE from 1.71GHz to 2.17GHz




PORT 1 - 5G/LTE from 2.3GHz to 2.7GHz

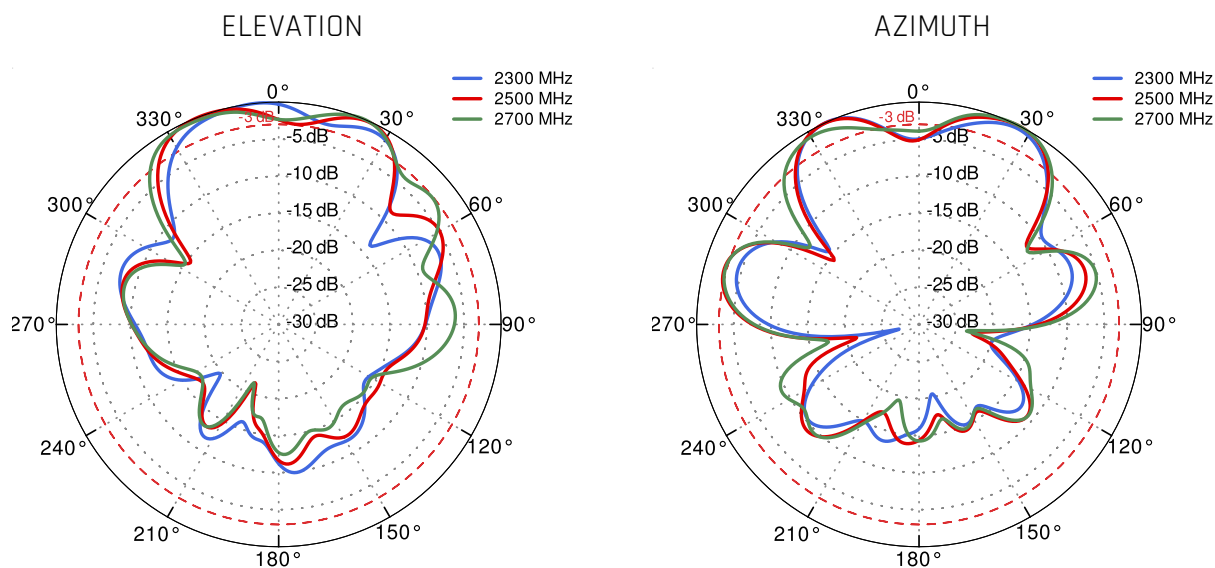


PORT 1 - 5G/LTE from 3.3GHz to 3.8GHz

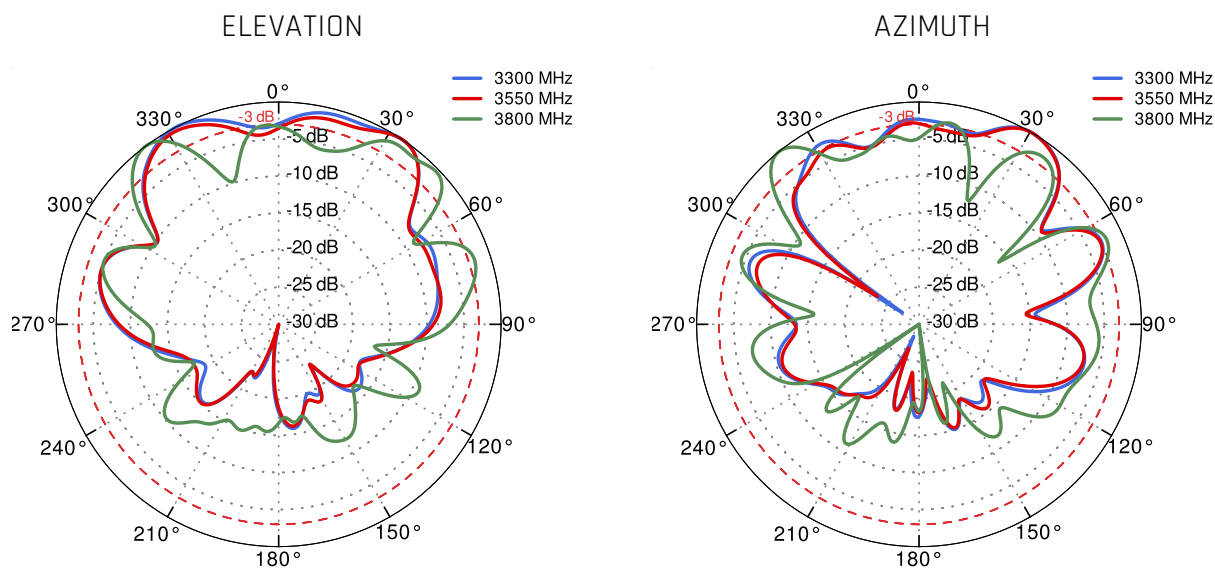


PORT 1 - 5G/LTE from 4.2GHz to 4.6GHz

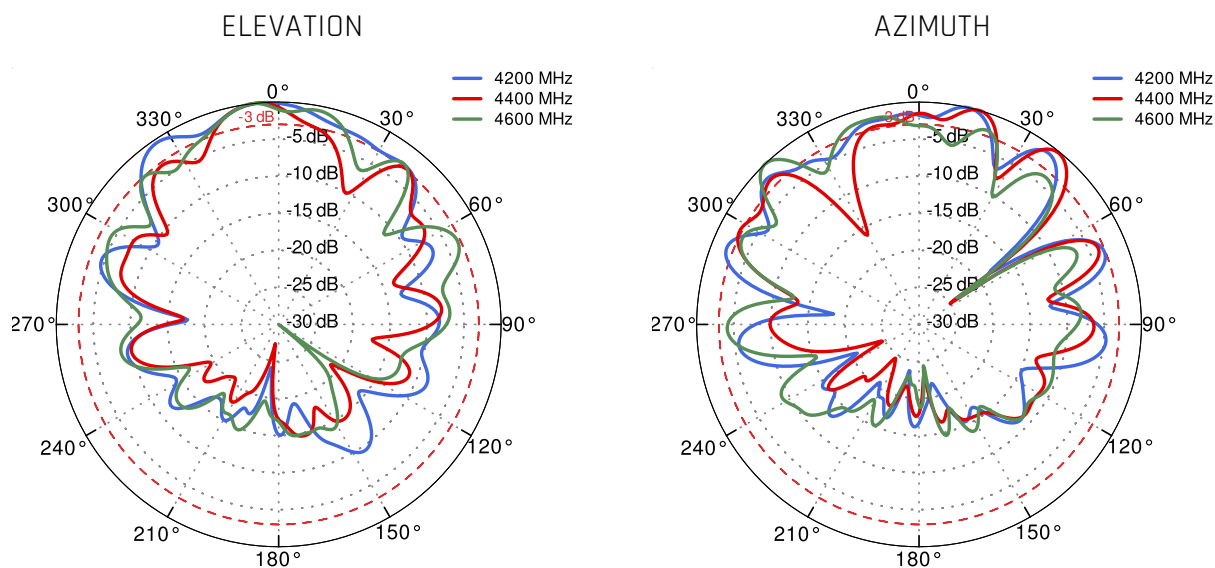


PORT 1 - 5G/LTE from 5.0GHz to 5.9GHz

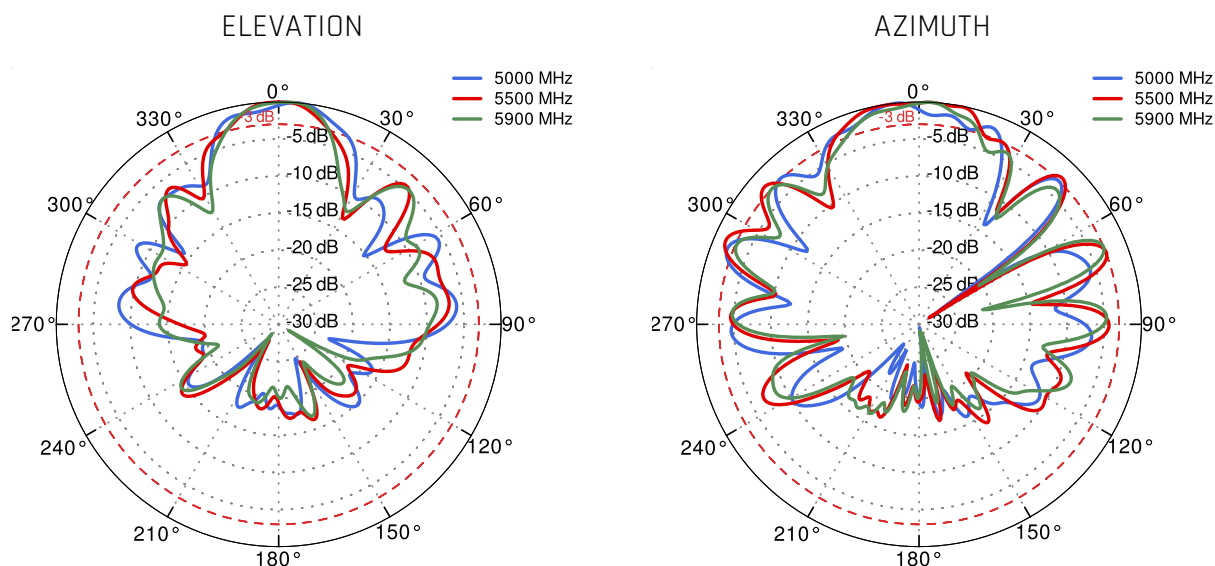


PORT 2 - 5G/LTE from 650MHz to 950MHz

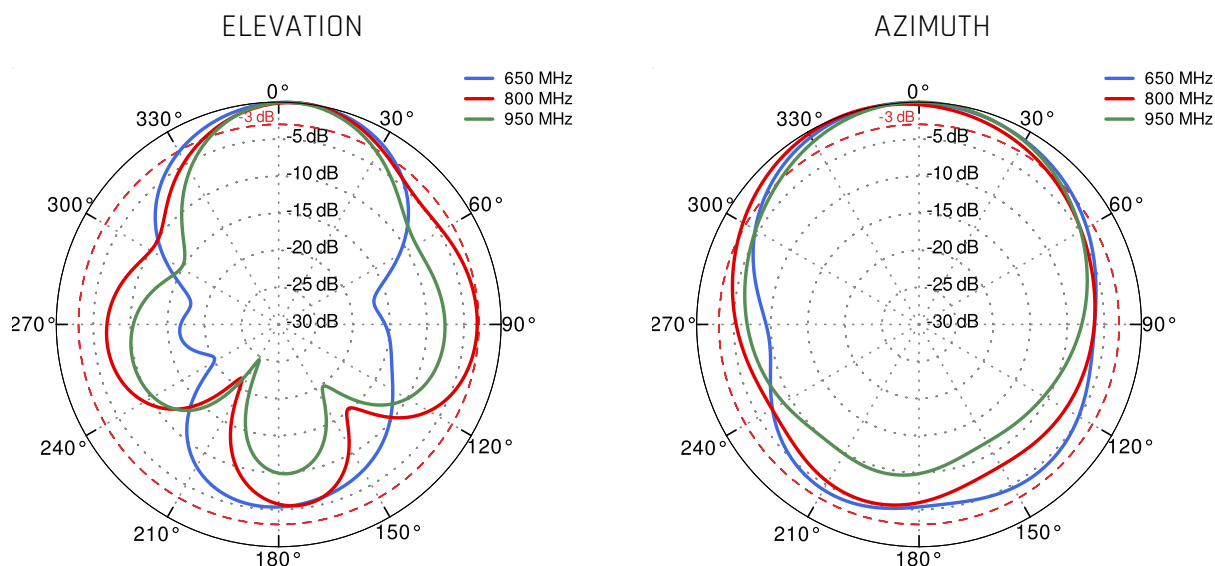


PORT 2 - 5G/LTE from 1.71GHz to 2.17GHz

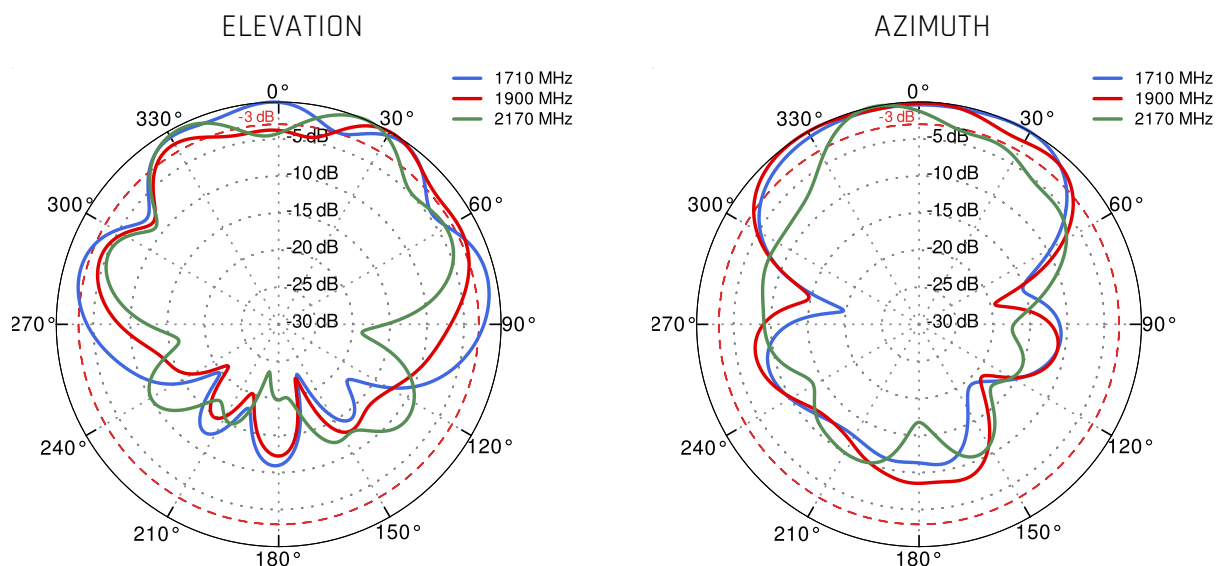


PORT 2 - 5G/LTE from 2.3GHz to 2.7GHz

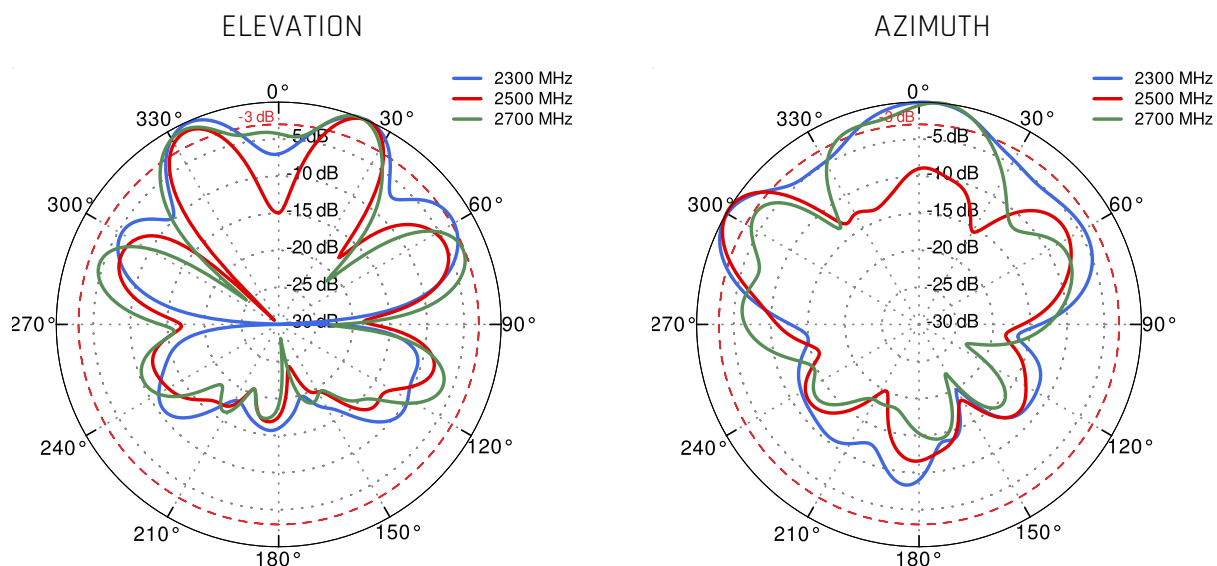


PORT 2 - 5G/LTE from 3.3GHz to 3.8GHz

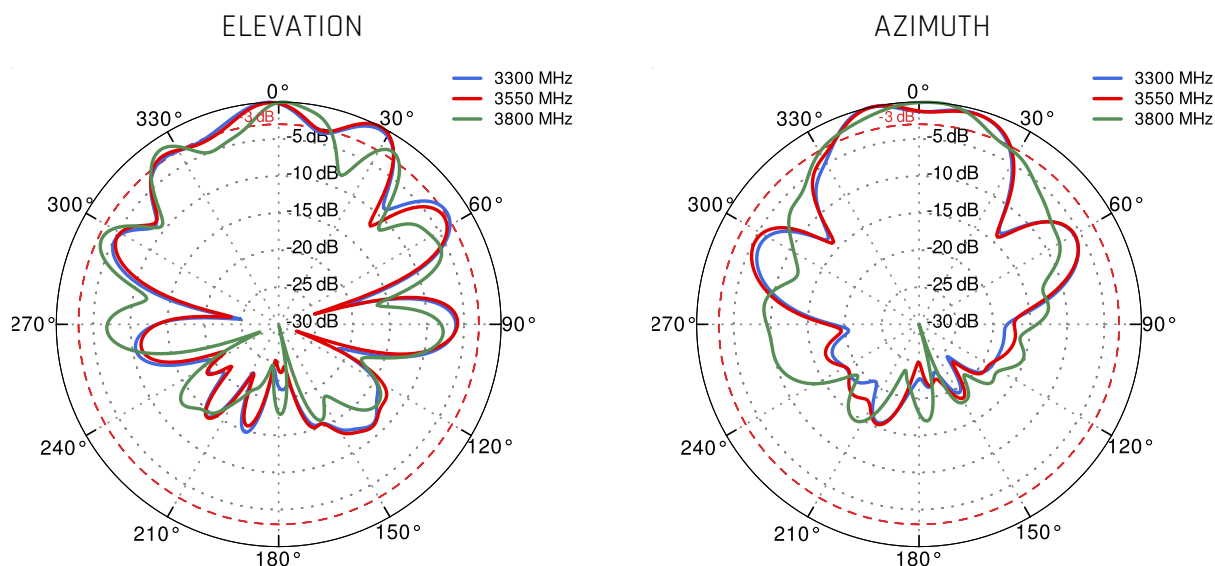

PORT 2 - 5G/LTE from 4.2GHz to 4.6GHz

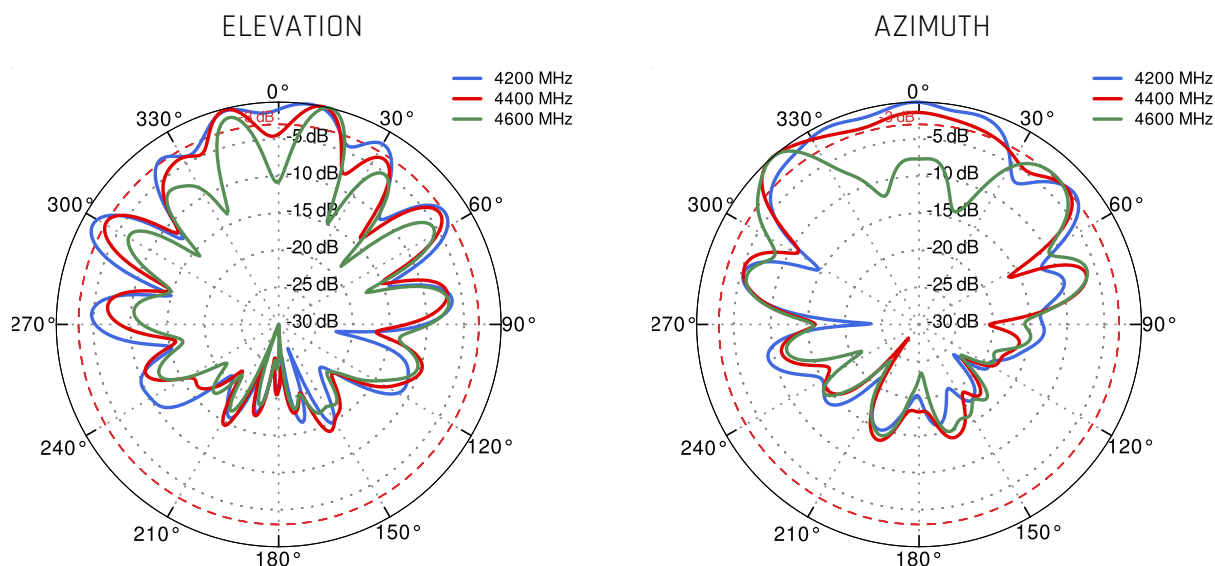

PORT 2 - 5G/LTE from 5.0GHz to 5.9GHz

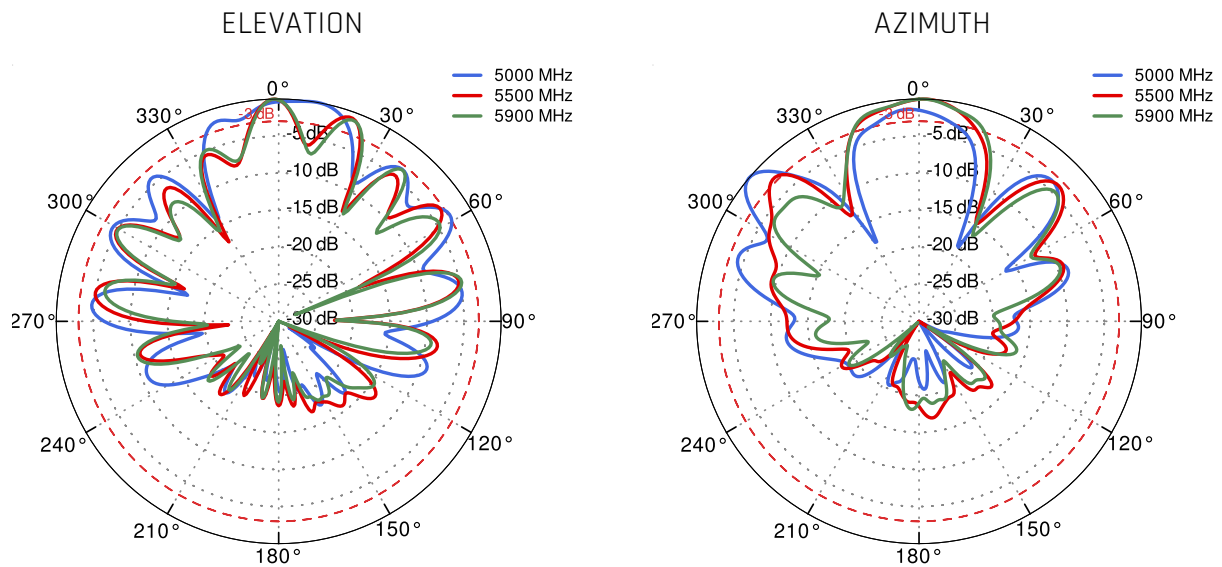

DIMENSIONS

