


QuCube for Robustel R1520LG

INTEGRATED MULTI-BAND LTE & 5G OMNI ANTENNA + WI-FI ANTENNA + LORA ANTENNA + PLACE TO INSTALL ROBUSTEL R1520LG (ALL-IN-ONE)

QuCube for Robustel R1520LG is a revolutionary outdoor antenna solution that combines minimized dimensions with exceptional antenna performance. Designed specifically as an **antenna for Robustel R1520LG router**, it delivers reliable, high-speed wireless connectivity in even the most demanding environments. This all-in-one unit integrates high-gain omnidirectional **5G, Wi-Fi and LoRa antennas** with Robustel router into a compact, rugged **IP68-rated waterproof enclosure**. The integration reduces installation complexity while enabling rapid deployment of advanced outdoor 5G solutions.

Engineered for outdoor and mobile applications, **QuCube** is ideal for use in transportation systems, for underground connectivity or urban and public installations. It ensures consistent performance wherever dependable connectivity is essential.



OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP68



ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



ROUTER COMPARTMENT **INSIDE**



MADE IN **EUROPE**



5G/LTE SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 3.8 GHz 4.2 - 6.0 GHz
GAIN	617 - 960 MHz : 2 dBi 1.7 - 2.7 GHz : 3 dBi 3.3 - 3.8 GHz : 3 dBi 4.2 - 6.0 GHz : 4 dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n65, n66, n67, n71, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n255
VSWR	<1.20, max <2.50
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

LORA ANTENNA SPECIFICATION

FREQUENCY	868 MHz 915 MHz
GAIN	1.5 dBi
VSWR	<1.20, max <2.50
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 2dBi 5 - 7.2 GHz: 5dBi
VSWR	< 2.50
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	QuRJ45
OUTER DIMENSIONS	160 x 160 x 155 mm 6.3 x 6.3 x 6.10 inch
WEIGHT	1.5 kg
OPERATING TEMPERATURE	-40°C to 80°C -40°F to 176°F
INGRESS PROTECTION	IP67 and IP68

MOUNTING KIT


MATERIAL	Galvanized steel
WEIGHT	0.4kg
MOUNTING PLACE	Wall or mast
MAST DIAMETER	25-66 mm 0.98-2.60 inch

COMPATIBLE ROUTERS


VARIANT: - _____

PLOTS


5G/LTE VSWR

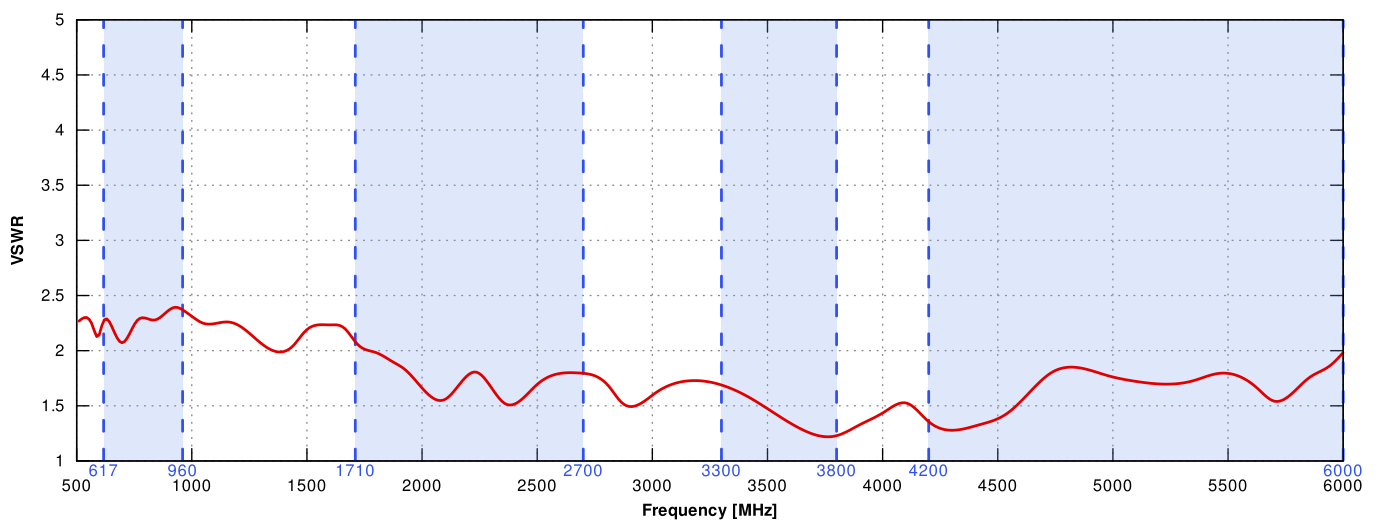


5G/LTE GAIN

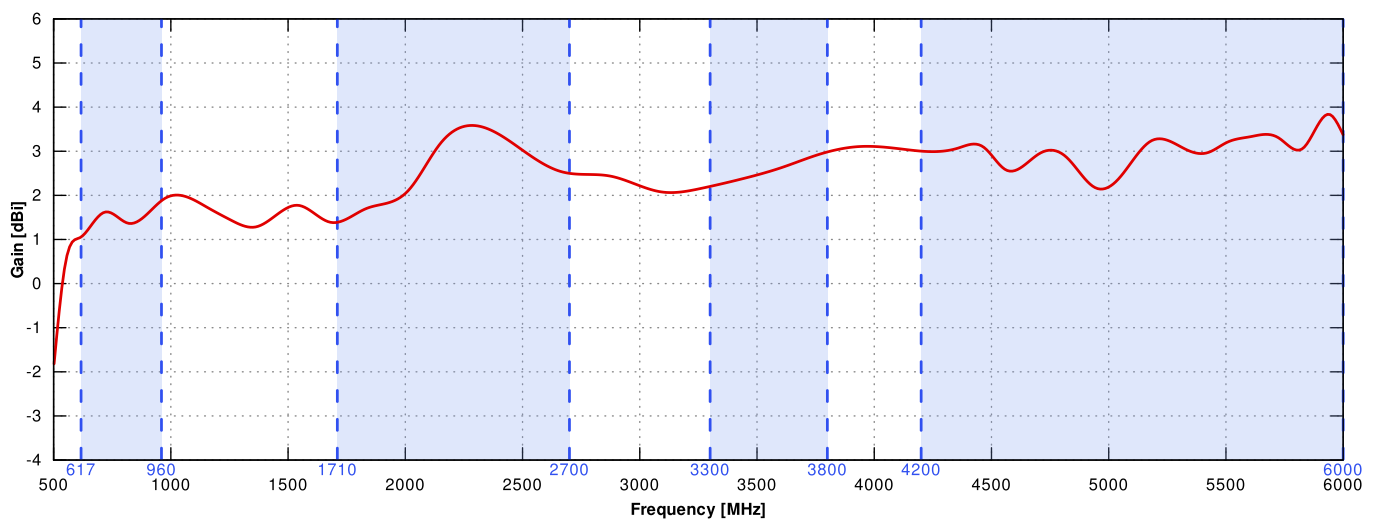


Wi-Fi - V VSWR

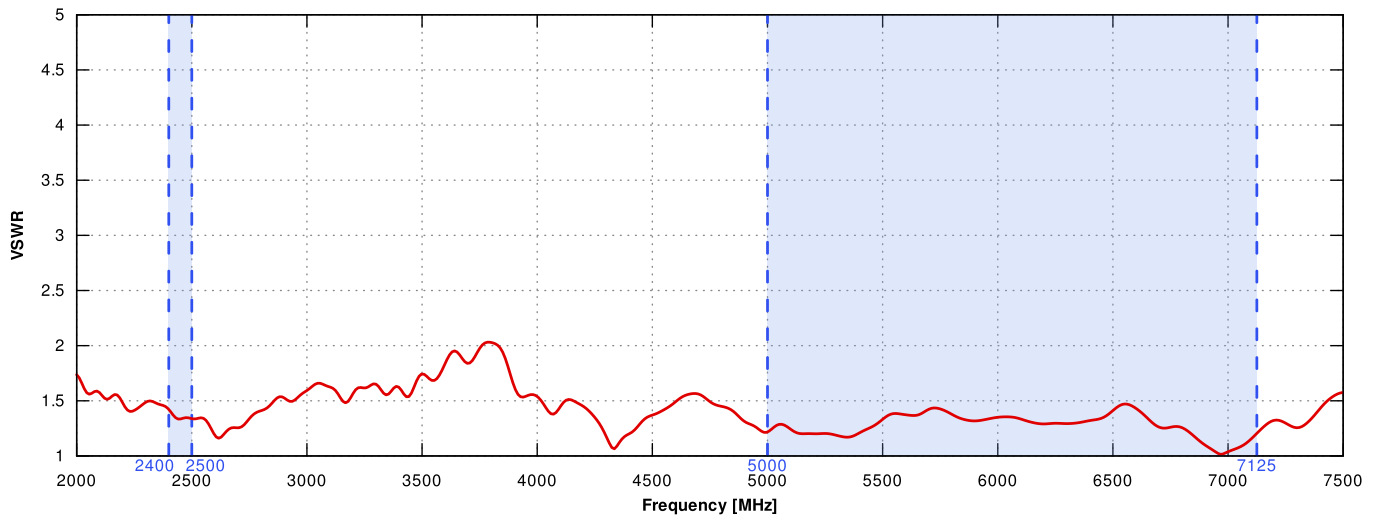


Wi-Fi - V Gain

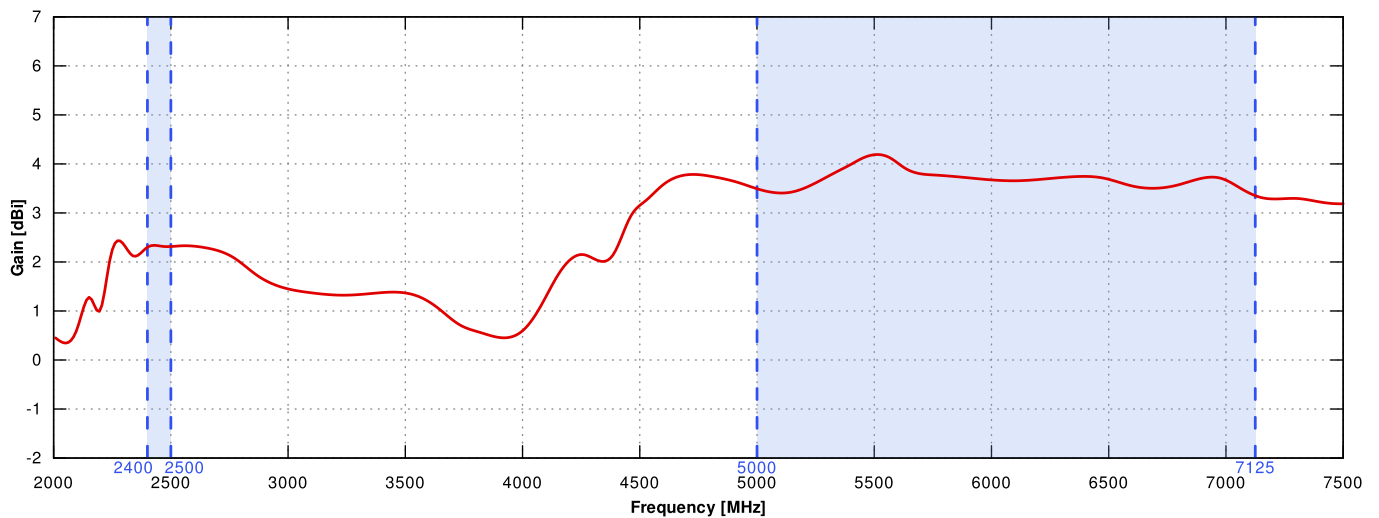


5G/LTE from 617MHz to 960MHz

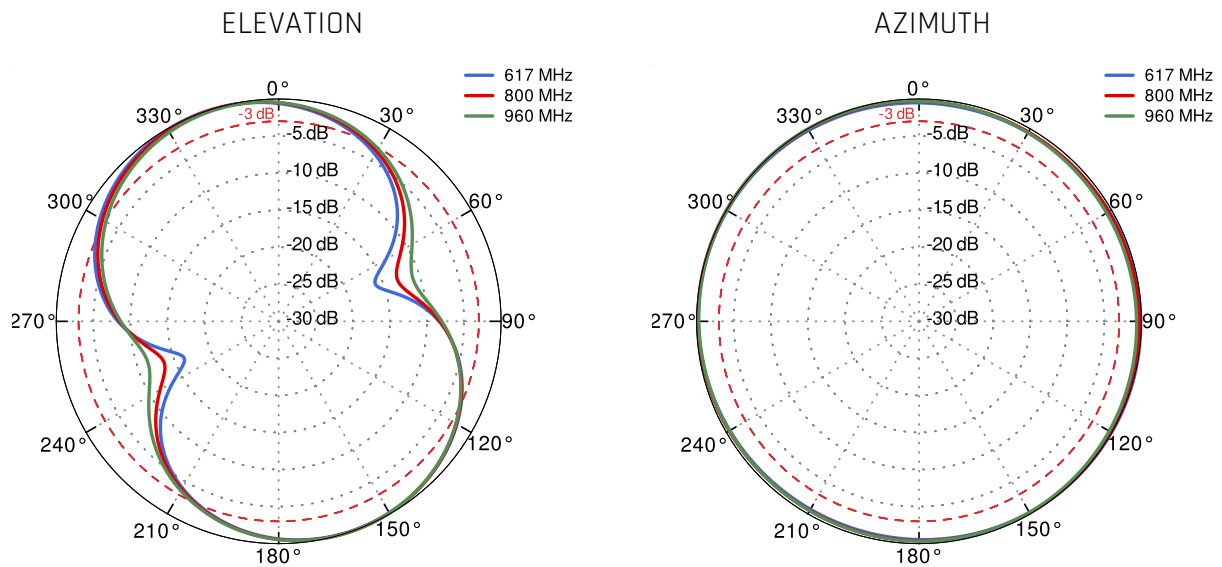


5G/LTE from 1.71GHz to 2.7GHz

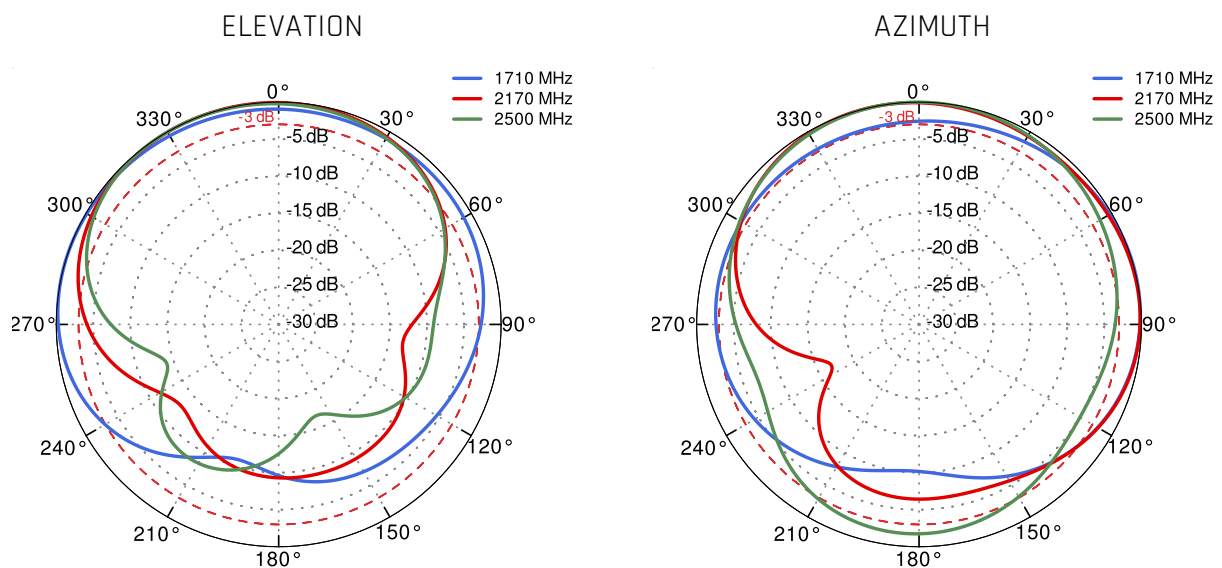

5G/LTE from 3.3GHz to 4.2GHz

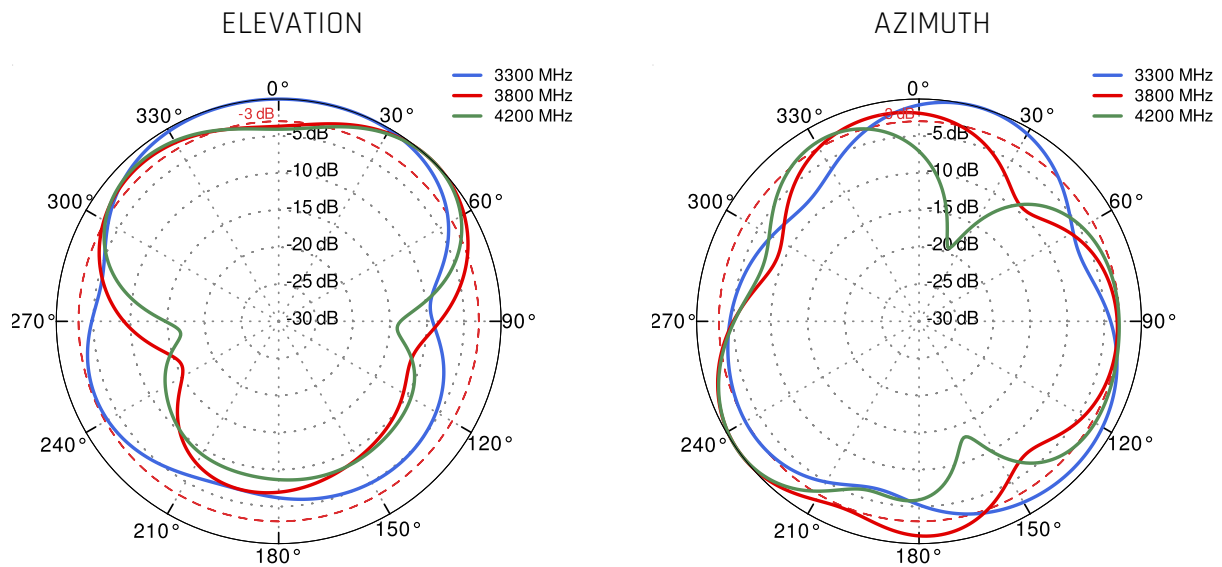

5G/LTE from 4.8GHz to 5.8GHz

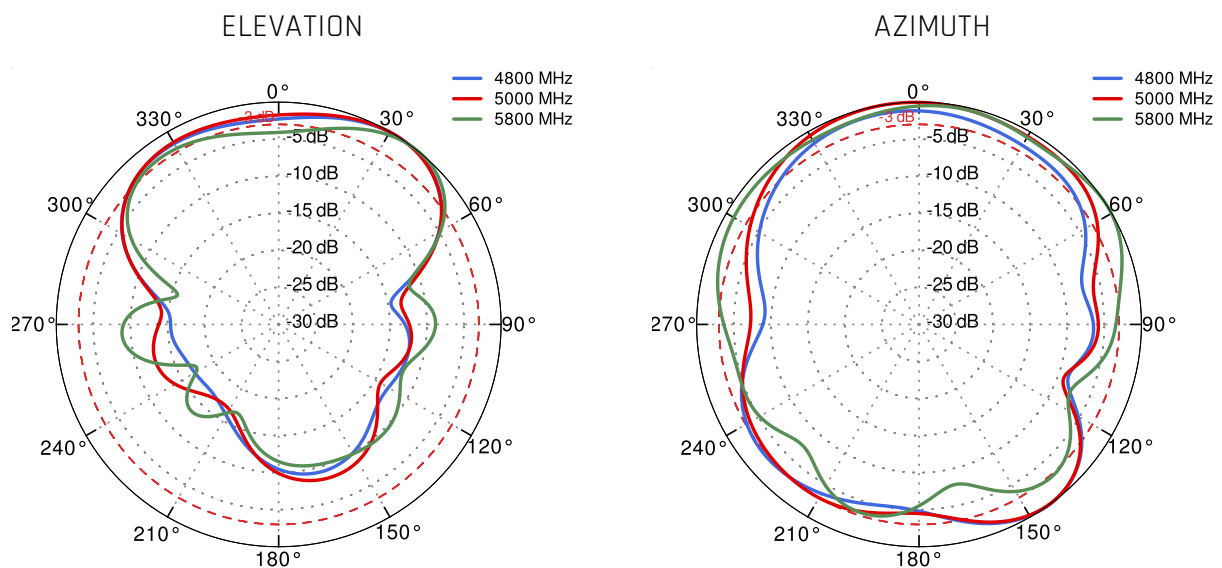

Wi-Fi V From 2.4 GHz to 6.5 GHz

