


QuMax Omni for Cisco 9120AXE

Integrated outdoor enclosure + 4x Wi-Fi Omni Antenna + place to install Cisco 9120AXE (All-in-one)

The QuMax Omni all-in-one antenna, designed for the Cisco 9120AXE access point, is an ideal outdoor solution for both mobile and fixed installations, including industrial setups, public spaces, CCTV, hotspots, yachts, boats, campers, and RVs. It features 4 omni-directional Wi-Fi antennas and is built to withstand harsh environments with its IP67-rated enclosure, ensuring protection against dust and water.

Additionally, the antenna offers a custom, easy-to-use mounting system for securely installing the access point inside the enclosure.

When paired with the 9120AXE, the QuMax Omni antenna provides a fully integrated solution with a built-in access point, offering seamless connectivity for a wide range of applications.

 **Wi-Fi 6E**
2.4GHz + 5GHz
6GHz + 7GHz
8 dBi
OMNI
DIRECTIONAL
IP 67
-40° TO +80°

OUTDOOR ANTENNA WORKS IN ANY
WEATHER CONDITIONS, IP67




MOUNTING SYSTEM WITH TWO
PLANES, 60 DEGREES REGULATION



ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



MADE IN **EUROPE**

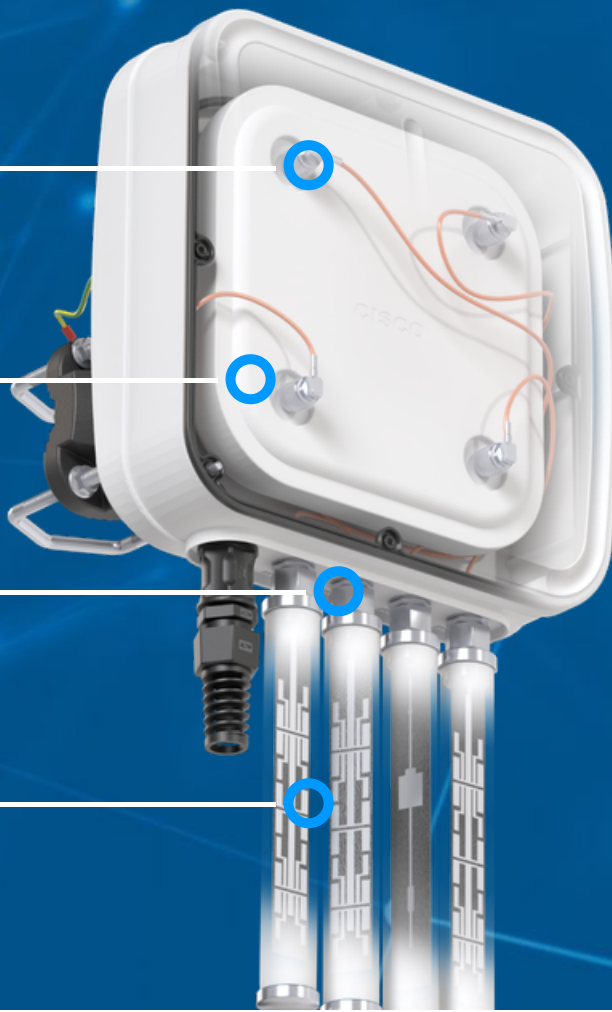

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6 dBi 5.0 - 6.0 GHz: 7.5 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	4x RPTNC to external NF
CABLE TYPE	RG316

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, Fiberglass
CONNECTOR TYPE	RJ45 4x external NF
INGRESS PROTECTION	IP67
DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F

**ENCLOSURE RECOMMENDED
TIGHTENING TORQUE**


0.6 - 0.8 Nm

MAST DIAMETER


25-66mm
0.98-2.60 inch

PLOTS



VSWR

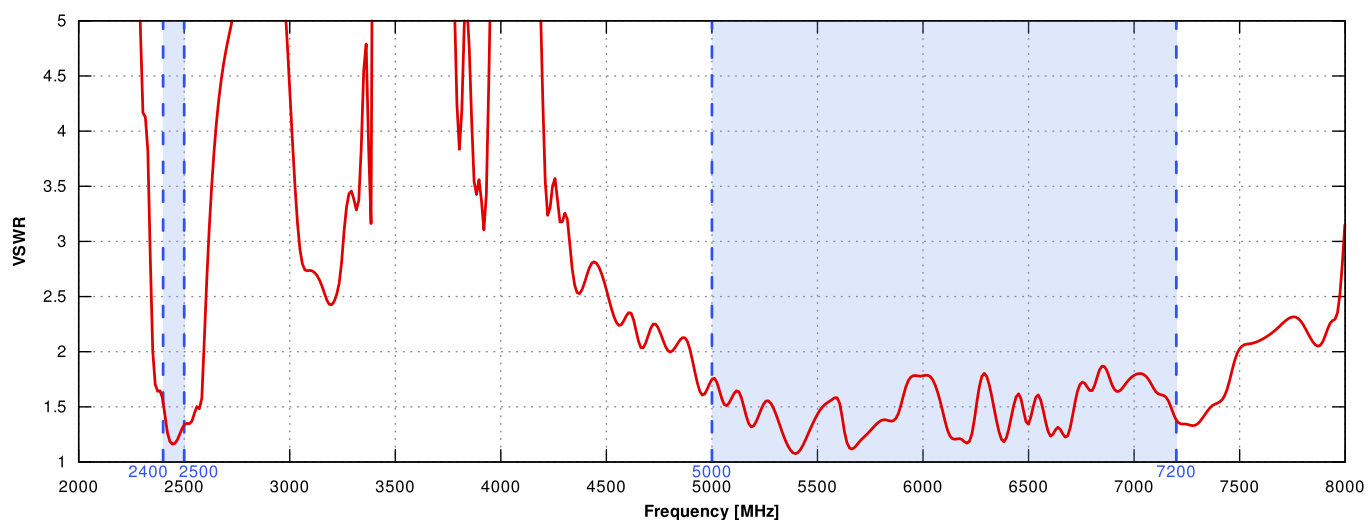

GAIN

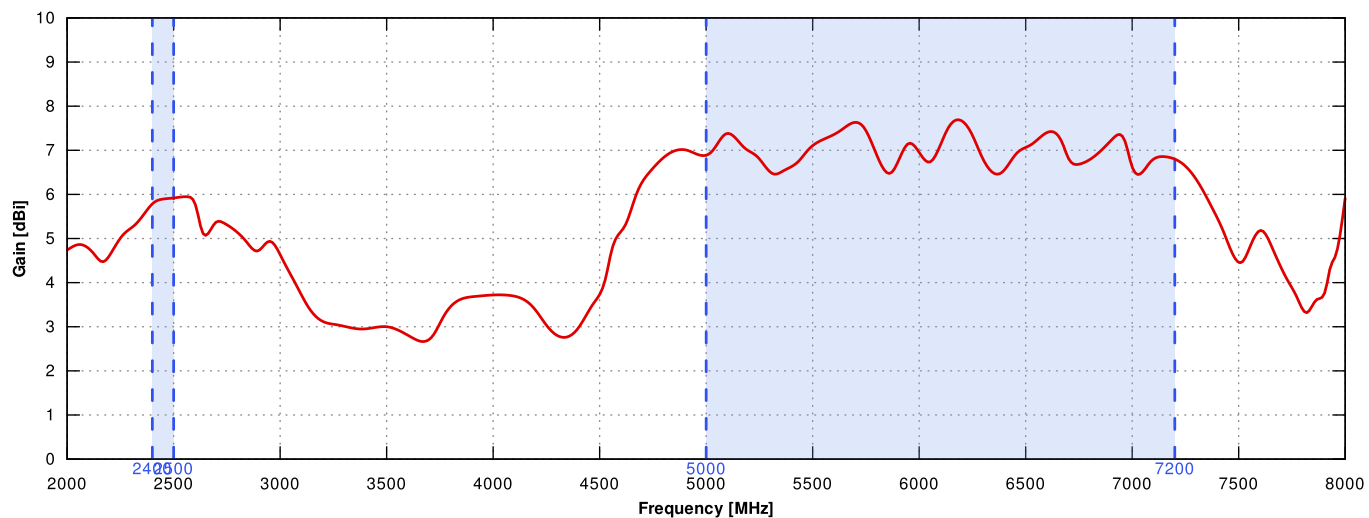

Wi-Fi From 2.4 GHz to 6.5 GHz

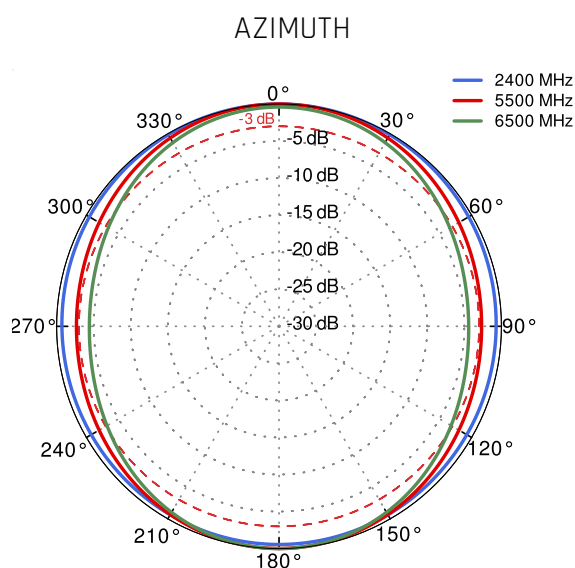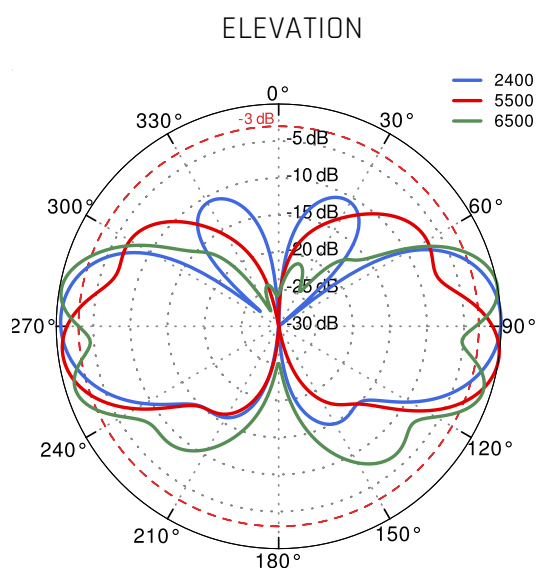

DIMENSIONS

