


QuMax Omni for Peplink MAX BR1 Mini 5G

INTEGRATED MULTI-BAND 5G OMNI ANTENNA + PLACE TO INSTALL PEPLINK MAX BR1 MINI 5G (ALL-IN-ONE)

QuMax Omni all-in-one antenna for Peplink MAX BR1 Mini 5G router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni 4*5G antenna. If you use MAX BR1 Mini 5G with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

5G
694-6000MHz
7 dBi
**OMNI
DIRECTIONAL**
IP 67
-40° TO +80°

OUTDOOR ANTENNA WORKS IN ANY
WEATHER CONDITIONS, IP67




ANTENNA PERFECTLY MATCHED WITH
THE PEPLINK MAX BR1 MINI 5G



ALL ANTENNAS AND PEPLINK ROUTER
INTEGRATED IN ONE ENCLOSURE



MADE IN **EUROPE**

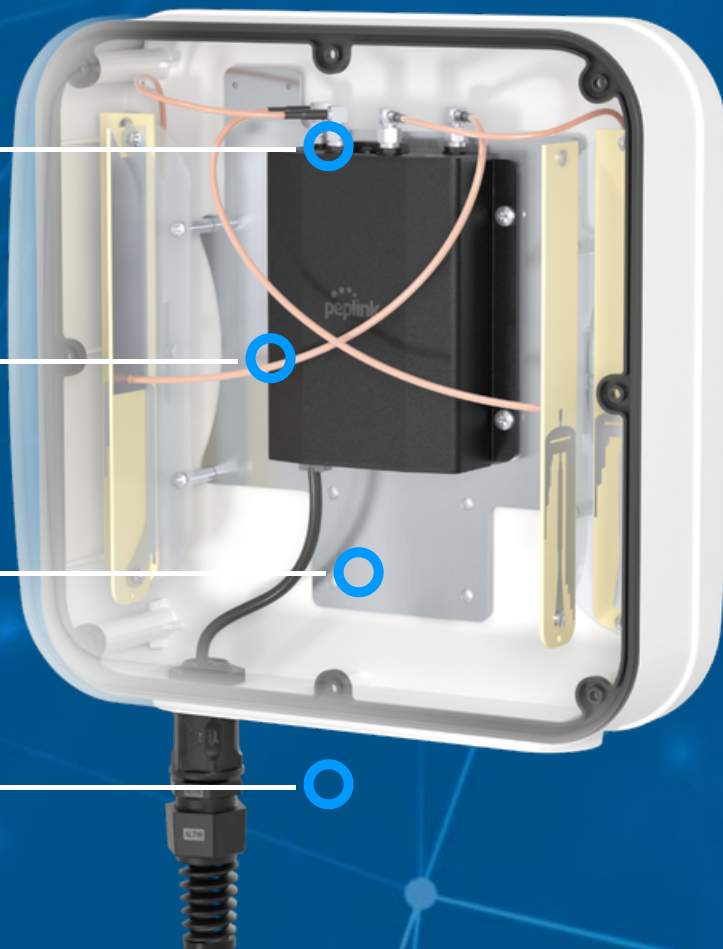

5G / LTE SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.7 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 : 2.5dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION


MATERIAL	BS, aluminum, PTFE, Fiberglass
INGRESS PROTECTION	IP67
CONNECTOR TYPE	RJ45
DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.6 - 0.8 Nm

MOUNTING KIT


DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 66mm 0.98-2.60 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
WEIGHT	0.87kg
MOUNTING PLACE	Wall or mast or ceiling

PLOTS



5G/LTE VSWR

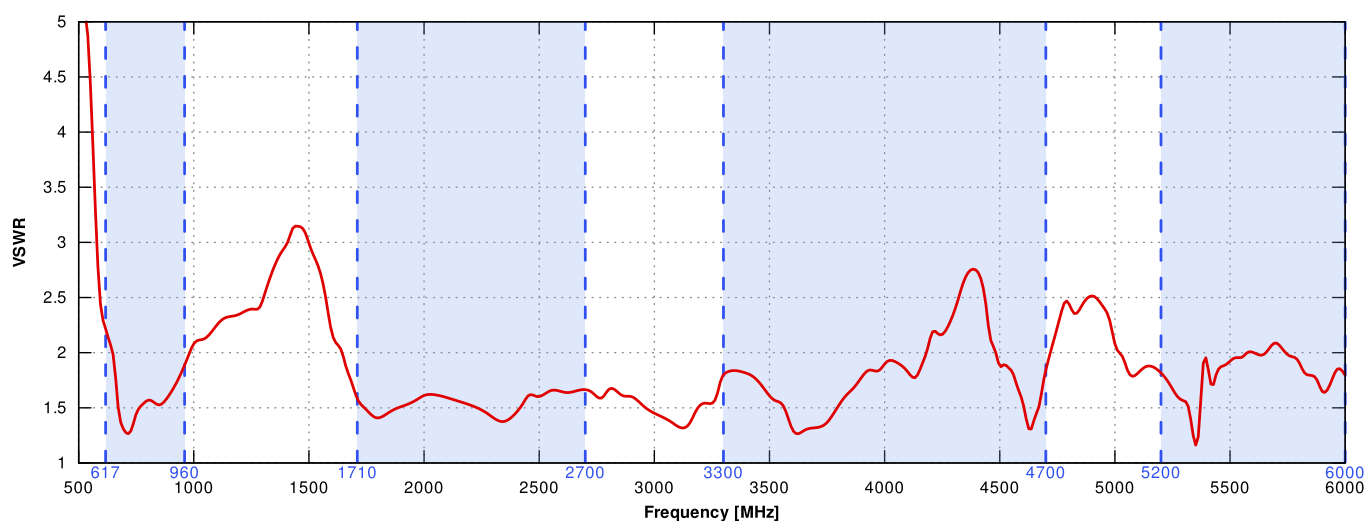



5G/LTE Gain

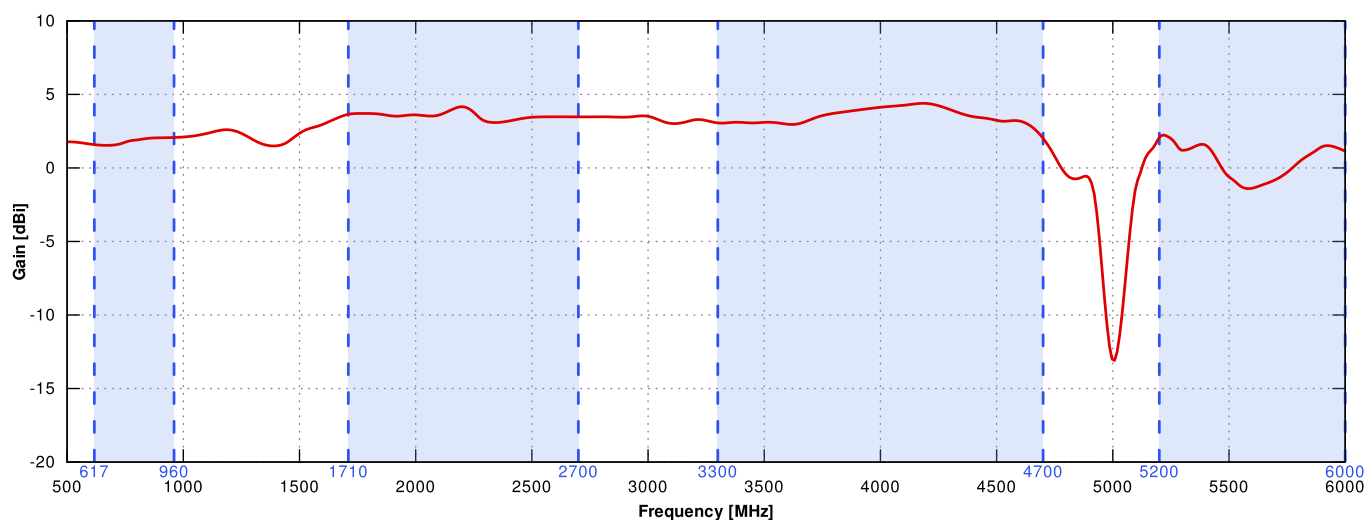


5G/LTE from 617MHz to 950MHz

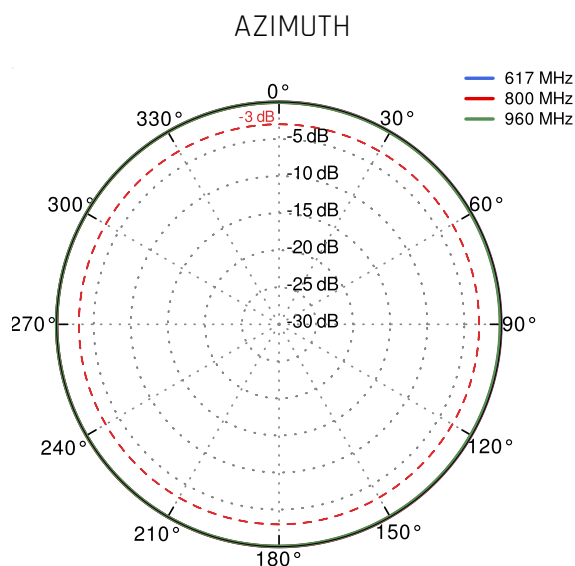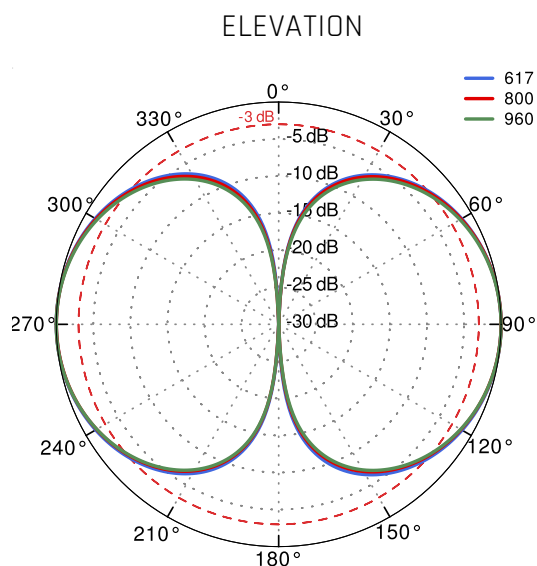


5G/LTE from 1.71GHz to 2.5GHz

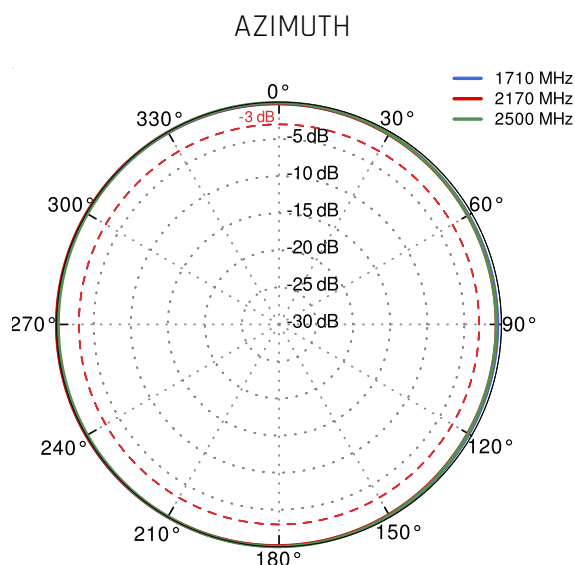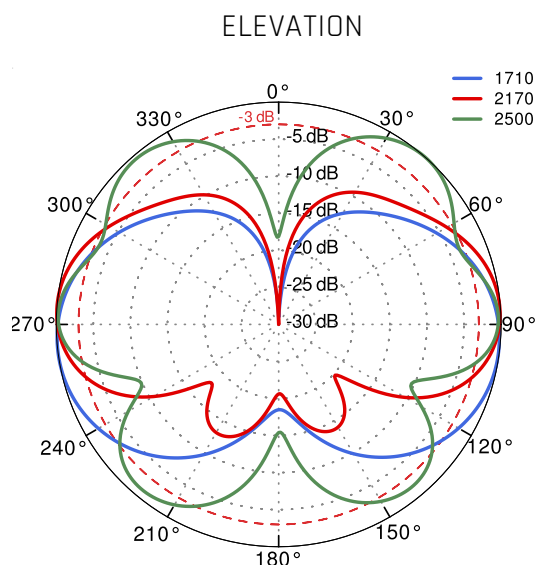

5G/LTE from 3.3GHz to 4.2GHz

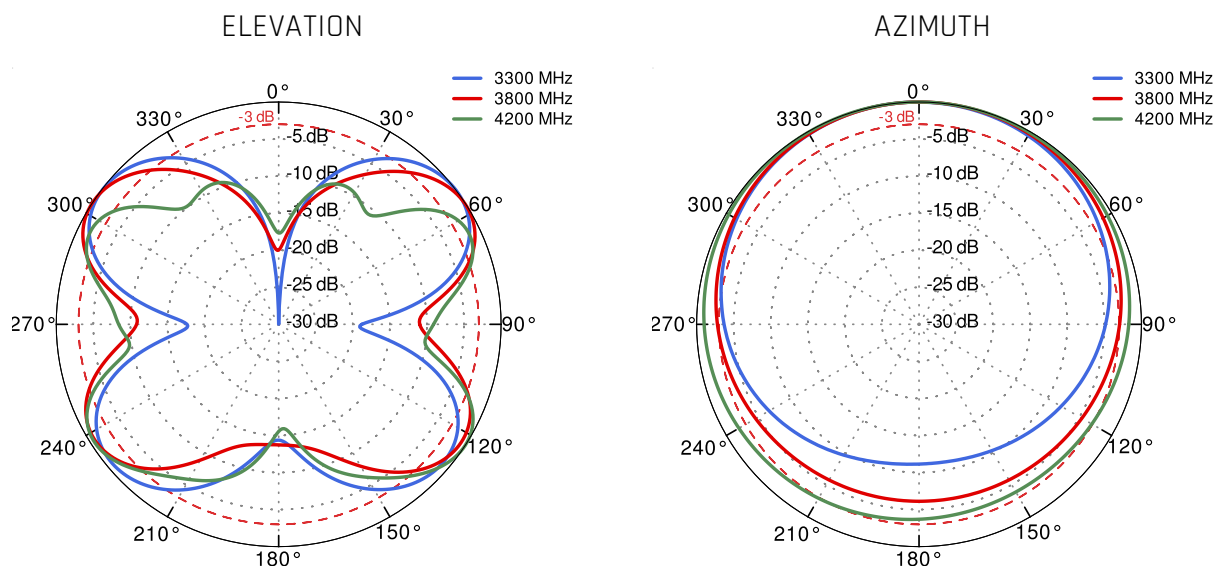

5G/LTE from 4.6GHz to 5.5GHz

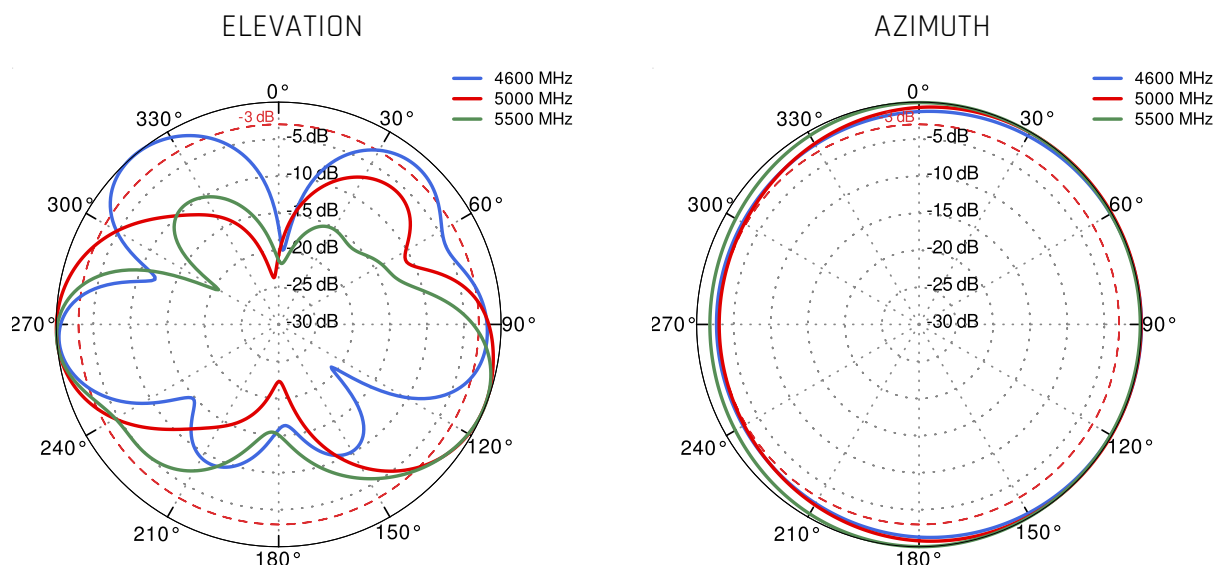

DIMENSIONS



Sales email: sales@quwireless.com

Support email: support@quwireless.com

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

WWW.QUWIRELESS.COM

Tel: +48 513 900 416

Website: www.quwireless.com

