

QuMax Omni for Teltonika TCR100

INTEGRATED MULTI-BAND LTE OMNI ANTENNA + PLACE TO INSTALL Teltonika TCR100 (ALL-IN-ONE)

QuMax Omni all-in-one antenna for Teltonika TCR100 router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni LTE antenna. If you use TCR100 with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.



OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP68




ANTENNA PERFECTLY MATCHED WITH THE TELTONIKA TCR100



ALL ANTENNAS AND TELTONIKA ROUTER INTEGRATED IN ONE ENCLOSURE



MADE IN EUROPE

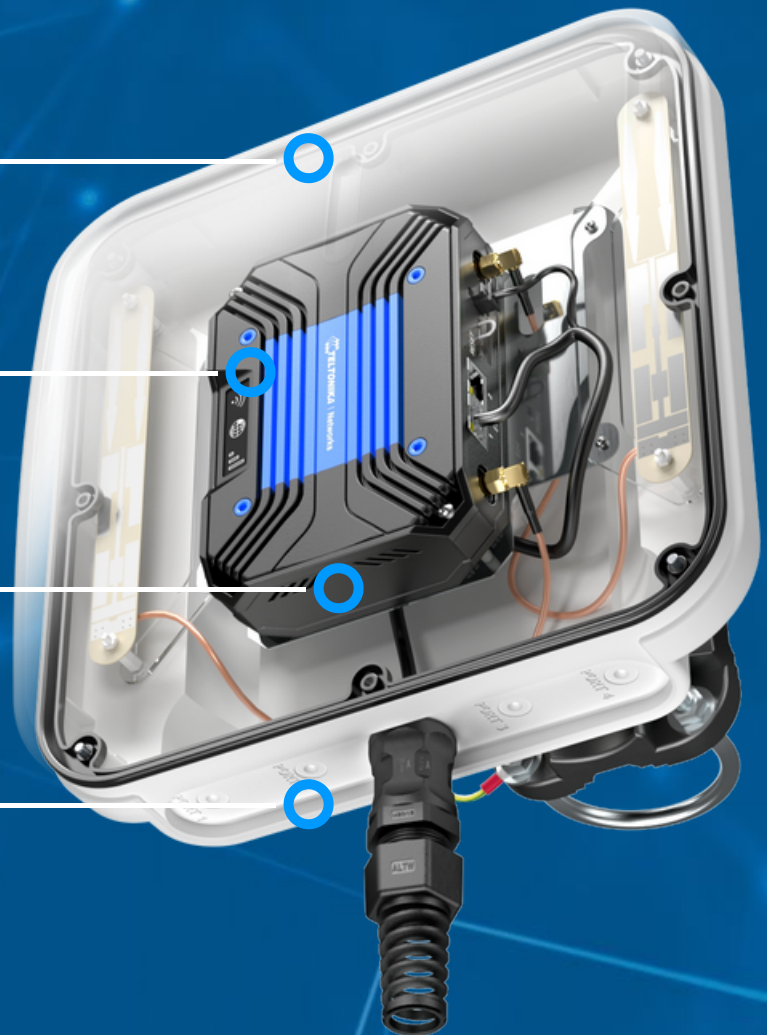

LTE SPECIFICATION

FREQUENCY	0.694-0.96 GHz 1.7 - 2.2 GHz 2.5 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 33, 34, 35, 36, 37, 38, 39, 44, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n95
GAIN	0.694 - 0.96 GHz : 4 dBi 1.7 - 2.2 GHz : 5 dBi 2.5 - 2.7 GHz : 6 dBi
VSWR	<1.50, max <2.50
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION


MATERIAL	BS, aluminum, PTFE, Fiberglass
INGRESS PROTECTION	IP68
CONNECTOR TYPE	RJ45
DIMENSIONS	272 x 276 x 80 mm 10.71 x 10.87 x 3.14 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.6 - 0.8 Nm

MOUNTING KIT


DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 66mm 0.98-2.60 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
WEIGHT	0.87kg
MOUNTING PLACE	Wall or mast or ceiling

PLOTS



VSWR

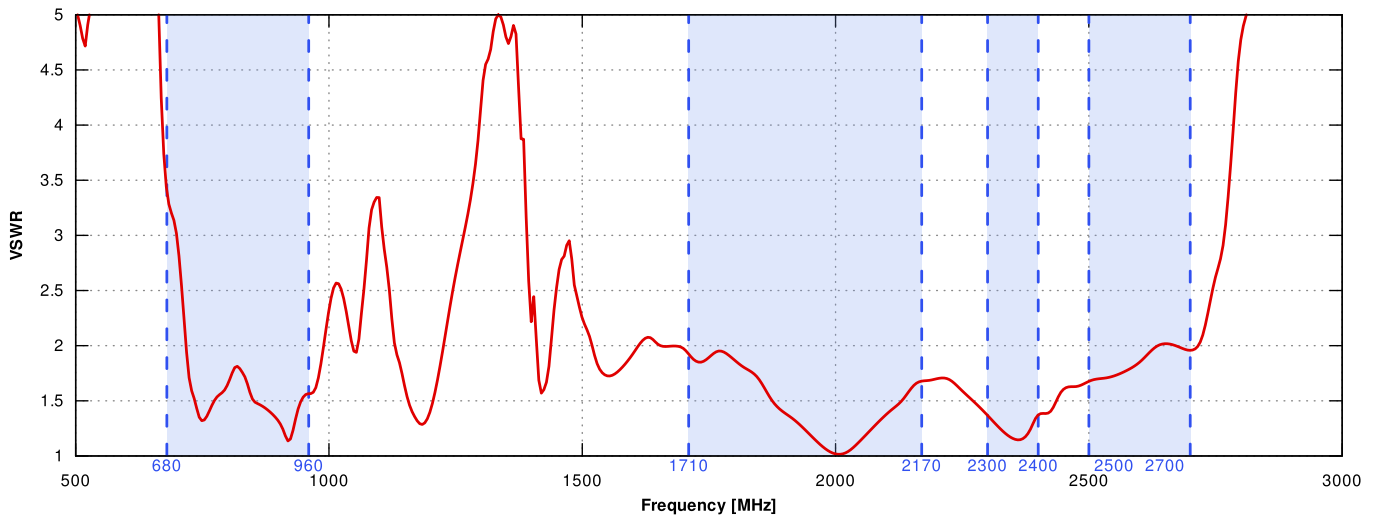



Gain

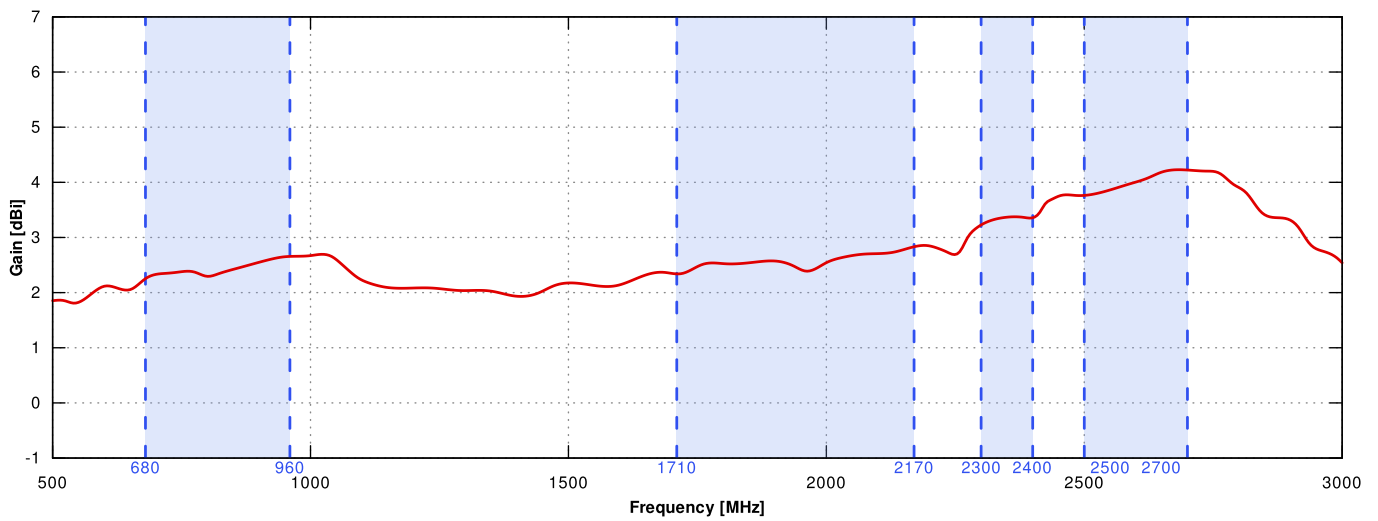


From 700MHz to 900MHz

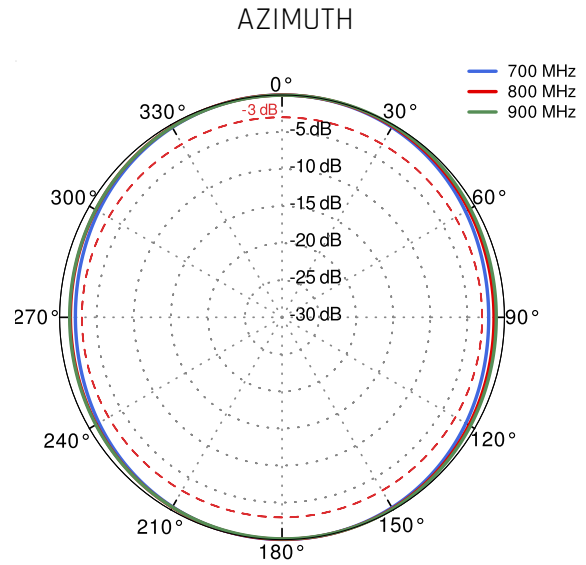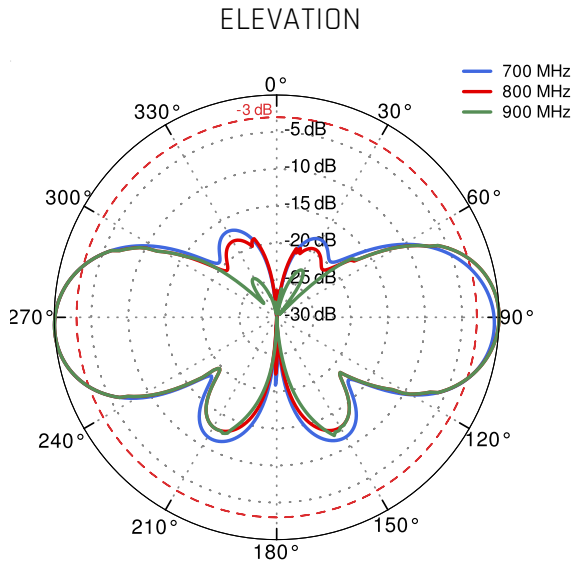

From 1.71GHz to 2.17GHz

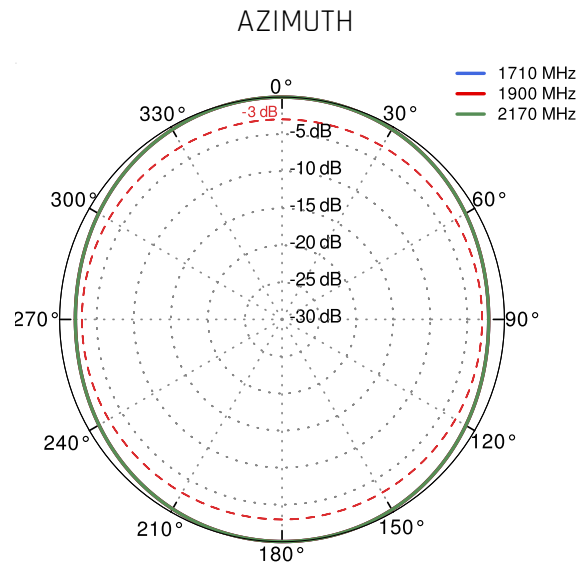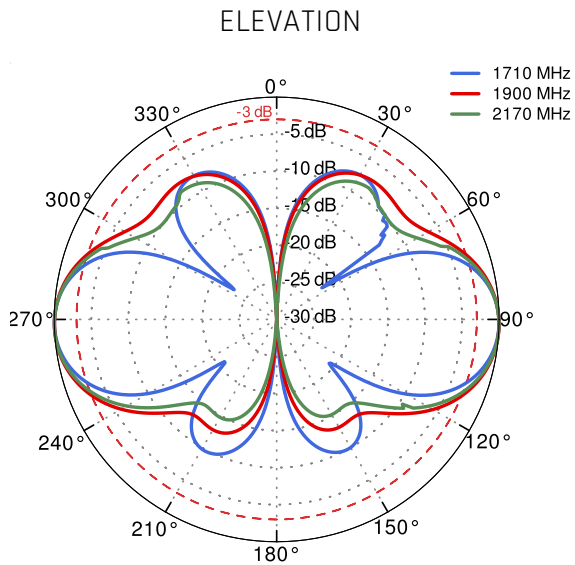

From 2.3GHz to 2.7GHz

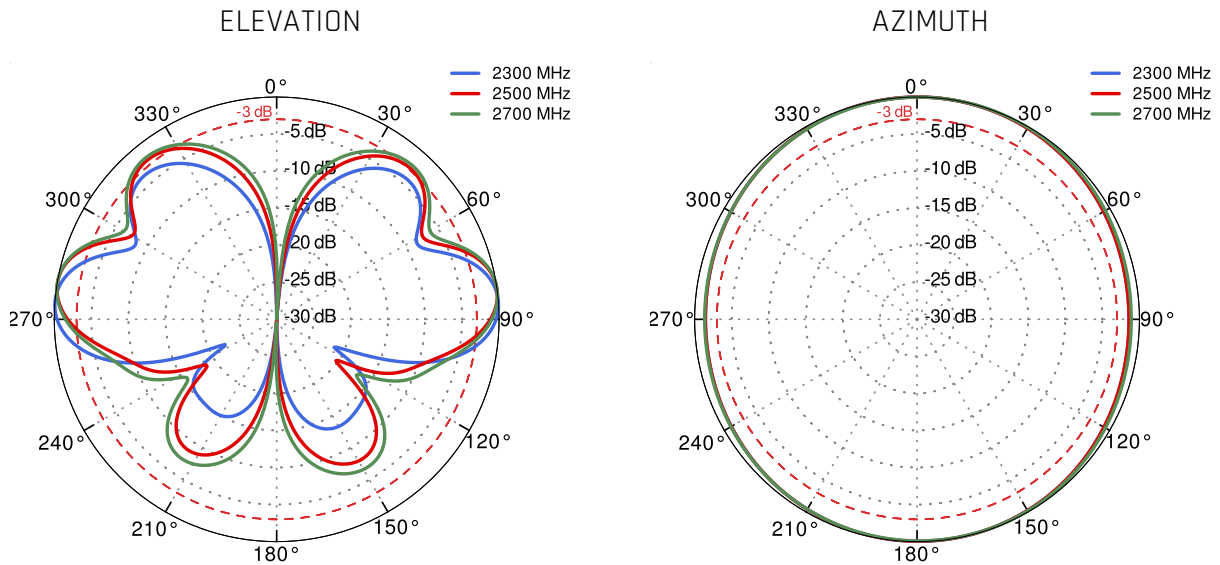

DIMENSIONS

